

High Temperature Series

Nickel-Cadmium

VNT Cs



The new VNT series benefits from innovative PNE (plastic-bonded nickel electrode) technology, a new positive electrode offering improved energy density.

The VNT Cs is specially designed to accept a permanent charge in high temperature environment such as emergency lighting equipment (minimum of 4 years up to + 40°C as required by the IEC 61951-1 standard).

To meet customers' requirements, Saft provides custom-designed and standard battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

Main advantages

- Good charge efficiency at high temperatures
- Permanent charge
- Good storage retention
- Long life duration

Technology

- Plastic-bonded positive electrode
- Plastic-bonded negative electrode

Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	1650
IEC minimum capacity (mAh)*	1600
IEC designation	KRMT 23/43
Impedance at 1000 Hz (m Ω)	8

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	22.0 + 0.15/- 0.05
Height (mm)	41.9 ± 0.3
Top projection (mm)	0.8 ± 0.2
Top flat area diameter (mm)	9.0 min
Weight (g)	45

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard*	16	+ 15 to + 40	160
Permanent**		+ 15 to + 40	80
Trickle**		+ 15 to + 40	40 to 53

* End of charge cut-off is requested: timer, coulomb meter, or dT°C / dt

** follows full charge

Maximum discharge current

Continuous (A) at + 20°C	5.2
Peak (A) at + 20°C*	40

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.



saft

Temperature range in discharge
 - 20°C to + 70°C


Storage

Recommended: + 5°C to + 25°C
 Relative humidity: 65 ± 5 %


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions are in mm.

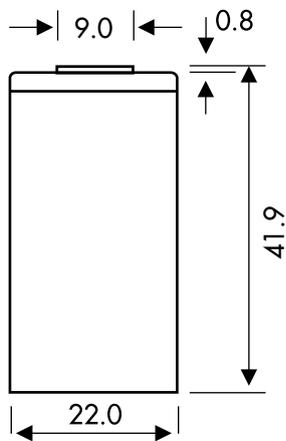


Charge 16h at C/10 at room temperature

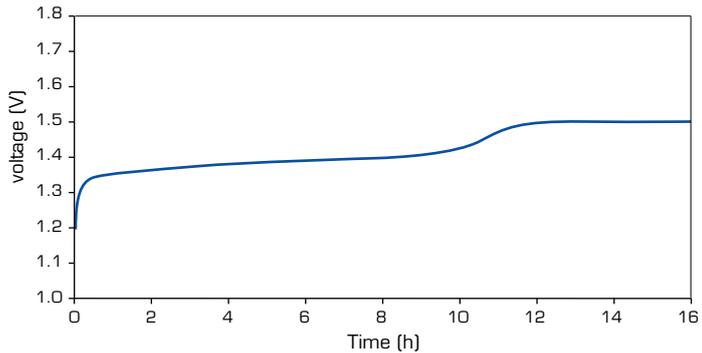


Charge 24h at C/20 at different temperatures

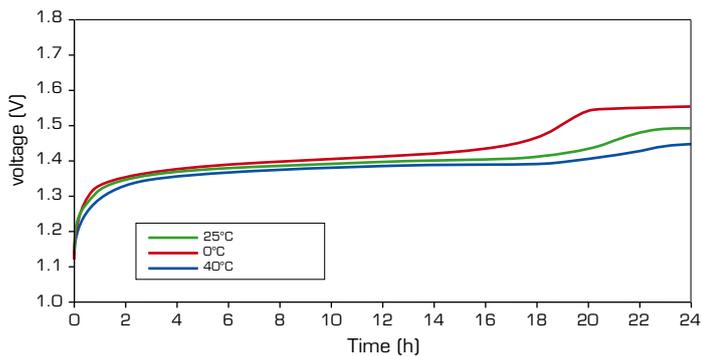

Discharge at C/2 at different temperatures, after charge 24h at C/20 and rest 1h

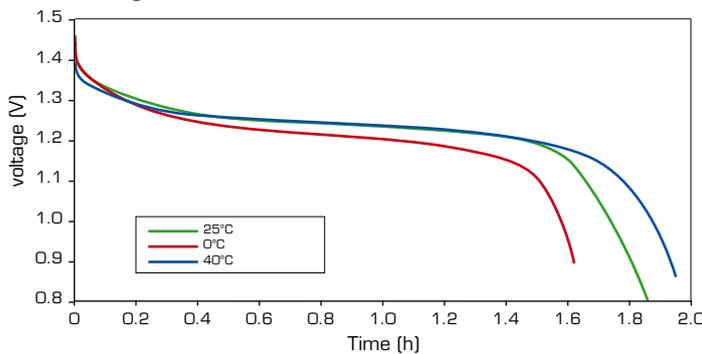

Charge efficiency after charge at C/20 and discharge at C/5 at different temperatures

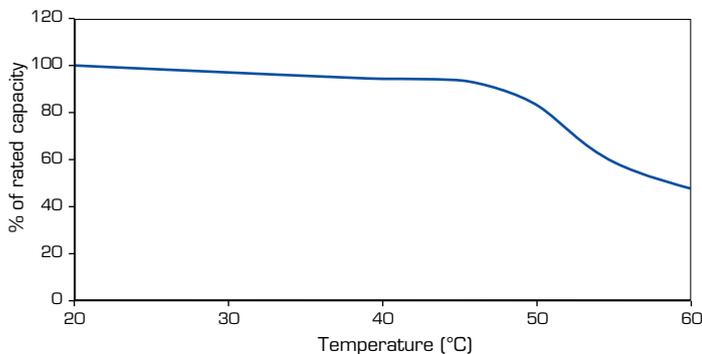

Data are given for single cells.
 Please consult Saft for any use of this cell in other conditions than those given in this data sheet.

Saft
Rechargeable Battery Systems
 12, rue Sadi Carnot
 93170 Bagnolet - France
 Tel.: +33 (0)1 49 93 19 18
 Fax: +33 (0)1 49 93 19 68
 Email: rbs.info@saftbatteries.com

www.saftbatteries.com

DOC N°11117-2-0309
 Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.
 Photo credits: Saft
 Published by the Communication Department
 Saft S.A. Stock capital 31.944.000
 RCS Bobigny B 383 703 873
 Designed by Soyouzgraphic.com

