

High Temperature Series

Nickel-Cadmium

VNT D U

The new VNT U series benefits from the latest innovation on Saft's PNE (plastic bonded nickel electrode) technology. The VNT U series operates until + 55°C but also brings an improvement at low temperature, suiting perfectly with severe outdoor applications.

VNT D U is specially designed to accept a permanent charge in high temperature environment such as emergency lighting equipment. VNT D U offers at least 4 years of life duration at an average temperature up to + 50°C in accordance to the IEC 61951-1 standard (U type cells).

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

Main advantages

- Good charge efficiency at high temperature
- Good autonomy at low temperature
- Permanent charge
- Good storage retention
- Long life duration at high temperature

Technology

- Plastic-bonded positive electrode
- Plastic-bonded negative electrode

Temperature range in discharge
- 20°C to + 70°C



Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	4250
IEC minimum capacity (mAh)*	4000
IEC designation	KRMU 33/62
Impedance at 1000 Hz (mΩ)	6

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	32.15 ± 0.1
Height (mm)	59.9 ± 0.4
Top projection (mm)	3.1 ± 0.4
Top flat area diameter (mm)	5.6
Weight (g)	115

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard *	16	+ 15 to + 55	400
Permanent		+ 15 to + 55	200
Trickle **			100 to 130

* End of charge cut-off is requested: timer, coulomb meter.

** Trickle charge follows full charge.

Maximum discharge current

Continuous (A) at + 20°C	14
Peak (A) at + 20°C*	150

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.



saft

Storage


Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %


Typical performances

For graph shown, C is the IEC₅ capacity.


Dimensions in mm.

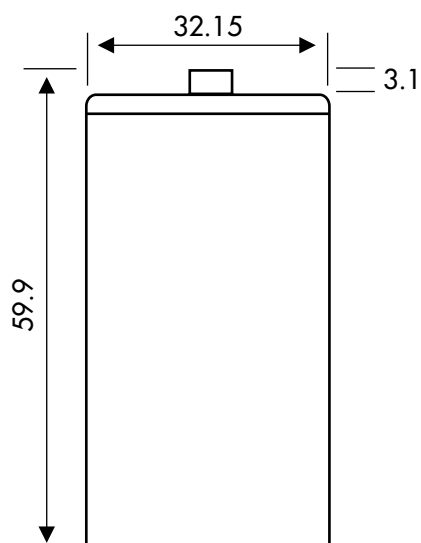


Charge 24h at C/20 at different temperature

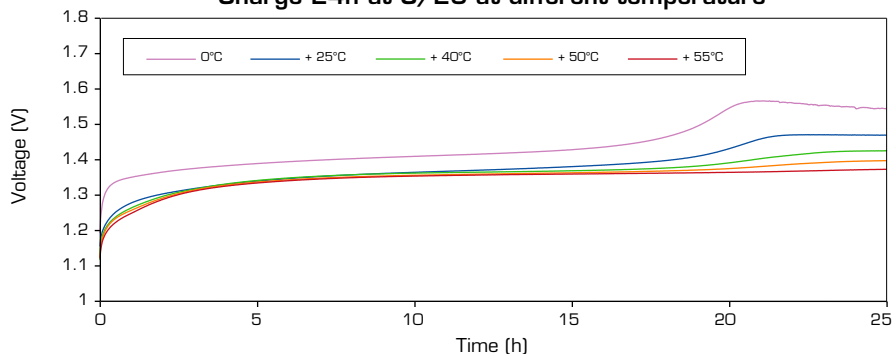


Discharge at 0.6C at different temperature after charge 24h at C/20 at different temperature

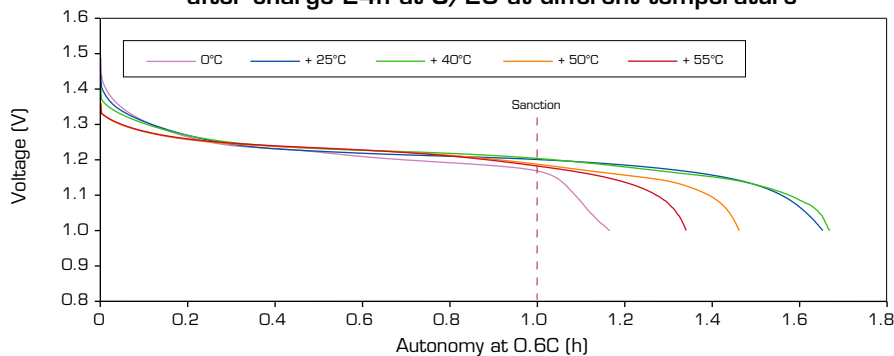

Charge efficiency after charge at C/20 and discharge at C/5 at different temperature

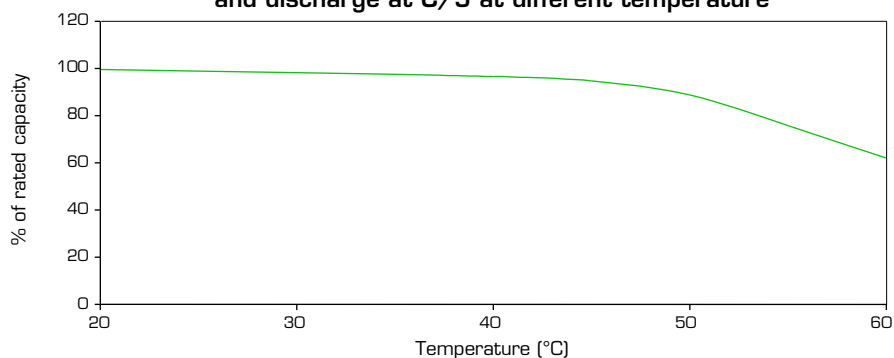

12 months at + 70°C simulates 4 years at + 50°C

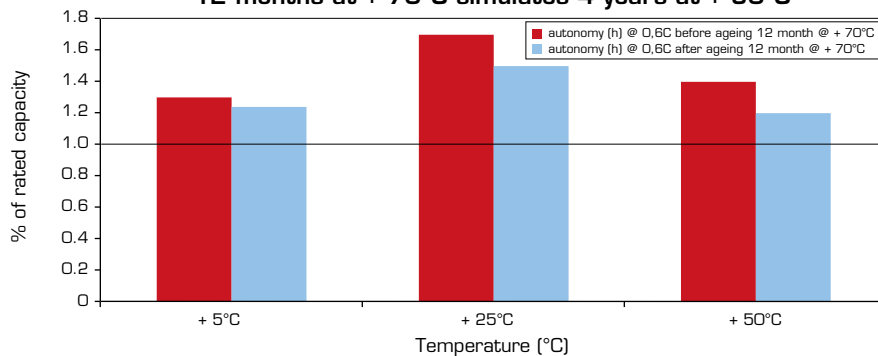

Saft

Industrial Battery Group

12, rue Sadi Carnot

93170 Bagnole - France

Tel.: +33 (0)1 49 93 19 18

Fax: +33 (0)1 49 93 19 68

Email: rbs.info@saftbatteries.com

www.saftbatteries.com

DOC N°11125-2-0909

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

Photo credits: Saft

Published by the Communication Department

Saft S.A. Stock capital 31.944.000 €

RCS Bobigny B 383 703 873

Designed by Soyouzgraphic



SAFT