

PHG/233S/P8037/

PAGE 3 OF 3
02A-(400)



Delmas G.m.b.H.
Wärmetauscher + Kühlanlagen



SCREW-IN RESISTANCE THERMOMETER

TYPE 90.2004/20

- Sensortype : Pt 100 acc. DIN EN 60751
(4 – wire)
class B
- Specifications : with plug connection
acc. DIN 43 650,
cable insertion PG 9
- stem diameter 8 mm,
EL = 200 mm,
G = 1/2"
- wetted parts in stainless steel
(1.4571)
- replaceable measuring device
(Pt 100 4 – wire)
- Temperature range: - 50 ... + 200 °C
(- 58 ... + 392 °F)
- Certificate : Germanischer Lloyd
Certificate No. 15 700-00 HH

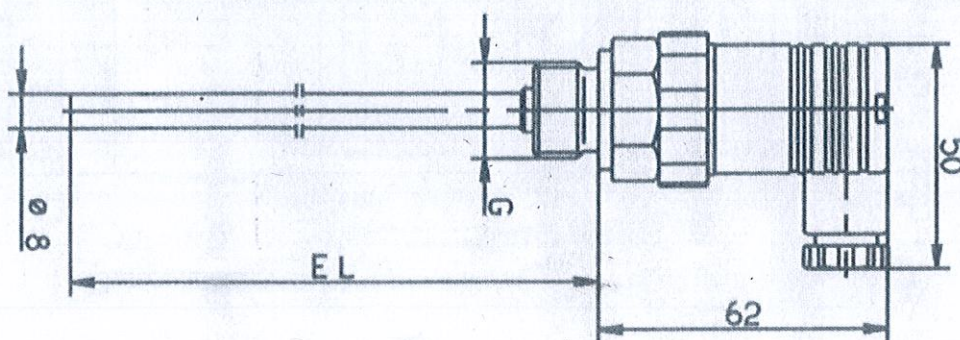
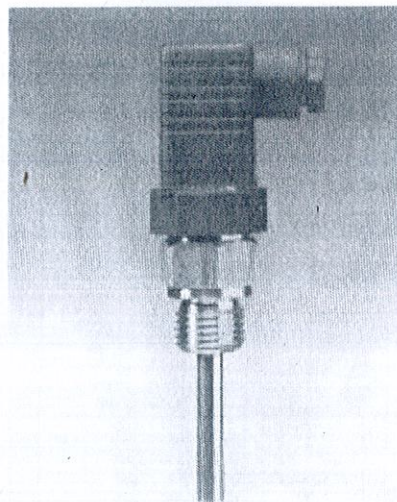


PT100 mit Stecker(engl)



SCREW-IN RESISTANCE THERMOMETER**TYPE 90.2004/20**

- Sensortype : Pt 100 acc. DIN EN 60751
(4 – wire)
class B
- Specifications : with plug connection
acc. DIN 43 650,
cable insertion PG 9
- stem diameter 8 mm,
EL = 200 mm,
G = 1/2"
- wetted parts in stainless steel
(1.4571)
- replaceable measuring device
(Pt 100 4 – wire)
- Temperature range: - 50 ... + 200 °C
(- 58 ... + 392 °F)
- Certificate : Germanischer Lloyd
Certificate No. 15 700-00 HH

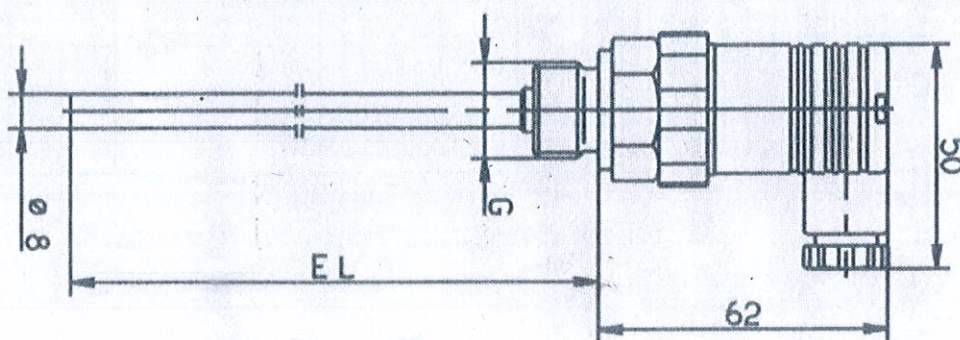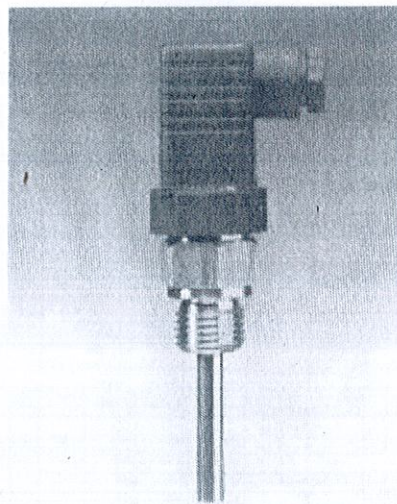

PT100 mit Stecker(engl)

