


CUST. P/N	MODEL	PART NO.	WATER SIDE TUBING MATERIAL
0512N-0192A	BTSSC-36-TJ	C-5272-5	COPPER: CDA 122
0512N-0199A	BTSSN-36-TJ	C-5272-6	90/10 CUPRONICKEL: CDA 706

REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED
B	REVISED RFGT PORTS	01-31-97	-	DV
C	GENERAL REVISION	04-07-98	-	DV
D	REVISED PER 13-027-ECN-03	03-29-13	TMP	FCS


NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT SCALE DRAWING.
3. MAXIMUM WORKING PRESSURE:
WATER SIDE - 500 PSIG
REFRIGERANT SIDE - 600 PSIG
4. UNIT SHOWN IS U.L. AND C.U.L. LISTED.
5. ALL CONNECTIONS ARE FREE OF BURRS FOR A MINIMUM OF ONE INCH.
6. UNITS ARE CLEAN FROM ALL FOREIGN MATTER BOTH INSIDE AND OUT.
7. ALL CONNECTIONS ARE CAPPED BEFORE SHIPPING.
8. UNIT SHOWN IS PAINTED.

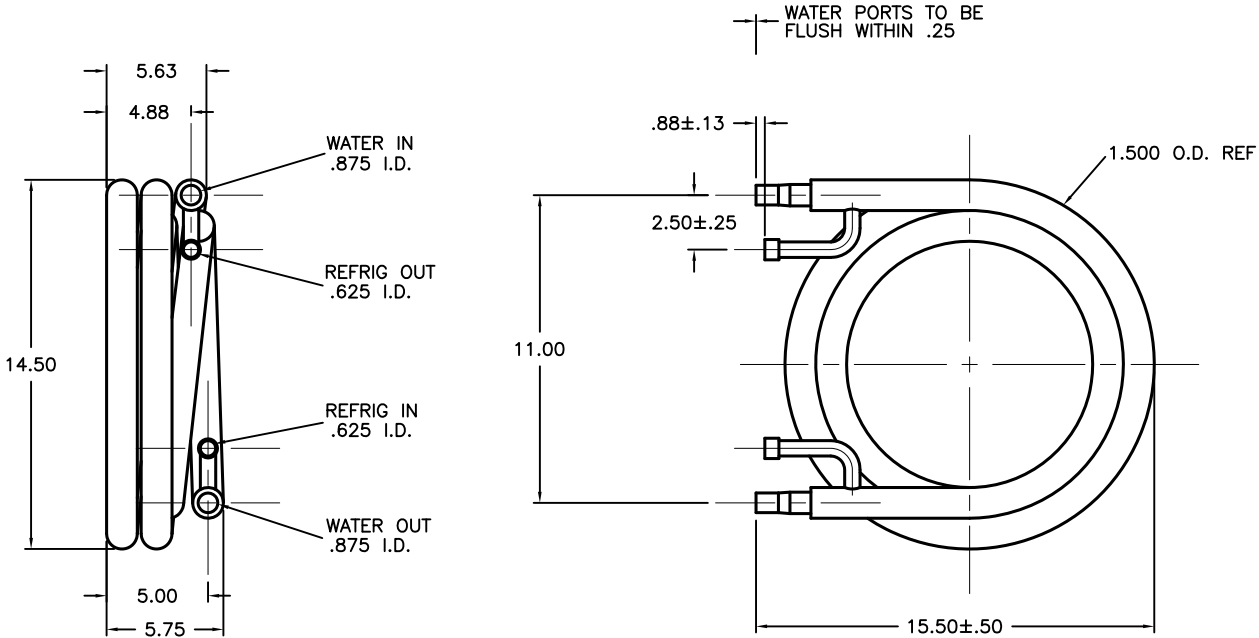

NOTICE
THE INFORMATION ON THIS DRAWING IS PROPRIETARY TO TURBOTEC PRODUCTS, INC., HICKORY, NC, AND MAY NOT BE REPRODUCED IN ANY MANNER OR FORM WITHOUT THE WRITTEN PERMISSION OR CONSENT OF TURBOTEC PRODUCTS, INC.

UNLESS OTHERWISE SPECIFIED
DIMENSION LIMITS:
TWO PLACES ± .38
THREE PLACES ± .003
ENGINEERING DEPARTMENT APPROVAL
REQUIRED ON SUBSTITUTIONS

APPROVALS		DATE	 TURBOTEC PRODUCTS, INC. 2042 FAIRGROVE CHURCH RD SE HICKORY, NORTH CAROLINA
DRAWN	JS	10-09-96	
CHECKED			
APPROVED	DV	10-09-96	
C-527236	SCALE: N/A	DWG. NO.: C-5272-5,-6	REV.: D

TITLE:
COND./EVAP.
BTSSC & N-36-TJ