


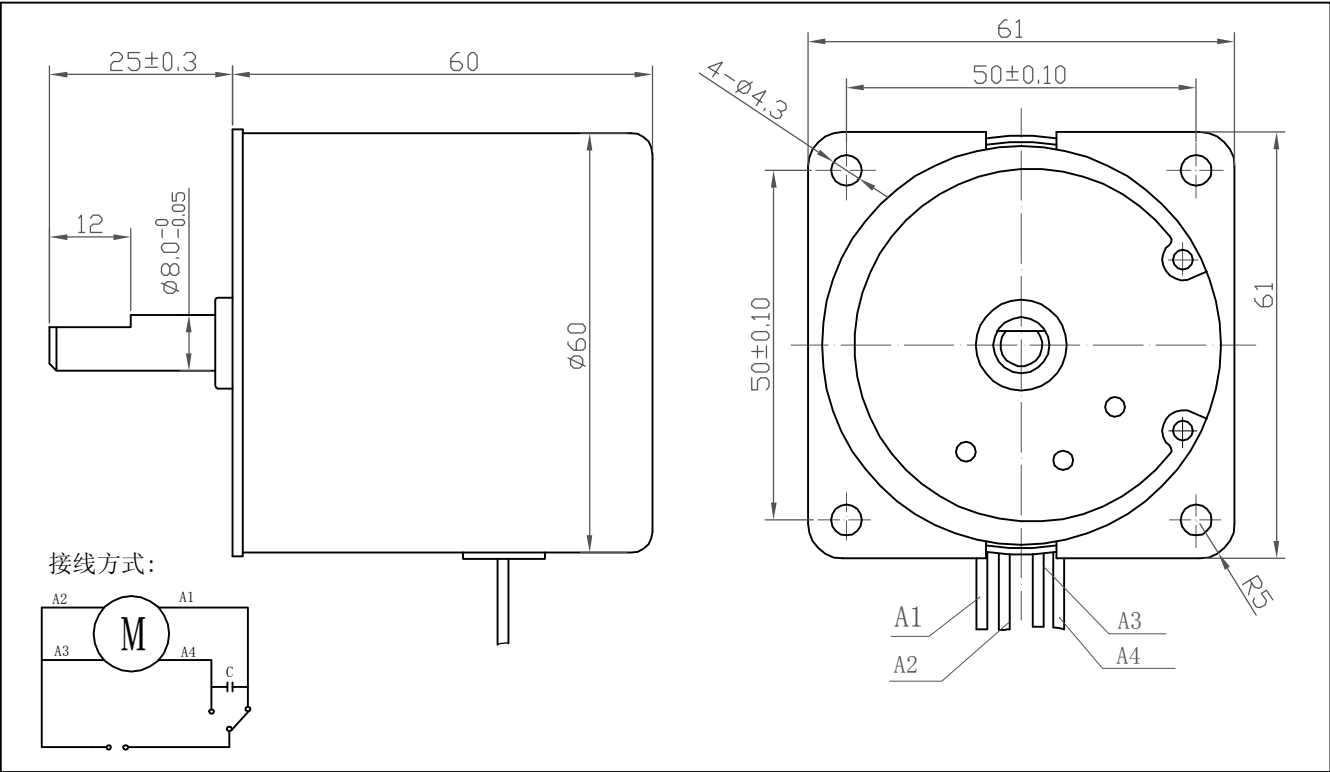


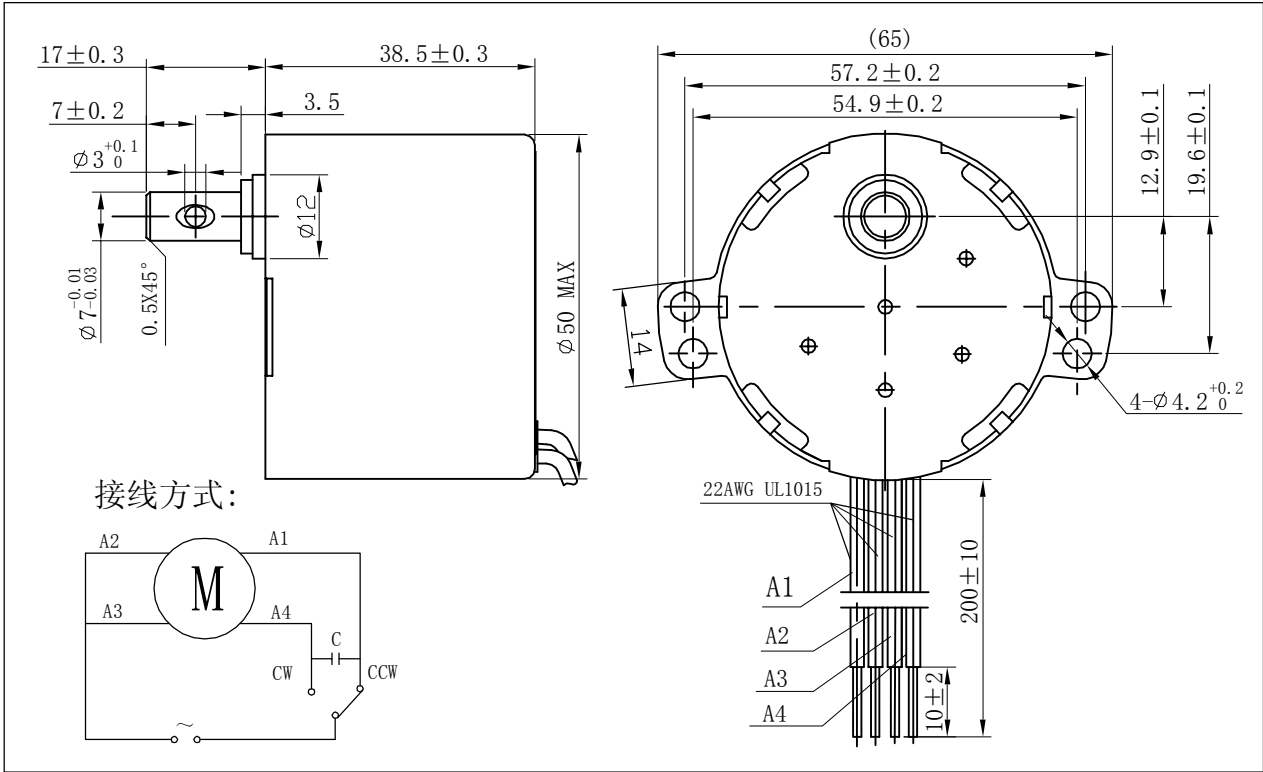


电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Poweer (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaquire Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class
TYC60K	AC220-240V	50/60	50/60	≤18	≤80	≥6.5	≤176	≤75	≤40	E
TYC60K	AC220-240V	50/60	5/6	≤18	≤80	≥50	≤176	≤75	≤40	E

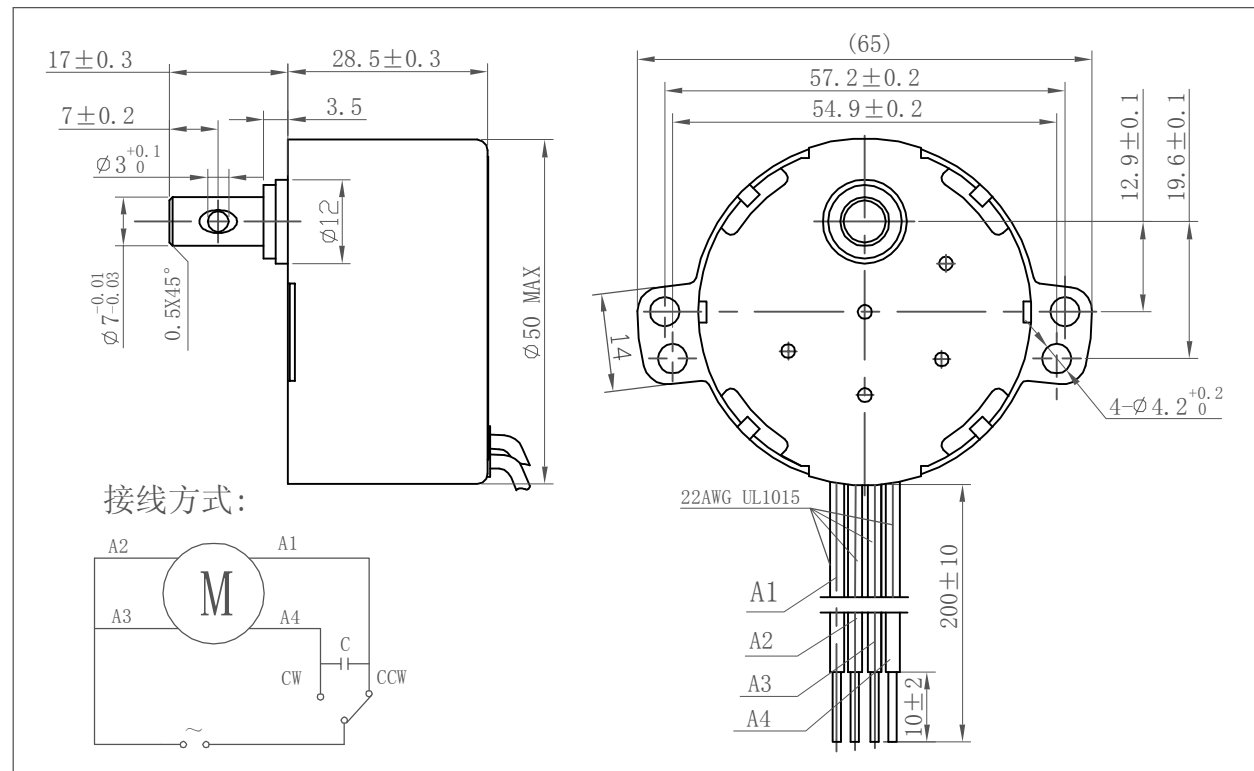



电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaure Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50K-38	AC220-240V	50/60	2.5/3	≤ 6	≤ 40	≥ 25	≤ 176	≤ 75	≤ 40	E	3C
TYC50K-38	AC220-240V	50/60	5/6	≤ 6	≤ 40	≥ 18	≤ 176	≤ 75	≤ 40	E	3C
TYC50K-38	AC220-240V	50/60	10/12	≤ 6	≤ 40	≥ 6.5	≤ 176	≤ 75	≤ 40	E	3C

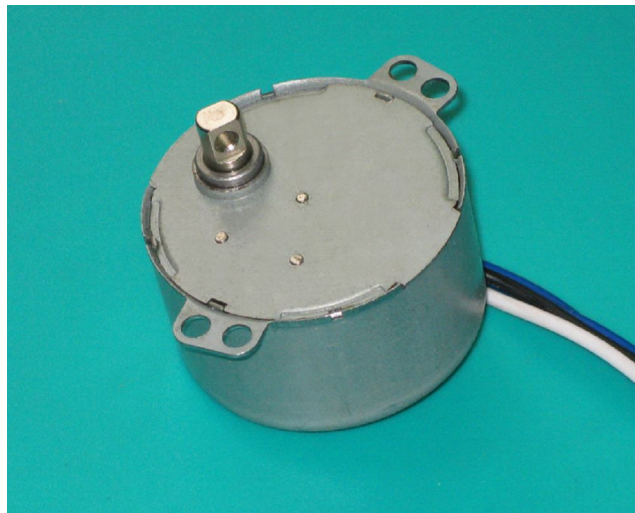


电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaure Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50K-28	AC220-240V	50/60	2.5/3	≤ 6	≤ 40	≥ 18	≤ 176	≤ 75	≤ 40	E	3C
TYC50K-28	AC220-240V	50/60	5/6	≤ 6	≤ 40	≥ 10	≤ 176	≤ 75	≤ 40	E	3C
TYC50K-28	AC220-240V	50/60	10/12	≤ 6	≤ 40	≥ 5	≤ 176	≤ 75	≤ 40	E	3C

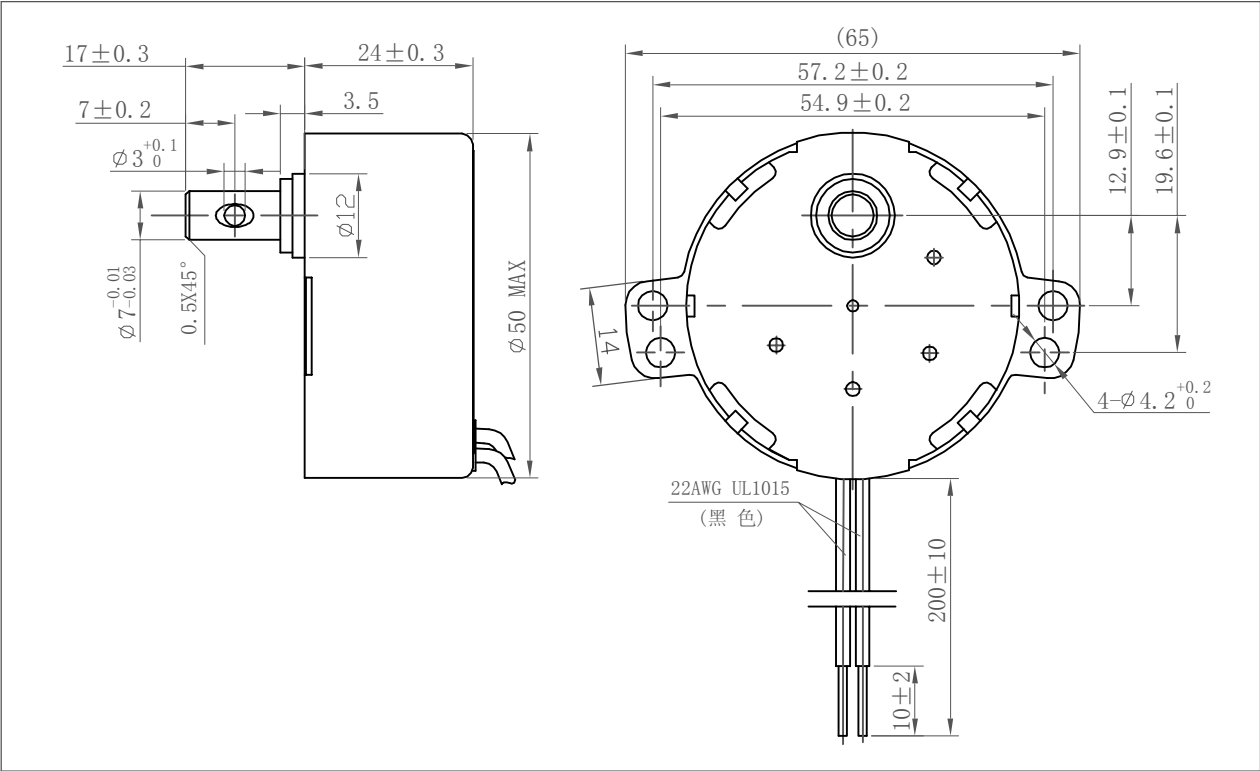



电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaquire Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50E	AC110-120V	50/60	1-100	≤4	≤40	≥3	≤88	≤65	≤40	A	UL
TYC50E	AC220-240V	50/60	1-100	≤4	≤20	≥5	≤176	≤65	≤40	E	3C、VDE CE、CB

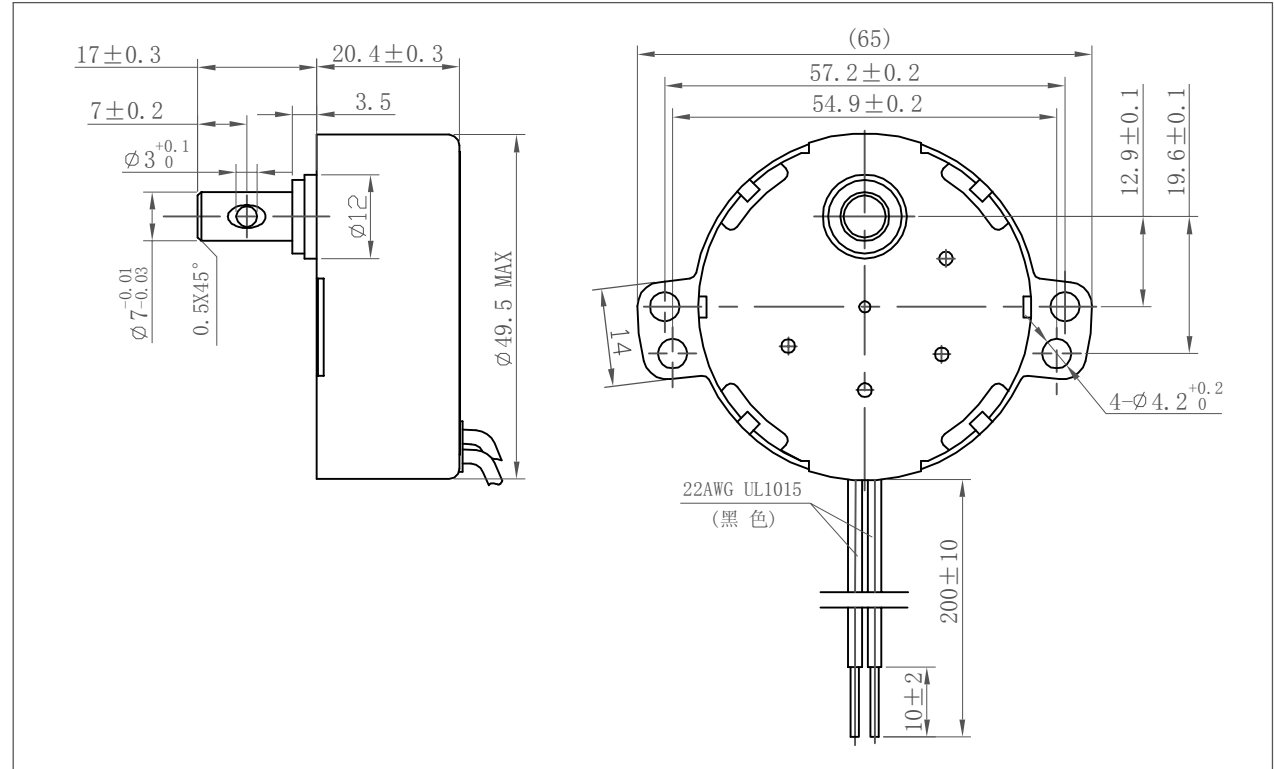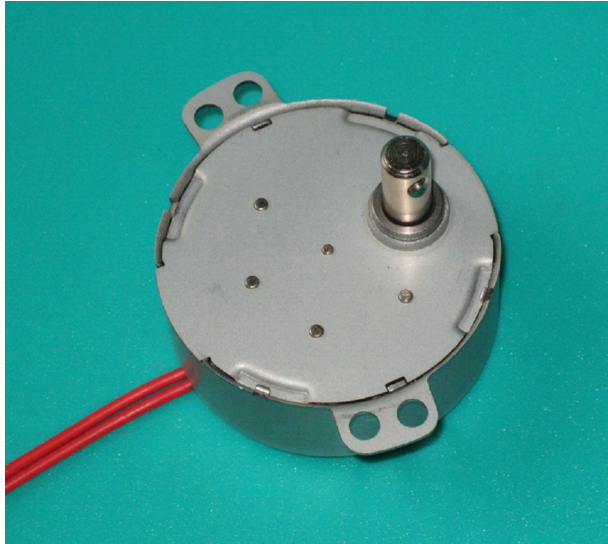



电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaquire Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50C	AC110-120V	50/60	1-100	≤ 4	≤ 40	≥ 3	≤ 88	≤ 65	≤ 40	A	UL
TYC50C	AC220-240V	50/60	1-100	≤ 4	≤ 20	≥ 5	≤ 176	≤ 65	≤ 40	E	3C、VDE CE、CB

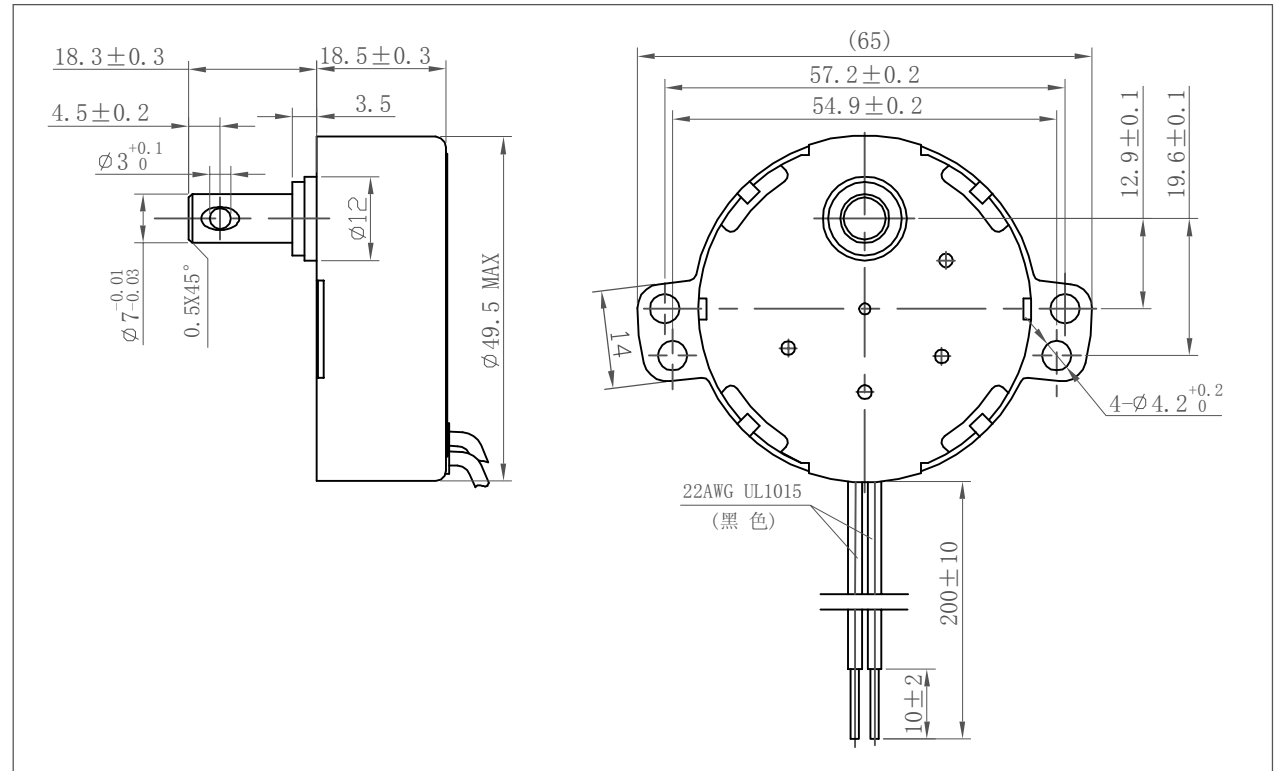

电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaquire Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50B	AC110-120V	50/60	1-100	≤ 4	≤ 40	≥ 3	≤ 88	≤ 65	≤ 40	A	UL
TYC50B	AC220-240V	50/60	1-100	≤ 4	≤ 20	≥ 5	≤ 176	≤ 65	≤ 40	E	3C、VDE CE、CB

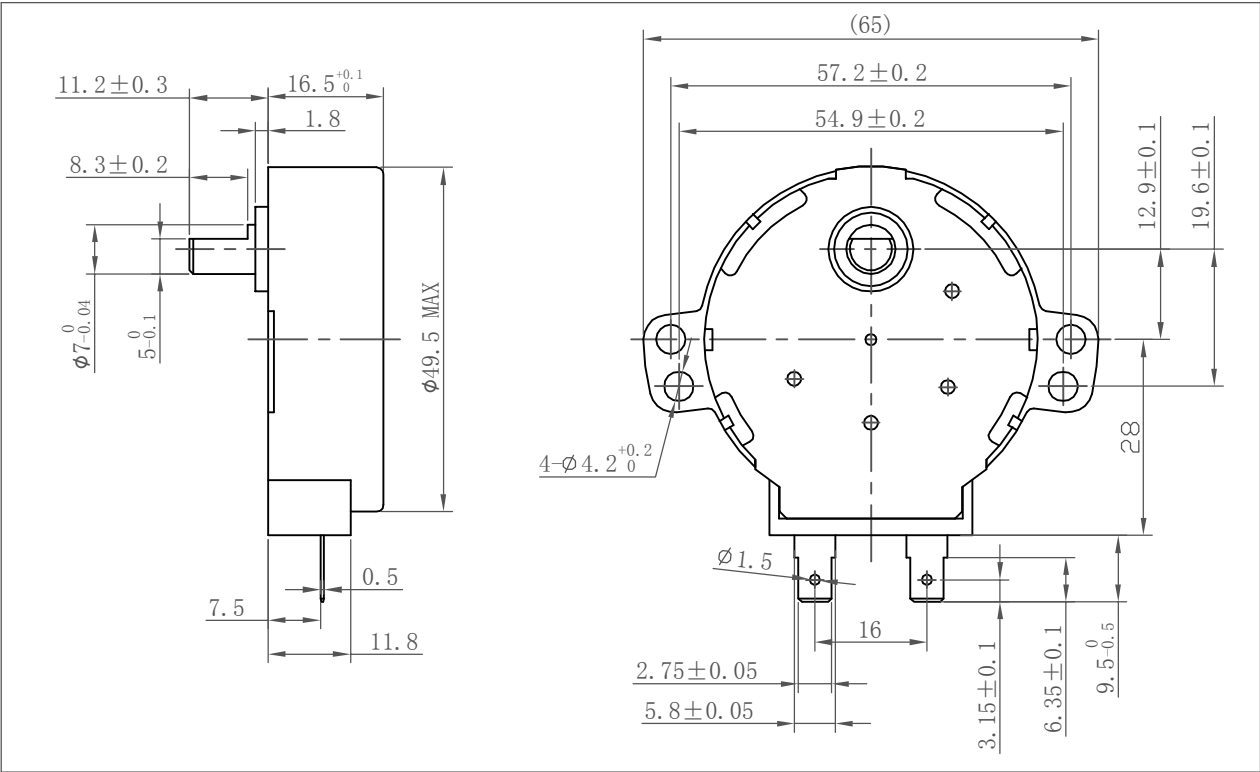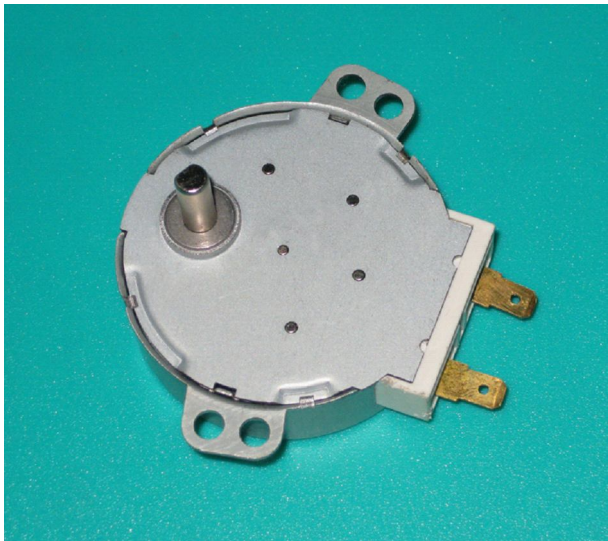

电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	转 速 Speed (r/min)	输入功率 Input Power (W)	输入电流 Input Current (mA)	输出力矩 Output Torque (kgf.cm)	起动电压 Starting Voltage (V)	温升 Temperaure Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class	认证证书 Certification
TYC50A	AC110-120V	50/60	1-100	≤ 4	≤ 40	≥ 3	≤ 88	≤ 65	≤ 40	A	UL
TYC50A	AC220-240V	50/60	1-100	≤ 4	≤ 20	≥ 5	≤ 176	≤ 65	≤ 40	E	3C、VDE CE、CB

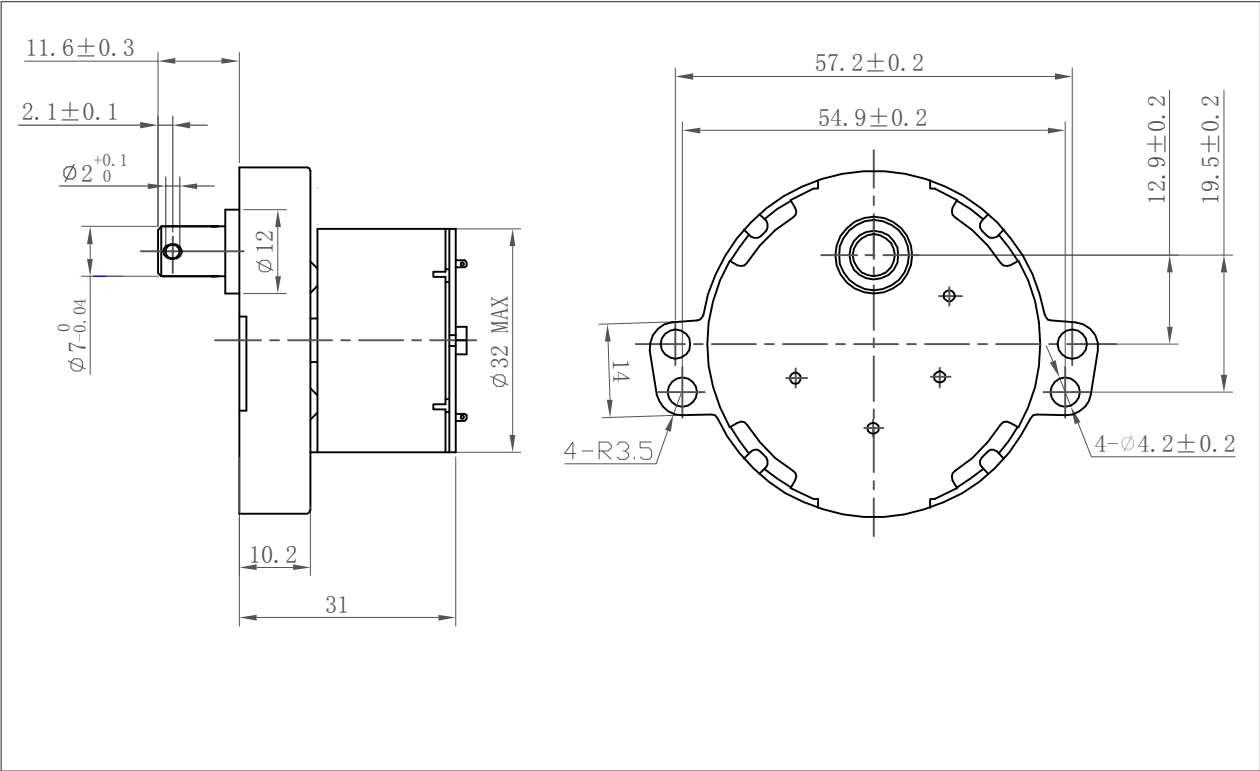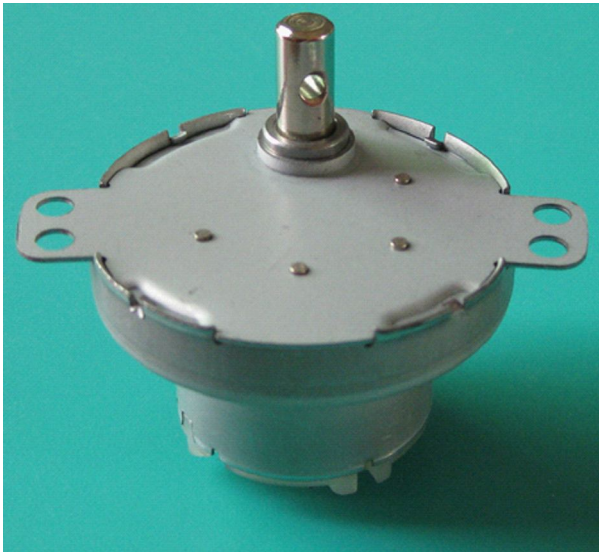

电机型号 modle	额定电压 Rated Voltage (V)	额定频率 Rated Frequency (Hz)	减速比 Reduction Ratio	输入功率 Input Poweer (W)	空载电流 No Load Current (mA)	负载电流 Load Current (mA)	输出力矩 Output Torque (kgf.cm)	温升 Temperaure Rise (K)	噪音 Noise (dB)	绝缘等级 Insulation Class
TYC50D	DC12V	50/60	712.5:1	≤2	≤60	≤200	≥15	≤65	≤40	A
TYC50D	DC9V	50/60	389.2:1	≤2	≤80	≤250	≥8	≤65	≤40	A
TYC50D	DC6V	50/60	304.8:1	≤2	≤80	≤250	≥6	≤65	≤40	A