



A Complete Server Handling Solution

With the SL-350X hand-cranked lift, anyone can safely and single-handedly load, transport, position, and install servers in any data center.

- ✓ Only safety-certified manual data center lift
- ✓ Eliminates risk to equipment and personnel
- ✓ Never requires power or charging
- ✓ One tech per move, every time
- ✓ Micro-leveling tilt adjustment perfectly aligns server with both rails or rack posts





LISTED
MANUALLY-OPERATED
MATERIAL LIFT
SA44294

The ServerLIFT SL-350X Hand-Cranked Data Center Lift is the gold-standard alternative to motorized lifts for handling all manner of rack-mounted IT equipment. While built to withstand everyday use, the SL-350X lift is recommended for data centers with occasional server moves, due to the physical strain of repetitively hand-cranking servers up and down.

- ✓ 350-lb (159 kg) load capacity
- ✓ Operate in narrow aisles as small as 36" (91cm)
- ✓ Server support to over 52U high (9 feet or 2.7 m)
- ✓ Up to 40° of platform angle tilt adjustment
- ✓ Optional 3 or 5-year Extended Service and Warranty contracts



- Weight: 443 lbs [200.94 Kb]
- Shipping Weight: 483lbs [219]
- Zero Turn Radius (can pivot on axis when front casters are unlocked)
- Aisle and "T" Intersection turn limit: 32" [81.28 cm]
- Side Shelf distance: 6" each side - 12" total travel [30.48]
- Minimum Aisle Width: 25" [63cm]
- Shelf upper limit: 8.1' [246.4 cm]
- Shelf lower limit: 5.31" [13.49 cm]
- Maximum load capacity rating: 350 lbs [158.76 kg]

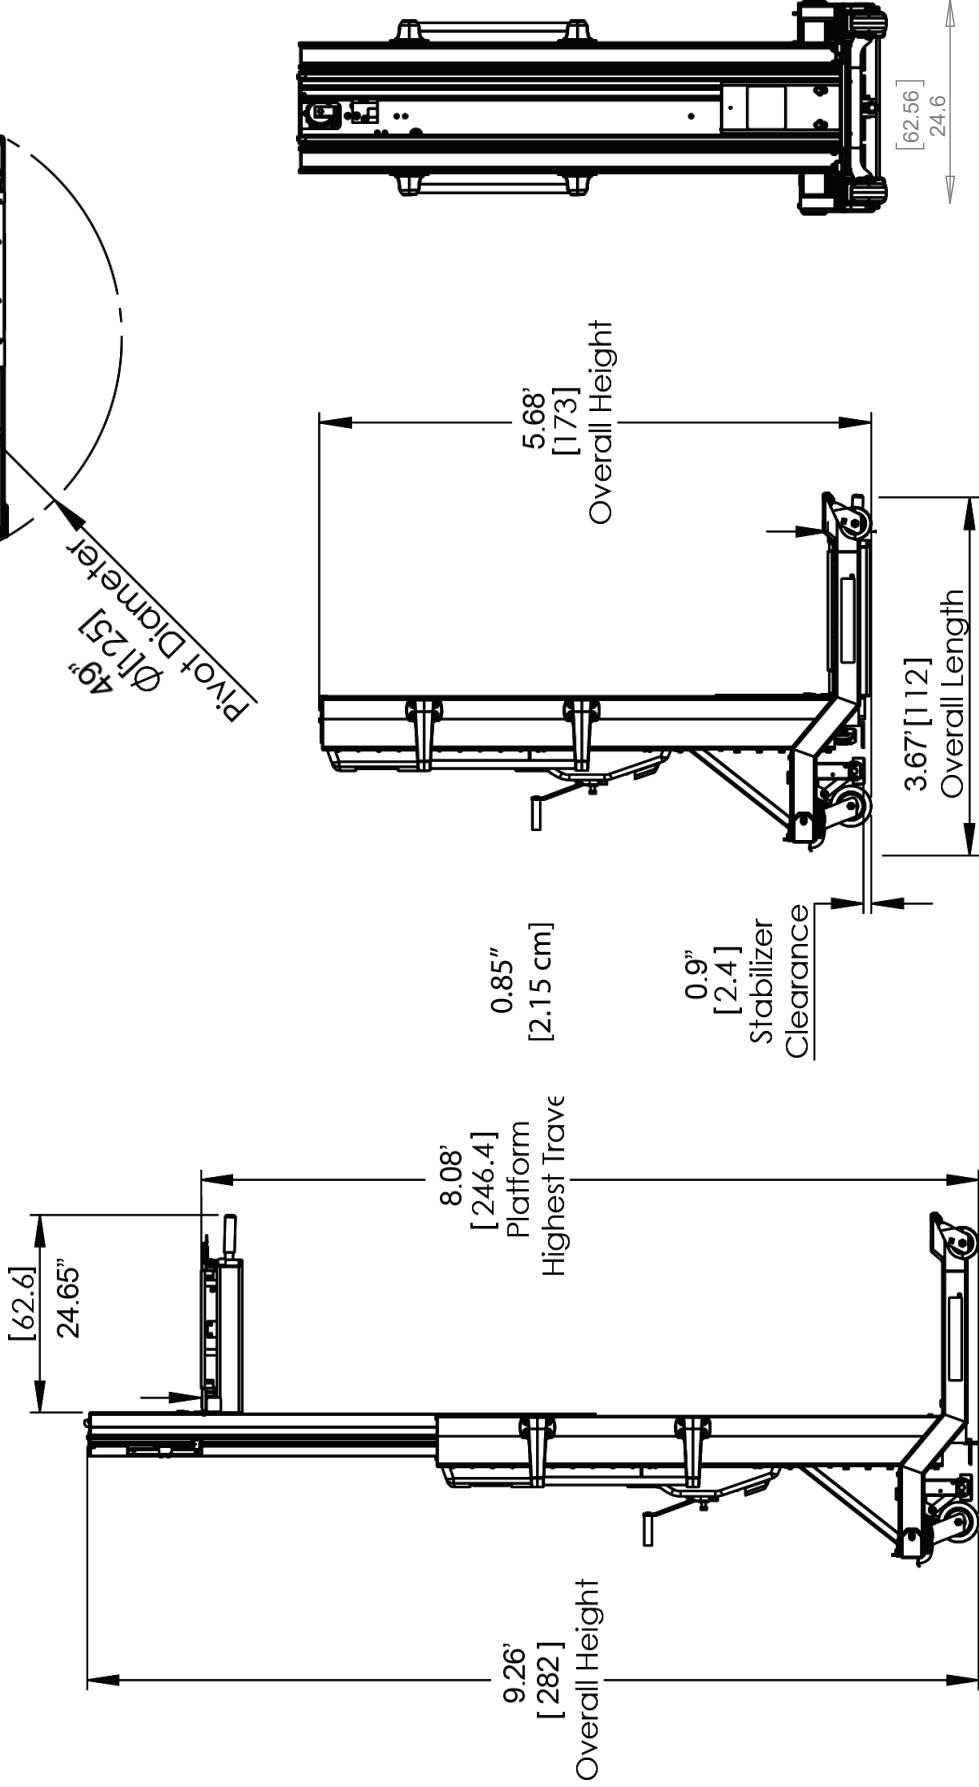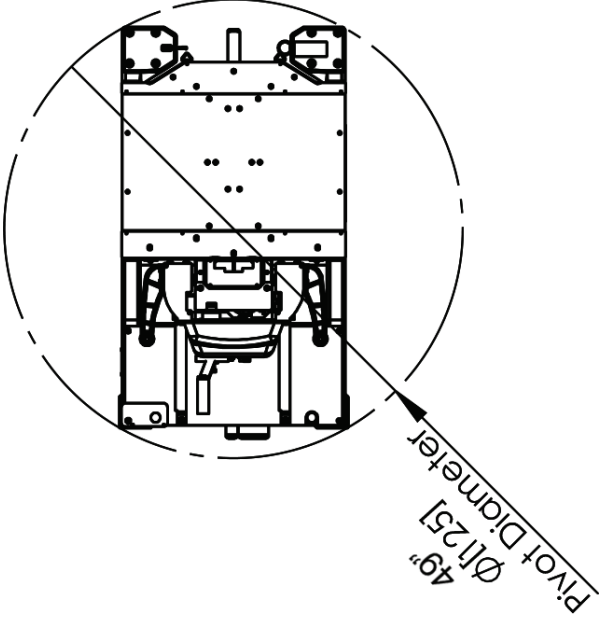

Notes:

PRINT DATE:
1/11/2016
COPYRIGHT 2016
SERVERLIFT CORPORATION

PART NO.
SL-350X®