

IP40




Asso A - Small

Housing: Die-cast aluminium with cooling holes.
Reflector: in die-cast polished aluminium, high efficiency and anti-glare.
Coating: Power-coated with a UV-resistant polyester paint.
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
LED: High-efficiency light sources (CRI 95).
Luminous flux maintenance L80B20: 50.000h.
Power factor >0.9
Photobiological safety class: Exempt group

Download

DXF 2D
- assoasmall.dxf

Montaggi
- ASSO_A-B.pdf

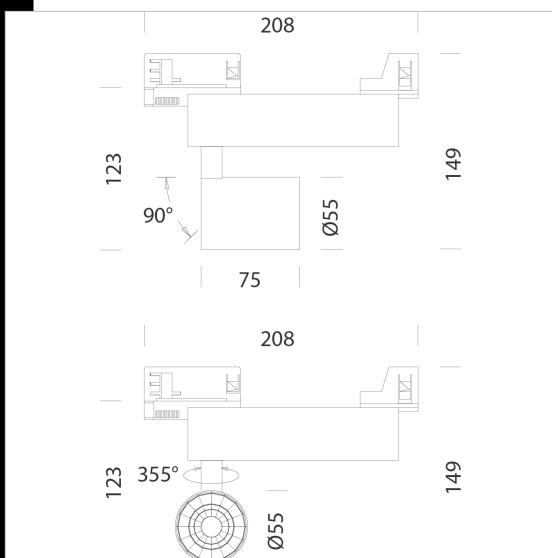

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22043210-00	CLD CELL	0.62	LED COB-1347lm-3000K-18°-CRI>95	14 W	BIANCO
22043210-1241	CLD CELL-D-D	0.99	LED COB-1347lm-3000K-18°-CRI>95	14 W	BIANCO
22043210-68	CLD CELL	0.99	LED COB-1441lm-4000K-18°-CRI>95	14 W	BIANCO
22043210-6841	CLD CELL-D-D	0.99	LED COB-1441lm-4000K-18°-CRI>95	14 W	BIANCO
22043230-00	CLD CELL	0.99	LED COB-1347lm-3000K-18°-CRI>95	13 W	NERO
22043230-1241	CLD CELL-D-D	0.99	LED COB-1347lm-3000K-18°-CRI>95	14 W	NERO
22043230-68	CLD CELL	0.99	LED COB-1441lm-4000K-18°-CRI>95	14 W	NERO
22043230-6841	CLD CELL-D-D	0.99	LED COB-1441lm-4000K-18°-CRI>95	14 W	NERO
22043212-00	CLD CELL	0.99	LED COB-1360lm-3000K-26°-CRI>95	14 W	BIANCO
22043212-1241	CLD CELL-D-D	0.99	LED COB-1360lm-3000K-26°-CRI>95	14 W	BIANCO
22043212-68	CLD CELL	0.99	LED COB-1455lm-4000K-26°-CRI>95	14 W	BIANCO
22043212-6841	CLD CELL-D-D	0.99	LED COB-1455lm-4000K-26°-CRI>95	14 W	BIANCO
22043232-00	CLD CELL	0.99	LED COB-1360lm-3000K-26°-CRI>95	13 W	NERO
22043232-1241	CLD CELL-D-D	0.99	LED COB-1360lm-3000K-26°-CRI>95	14 W	NERO
22043232-68	CLD CELL	0.99	LED COB-1455lm-4000K-26°-CRI>95	14 W	NERO
22043232-6841	CLD CELL-D-D	0.99	LED COB-1455lm-4000K-26°-CRI>95	14 W	NERO
22043214-00	CLD CELL	0.61	LED COB-1297lm-3000K-38°-CRI>95	14 W	BIANCO
22043214-1241	CLD CELL-D-D	0.99	LED COB-1297lm-3000K-38°-CRI>95	14 W	BIANCO
22043214-68	CLD CELL	0.61	LED COB-1388lm-4000K-38°-CRI>95	14 W	BIANCO
22043214-6841	CLD CELL-D-D	0.99	LED COB-1388lm-4000K-38°-CRI>95	14 W	BIANCO
22043234-00	CLD CELL	0.99	LED COB-1297lm-3000K-38°-CRI>95	13 W	NERO
22043234-1241	CLD CELL-D-D	0.99	LED COB-1297lm-3000K-38°-CRI>95	14 W	NERO
22043234-68	CLD CELL	0.99	LED COB-1388lm-4000K-38°-CRI>95	14 W	NERO
22043234-6841	CLD CELL-D-D	0.99	LED COB-1388lm-4000K-38°-CRI>95	14 W	NERO
22043216-00	CLD CELL	0.61	LED COB-1308lm-3000K-63°-CRI>95	14 W	BIANCO
22043216-1241	CLD CELL-D-D	0.99	LED COB-1308lm-3000K-63°-CRI>95	14 W	BIANCO
22043216-68	CLD CELL	0.99	LED COB-1400lm-4000K-63°-CRI>95	14 W	BIANCO
22043216-6841	CLD CELL-D-D	0.99	LED COB-1400lm-4000K-63°-CRI>95	14 W	BIANCO
22043236-00	CLD CELL	0.99	LED COB-1308lm-3000K-63°-CRI>95	15 W	NERO
22043236-1241	CLD CELL-D-D	0.99	LED COB-1308lm-3000K-63°-CRI>95	14 W	NERO
22043236-68	CLD CELL	0.99	LED COB-1400lm-4000K-63°-CRI>95	14 W	NERO
22043236-6841	CLD CELL-D-D	0.99	LED COB-1400lm-4000K-63°-CRI>95	14 W	NERO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated