


OUTLINE 3-PHASE INDUCTION MOTOR	TOTALLY ENCLOSED FAN COOLED,SQUIRREL CAGE ROTOR (WMP-90) (INDOOR)	FILE NO: A181203005
		CUSTOMER: T E G PO. NO: ORDER NO:

OUTPUT	POLE	SYN. SPEED R.P.M	VOLT. V	FREQ Hz	INSUL.	TIME RATING	MODEL	FRAME NO.
10HP	2P	3000	220/380	50	F	S1	BBFC	132S

**** FOR DIRECT COUPLING**

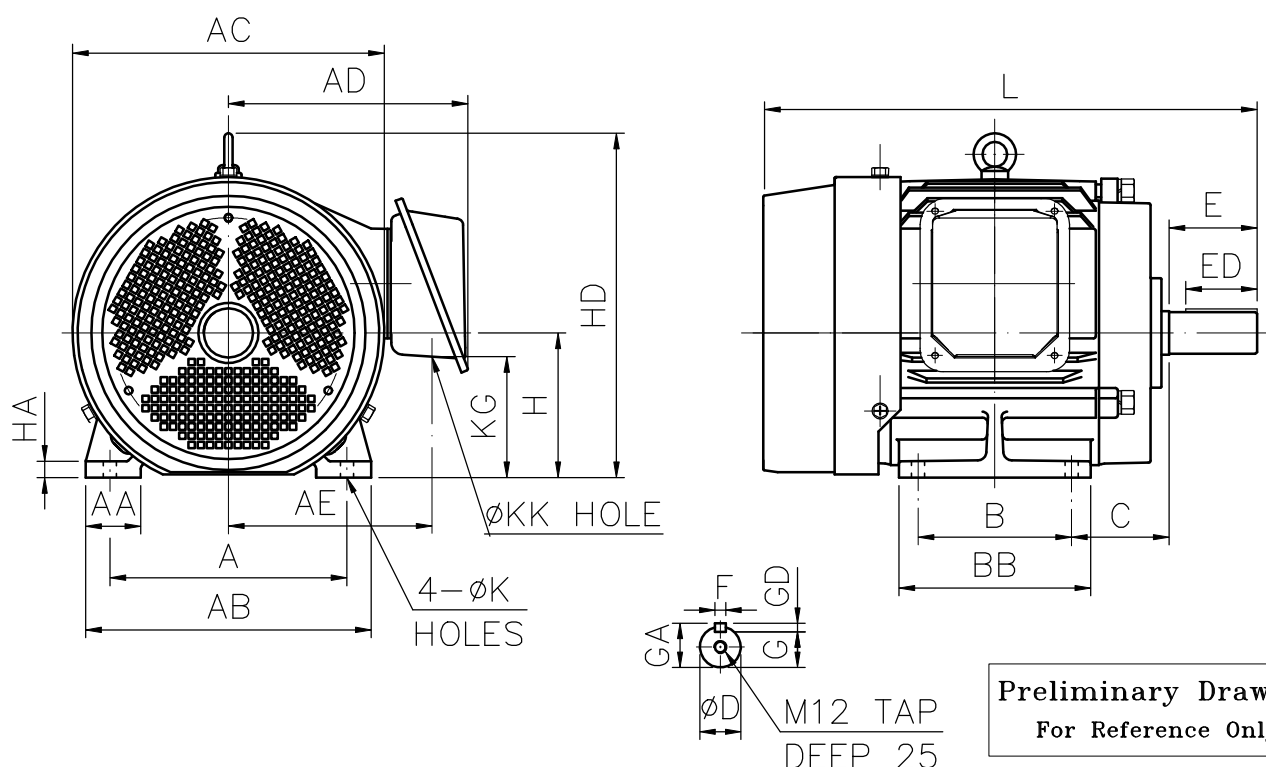

A	B	C	H	ØK	L	AA	AB	AC	AD	AE	KG	BB	HA
216	140	89	132	12	450	50	260	286	219	185	110	175	15

HD	ØKK	SHAFT END							BEARING NO.		APPROX WEIGHT
		ØD	E	ED	F	G	GD	GA	D.E	O.D.E	
316	35	38	80	65	10	33	8	41	6308zz	6208zz	65kg

NOTE:1.TOLERANCE OF SHAFT END DIAMETER D: k6 (+0.018 , +0.002)

2.TOLERANCE OF SHAFT CENTER HEIGHT H: +0 , -0.5



CERTIFIED BY :		DATE :	
DESIGNED	T.Y.Ku Dec.17.2018	DWG. NO:	AS-820244
CHECKED	L.J.Lee Dec.17.2018	3RD ANGLE PROJECTION	
APPROVED	L.J.Lee Dec.17.2018	DIMENSIONS IN mm	