

Pressure watertight luminaire



- Save down to 20 m water depth
- Removable gear tray
- Wash resistant

Application

For decks and deck rails.

Design

According to rules of relevant classification societies, additional VDE and IEC.

Gear tray

Zinc coated steel sheet.

Finish

Powder coated white RAL9016 and enamelled up to 70 - 80 µm thickness.

Diffuser

Clear polycarbonate cover tube, 4 mm thickness, polycarbonate end caps.

Electric

With magnetic ballast, low or high power factor, as standard; electronic ballast available. Heat resistant flexible wiring up to 105°C, removable gear tray.

Lamp base

G13

Light source

Designed for one T8 (T26) fluorescent lamp 18W, 36W (not included).

Mounting

Fixing by means of 2 clamps (not included), have to be ordered separately, see spare parts and accessories.

Cable entry

Polyamide gland
M20 x 1.5 (cable Ø6-12 mm)
M25 x 1.5 (cable Ø13-18 mm)

Termination

Plug connection 3-pole/2.5 mm².







Remarks

Through wiring on request.



Product	Part-No. 230/50 l.p.f.~	Part-No. 230/50 h.p.f.c.~	Part-No. 230/60 l.p.f.~	Part-No. 230/60 h.p.f.c.~	Weight kg	Lamp Code	Lampe Base	Light Distr.
0673 1 x 18 W M20	673005000	673006000	673007000	673008000	3.1	T26	G13	A
0673 1 x 18 W M25	673705000	673706000	673707000	673708000	3.1	T26	G13	A
0673 1 x 36 W M20	673305000	673306000	673307000	673308000	3.9	T26	G13	B
0673 1 x 36 W M25	673805000	673806000	673807000	673808000	3.9	T26	G13	B
Accessories	Part-No.							
Clamp stainless steel heavy duty	8105400900							
Clamp stainless steel	8177300100							
Clamp polyamide	8027300900							

Spare Parts

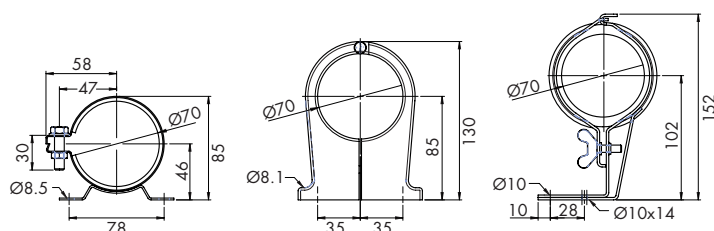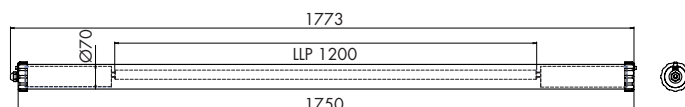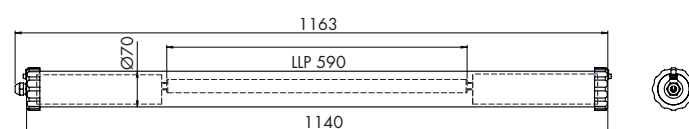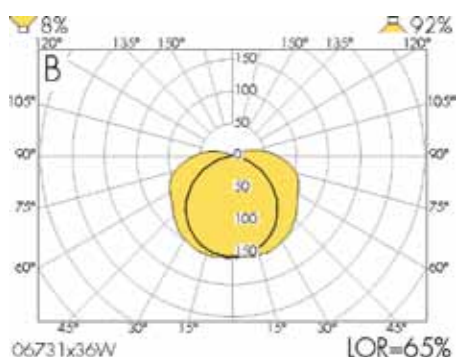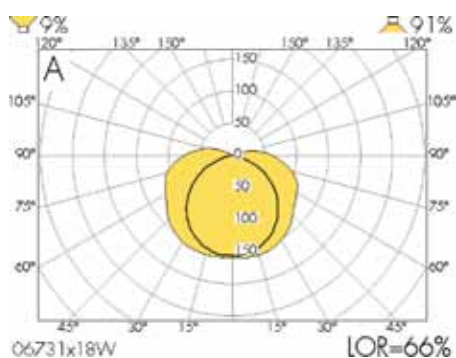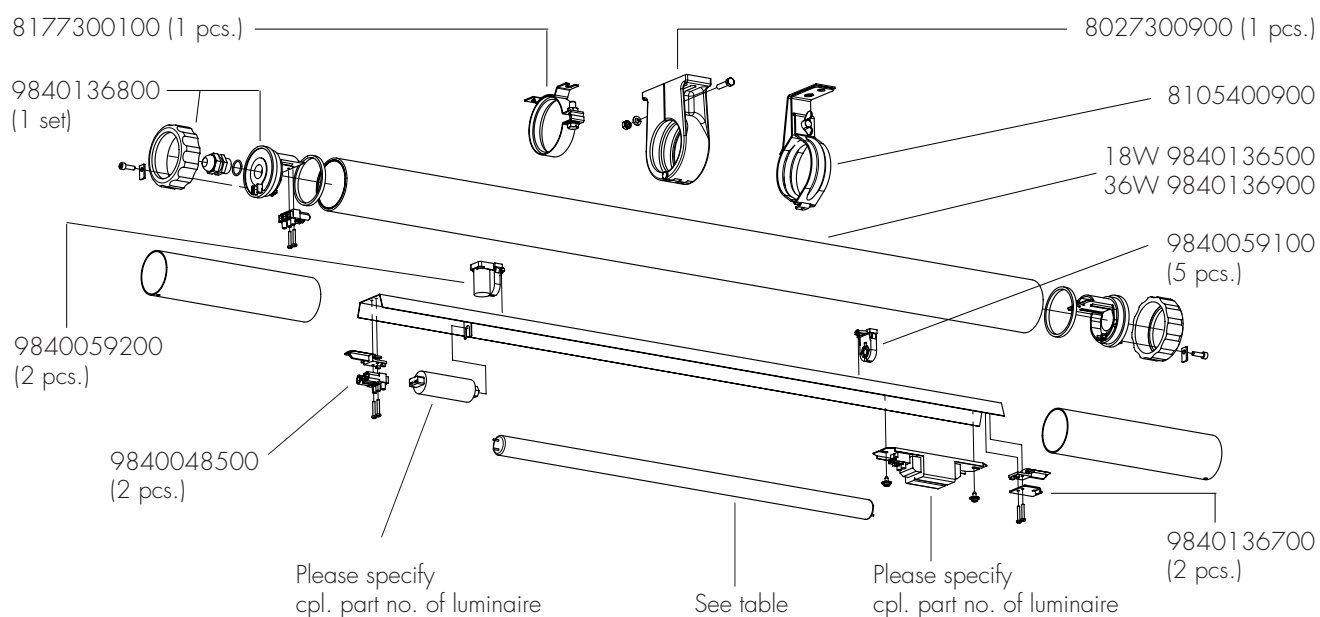

Measurements are in mm