

3006200044

## VSP-512

Intrinsically Safe Substation



### DESCRIPTION


- Intrinsically safe substation
- Suitable for mounting in hazardous areas
- Ex II 1G (Zone 0)
- 12 extensions selector switch and a call button
- Used together with buffer unit mounted in safe area
- Delivered for wall mounting

# SPECIFICATIONS

## SPECIFICATIONS

Dimensions (WxHxD)	220 x 208 x 170 mm (with handset)
Mounting	Bulkhead
Weight	1,8 kg
Housing	Glassfibre reinforced polyester box
Color	Black
IP- rating	IP-44
Cable entry	M20 x 1,5
Connections	Screw terminals
Protection mode	Ex II 1 G EEx ia IIC T6
Certificate	Nemko 05ATEX1059

## TECHNICAL DIMENSIONS

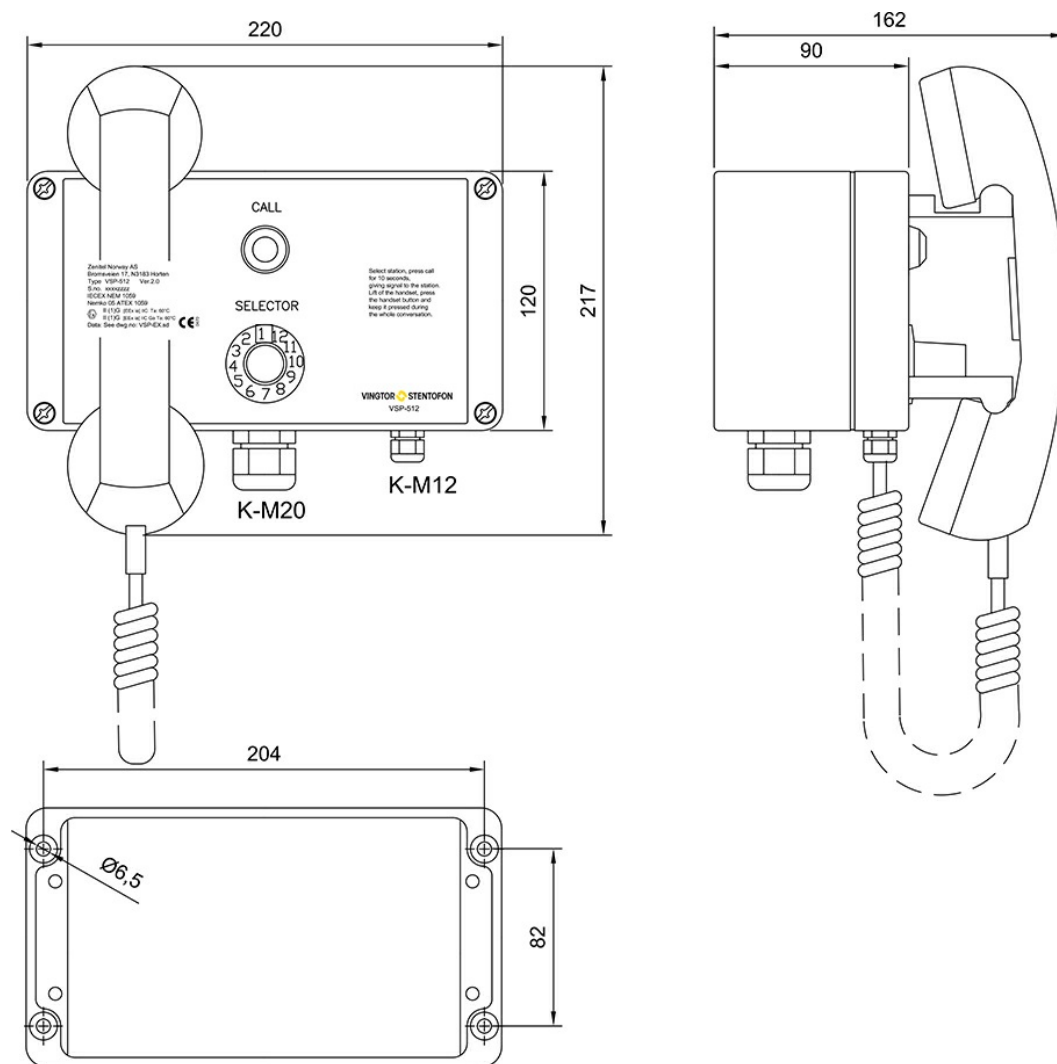

<b>Ex</b> ATEX Approved product
Certification body <b>Nemko</b>
Certificate no. <b>Nemko: 05 ATEX 1059</b>
Protection system <b>II (1)G [EEx ia] IIC Ta: 60°C</b>

## ACCESSORIES



**VSP-512-AKHS-10**

Item Number: 2330040025



**VSP-512-AKHS-20**

Item Number: 2330040029