





ZONE	REV.	DESCRIPTION	DATE	SIGNATURE
①	1	Housing length and thread changed	19.02.2017	Inna
②	2	Thread changed from PG-16 to M22x1	11.02.2018	Inna
③	3	Material changed to STS316	11.03.2018	Inna
④	4	Cable changed to DB0033202	03.06.2018	Inna



Scale 1:1

PIEZO SWITCH

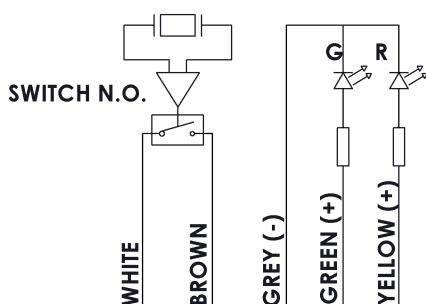

SPECIFICATIONS:

SWITCHING VOLTAGE: 1 - 24V AC/DC

SWITCHING CURRENT: 1A max

SWITCH RESISTANCE "ON": <20 Ω

SWITCH RESISTANCE "OFF": >5 M Ω

ACTION FORCE: 3-5 N

MAKE IMPULSE TIME: 125-300 mSEC

OPERATING TEMP: -20 °C TO +70 °C

STORAGE TEMP: -40 °C TO +85 °C

Separated LEDs: GREEN, RED

LED Operating Voltage : 24V DC max

Each LED current consumption:


GREEN: max 25 mA

RED: max 15 mA

④ CONNECTOR: CABLE DB0033202, LENGTH 3000 $\pm$ 20mm

FINISH:

NATURAL PASSIVATION

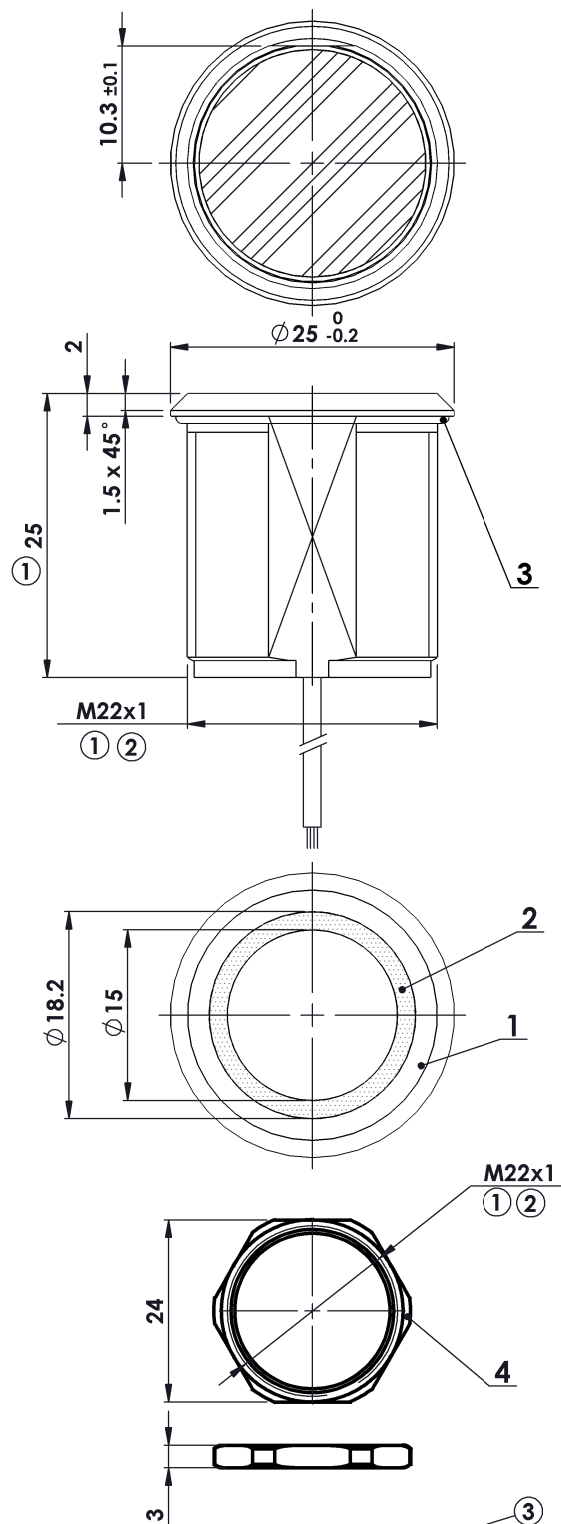

ITEM NO.	QTY.	DESCRIPTION	PART NUMBER
1	1	HOUSING, STAINLESS STEEL 316	81018783
2	1	DELFIN D19mm	81080253
3	1	O-RING, NBR (Acrylonitrile-Butadiene Rubber), 22x1.5	81500015
4	1	NUT, BRASS (Ni COATED), M22X1	07099113
⌀	A4	TOLERANCE $\pm$ 0.1	13101352-01
Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Approved by: Roi Ben Shitrit	Designed by: Inna Hatkevich	Filename 13700086_908-883	Drawing_n 908-883
		Scale 1.5:1	Draw Date 24.01.2017
		CSBR11ABC4242N, STS, Led G/R24V, 1A, cable 3m	
		Cat num: 13700086	Edition 1 Sheet 1/1



Baran House 8 Omarim St.
Omer Industrial area 84965 Israel
Tel. 972 (0) 73 2511020
Fax. 972 (0) 73 2511021

CSBR11ABC4242N, STS, Led G/R24V, 1A, cable 3m
Cat num: 13700086
Edition 1 Sheet 1/1