

ELSTER

REPROX

Bi 3-ISM-Y1

KEMA 03 ATEX 1188X
EEx ia IIC T6



II 1 G

DIN 19234
U_i

C_i = 50

2.3 Accessories

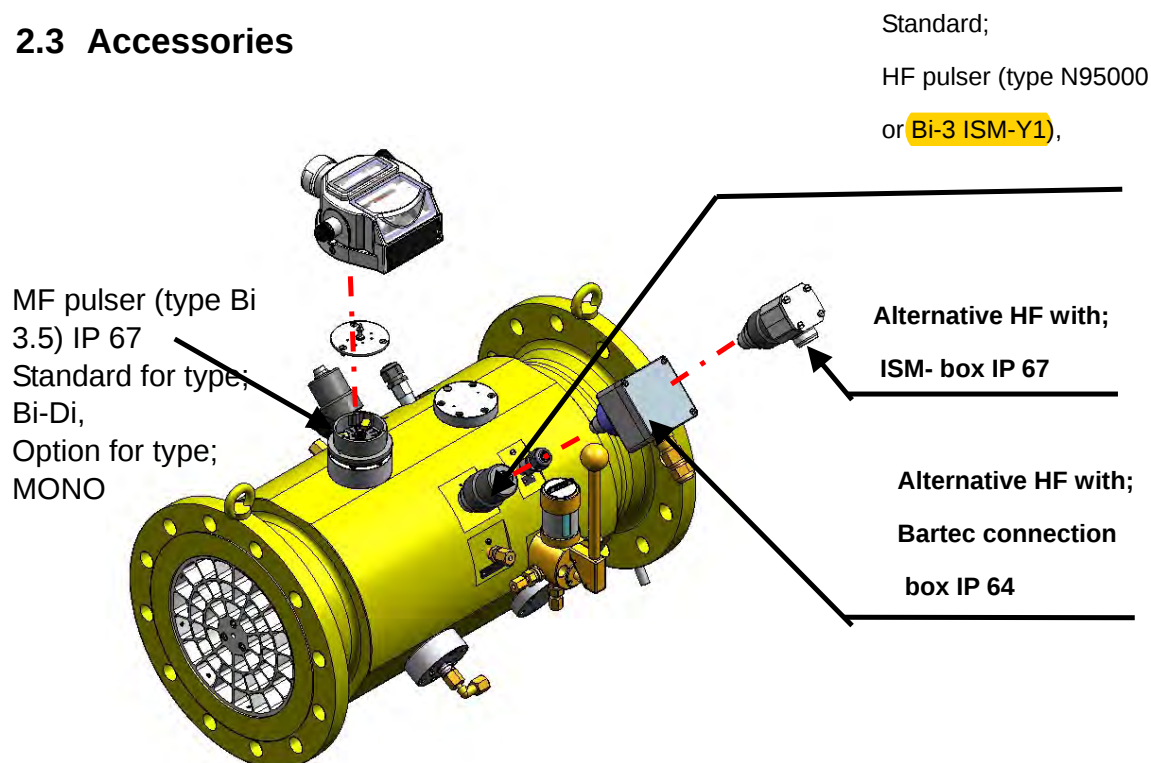


Fig. 4 Meter body with optional different MF and HF frequency pulsers

The MF pulser will give the opportunity to detect the flow direction in the Bi-Di type turbine



These optional proximity sensor frequency pulsers are detecting pulses from either the blades of the rotor or from a reference disk underneath the index, in the turbine gas meter.