

# v30 CO<sub>2</sub> Laser

Industry leading laser with 30 Watts of average power for marking, engraving, and ablating applications

High performance CO<sub>2</sub> laser engineered for seamless integration into high-speed industrial equipment

- Advanced waveguide design guarantees exceptionally circular beam quality in both near- and far-fields
- 30 Watts continuous power ensures high throughput
- Optimized for your application: available in multiple wavelengths and air, fan, or water cooled options
- Common beam exits with Synrad vi- and ti-Series lasers enables an easy upgrade path as application of throughput demands increase
- Small footprint and light weight, ideal for small cutting or marking systems
- On-board tickle generator, industry standard 5-24 VDC I/O ports and remote control status via a 15-pin connector makes integration quick and straight-forward



## The Marking & Coding Industry Standard

An industry proven performer for more than 15 years, OEMs and system integrators continue to use the v30 as their standard 30 Watt CO<sub>2</sub> laser for their marking and engraving systems. Reliable year after year operation, consistent high quality beam, compact size, and 3-point mounting system make the v30 the perfect fit for marking and engraving systems.



### Specifications

Output Specifications			
Wavelength	9.3 μm	10.2 μm	10.6 μm
Output Power <sup>1</sup>	>20 W	>25 W	>30 W
Power Stability (cold start) <sup>2</sup>	±7%	±5%	
Power Stability (typical, after 3 min.)	±5%	±3%	
Beam Quality (M <sup>2</sup> )	<1.2		
Beam Diameter <sup>3</sup>	2.5 mm ± 0.5 mm		
Divergence (full angle)	<7.0 mrad		
Ellipticity	<1.2		
Polarization	Linear (Horizontal)		
Rise Time	<100 μs		
Operating Frequency	0 - 100 kHz		
Power Supply			
DC Input Voltage	30 VDC		
Maximum Current	15 A (air/water), 16 A (fan)		
Cooling			
Maximum Heat Load	450 W		
Coolant Temperature	<40° C (air), 18 - 22° C (water)		
Minimum Flow Rate	140 CFM, 2 required (air) 1.0 GPM, <60 PSI (water)		
Environmental			
Operating Ambient Temperature	15 - 40° C		
Maximum Humidity	95%, non-condensing		
Physical	OEM Air	Fan	Water
Dimensions (L) mm (inches)	427 (16.8)	427 (16.8)	433 (17.1)
Dimensions (W) mm (inches)	116 (4.6)	119 (4.7)	116 (4.6)
Dimensions (H) mm (inches)	146 (5.8)	160 (6.3)	148 (5.8)
Weight kg (lbs.)	8.2 (18)	9.7 (21)	8.7 (19)

1 - Power level guaranteed for 1 year from date of shipment, regardless of operating hours, within recommended coolant flow rate and temperature range.

2 - Measured from cold start as  $\pm(P_{max} - P_{min}) / (P_{max} + P_{min})$

3 - Measured 1/e<sup>2</sup> diameter at laser output.



Invisible Laser Radiation  
Avoid eye or skin exposure to direct or scattered radiation  
Class 4 Laser Product.

# SYNRAD


A Novanta Company

# v30 CO<sub>2</sub> Laser


## Technical Illustrations dimensions are in mm (inches)

Outline and mounting drawings for fan-cooled and water-cooled models are available on the Synrad website at:  
<https://www.synrad.com/products/lasers/v-series>.

### Air Cooled

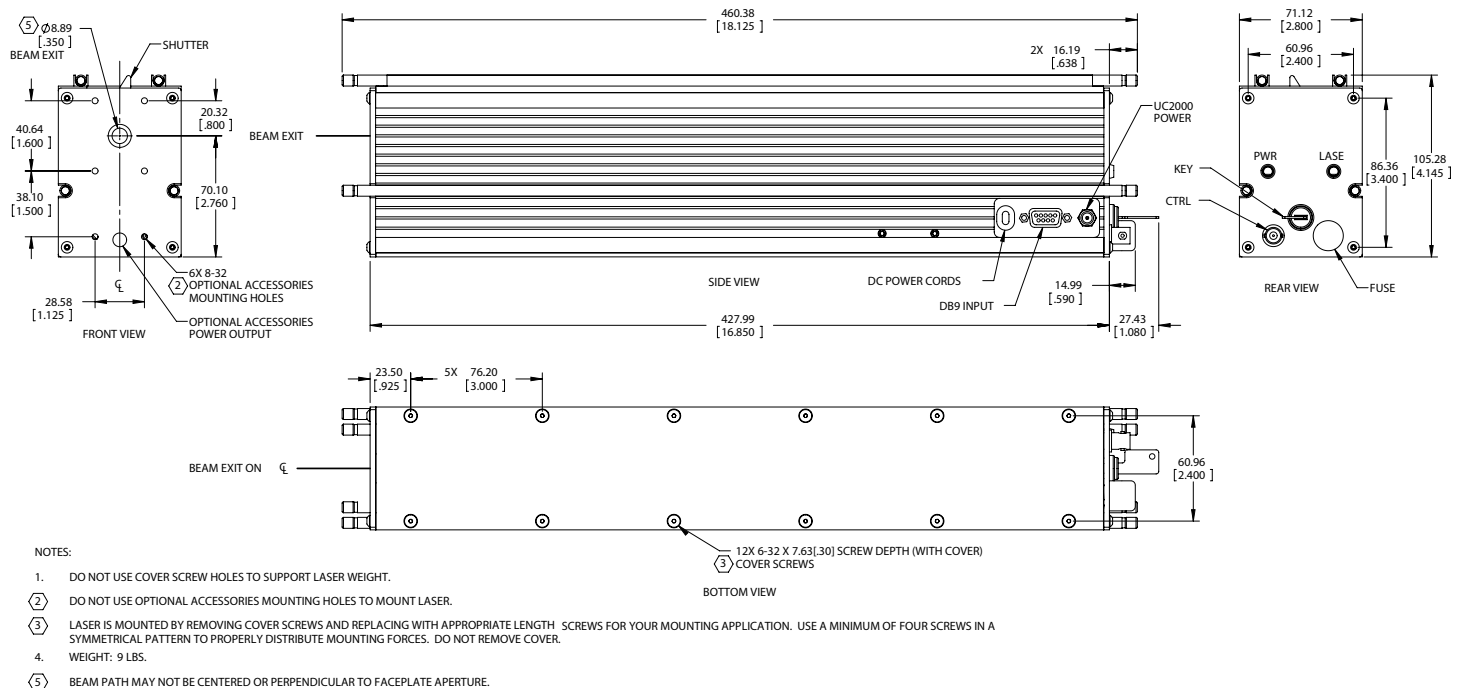

### Recommended Applications

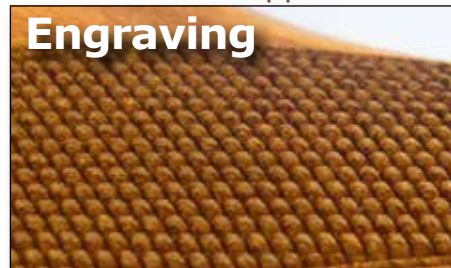

100 kHz pulse frequency for accurate raster image scanning at high speeds.



Powerful, accurate laser system that can be used on a wide variety of materials.



Small footprint, light weight, and high resolution imagery engineered to fit a wide variety of automated manufacturing systems.

### Contact Us

[synrad.com](http://synrad.com)

#### Americas & Asia Pacific

Synrad  
 4600 Campus Place  
 Mukilteo, WA 98275  
 P (425) 349.3500  
 F (425) 349.3667  
[synrad@synrad.com](mailto:synrad@synrad.com)

#### Europe, Middle East, Africa

Novanta Europe GmbH  
 Division Synrad Europe  
 Parkring 57-59  
 D-85748, Garching, Germany  
 P +49 (0)89 31707 0  
 F +49 (0)89 31707 222  
[sales-europe@synrad.com](mailto:sales-europe@synrad.com)

#### China

Synrad China Sales and Service Center  
 Unit C, 5/F, Ting Wei Industrial Park  
 Liufang Road, Baoan District, Shenzhen  
 Guangdong, PRC 518133  
 P +86 (755) 8280 5395  
[sales-china@synrad.com](mailto:sales-china@synrad.com)

#### Japan

Novanta Japan Co., Ltd.  
 4666 Ikebe-cho Tsuzuki-ku  
 Yokohama Kanagawa 224-0053 Japan  
 P +81 3 5753 2462  
 F +81 3 5753 2467  
[sales-japan@synrad.com](mailto:sales-japan@synrad.com)