

CAPP[®]



Masters of precision

Symphony of Precise Measurements

The intricacy of the science world is reminiscent of a music performance. As in music, a masterpiece performance calls for accuracy in each note played - in science, the precision of measurements used in research can lead either to a great discovery or a fruitless quest.

CAPP recognized this at the earliest stages in its development and committed itself to only one task - designing pipettes that will be the most precise instruments in the industry without compromise.

By introducing adjustable volume pipettes that can also be used with removable fixed volume knobs, we created a pinnacle of accuracy that is widely used in many reference laboratories worldwide. There is no longer a reason to use multiple fixed volume pipettes as a frame of reference. Now you can have one **CAPP** pipette with separate specific fixed volume controllers for use in most critical applications.

The construction of each **CAPP** pipette has a shared story; a tale of artistry of the hands which gave it shape, of careful material selection, of dedicated care and patience. Each pipette is individually produced and tested by a highly skilled master. It is the passion of these masters of precision at **CAPP** who give each product that very special characteristic: a soul.

As we are looking into the future we are focusing on delivering a full line of liquid measurement instruments of the same robust design and highest standard of precision that made **CAPP** pipettes the instrument of choice in many critical laboratories worldwide.

We invite you to experience the symphony of precise measurements as powerful as Beethoven's Ninth Symphony and as enjoyable as Mozart's Minuets.

We challenge you to bring confidence to your measurements. Become a conductor in **CAPP's** Orchestra of Virtuosos. Experience and express sound results in every drop.



Index

CAPPBravo		4
ecopipette		6
CAPPAero 96		8
CAPPAero 384 & Plates		10
CAPPTrio		12
Microbiology		13
Accessories		14

CAPPMaestro		16
CAPPTronic		17
CAPPTempo		18
CAPPController		19
CAPPForte		20
CAPPRhythm		21
CAPPR10		22

PIPETTING

Pipette Tips		23
Retips		34
Serological Pipettes		36
Centrifuge Tubes		37

Cryo Tubes		38
Cryo Boxes		39
Microcentrifuge Tubes		40
PCR Tubes & Plates		41

CONSUMABLES

CAPPRondo Benchtop Equipment		42
CAPPRondo Mini Vortex Mixer		43
CAPPRondo Vortex Mixer		44
CAPPRondo Microcentrifuge		45
CAPPRondo Mini Centrifuge		46
CAPPRondo Universal Centrifuge		47
CAPPRondo Refrigerated Centrifuge		49
CAPPRondo Clinical Centrifuge		51
CAPPRondo 3D Shaker		53

CAPPRondo Platform Shaker		54
CAPPRondo Magnetic Stirrer		55
CAPPRondo Magnetic Hotplate Stirrer		56
CAPPRondo Hotplate Stirrer		57
CAPPRondo Tube Roller		58
CAPPRondo Tube Rotator		59
CAPPRondo Single Plate Shaker		60
CAPPRondo 4-place Plate Shaker		61
CAPPWash		62

BENCHTOP

CAPP *Bravo*

SINGLE CHANNEL PIPETTES

Manual pipetting has never been easier! **CAPP** has combined lightweight ergonomic design with the latest innovations in manual liquid handling to create **CAPP *Bravo***, the most user friendly manual pipette on the market today.

CAPP *Bravo* is constructed of the highest quality autoclavable materials and features feather light plunger and ejection forces. There is a built-in oversized indicator for easy volume monitoring and precise adjustment. With **CAPP *Bravo*** all of these features are packaged in a modern, streamlined, world-renowned Danish design.

Experience **CAPP**'s symphony of precise measurements and see for yourself why it is called Bravo!

Safety:

- Fully Autoclavable
- Positive indicator lock

Ergonomics:

- Ergonomically constructed hook for comfortable handling
- Smooth tip mounting and ejection

Controls:

- Oversized indicator
- Reduced force feather touch plunger and ejector

Unique Features:

- Metal shaft with double O-rings for ultra micro sizes
- Ultra lightweight construction



Ordering Information



CAPP *Bravo* Starter Packs

Cat. No.	Description
SK-03-BB	Three pipettes free of choice, C-05 stand, 3 racks of tips and 1 timer

Pipette Stands

Cat. No.	Description
C-05	Pipette stand for up to 5 pipettes

CAPP *Bravo* Variable Volume

Cat. No.	Description	Inaccuracy %	Imprecision %	Colour
B02-1	CAPP pipette, variable vol. 0.1-2 μ L, Bravo	12.00 / 2.00	6.00 / 1.00	●
B10-1	CAPP pipette, variable vol. 0.5-10 μ L, Bravo	2.50 / 1.00	1.80 / 0.50	○
B20-1	CAPP pipette, variable vol. 2-20 μ L, Bravo	5.00 / 1.00	1.50 / 0.30	●
B50-1	CAPP pipette, variable vol. 5-50 μ L, Bravo	2.00 / 1.00	1.20 / 0.30	●
B100-1	CAPP pipette, variable vol. 10-100 μ L, Bravo	2.50 / 0.70	1.00 / 0.20	●
B200-1	CAPP pipette, variable vol. 20-200 μ L, Bravo	2.50 / 0.60	0.70 / 0.20	●
B1000-1	CAPP pipette, variable vol. 100-1000 μ L, Bravo	2.00 / 0.80	0.60 / 0.20	●
B5000-1	CAPP pipette, variable vol. 1-5mL, Bravo	1.20 / 0.60	0.30 / 0.15	●
B10000-1	CAPP pipette, variable vol. 1-10mL, Bravo	3.00 / 0.60	0.60 / 0.15	●

CAPP *Bravo* Fixed Volume (customized volumes available on request)

Cat. No.	Description	Inaccuracy %	Imprecision %
B01-1F	CAPP pipette, fixed vol. 1 μ L, Bravo	2.50	1.80
B02-1F	CAPP pipette, fixed vol. 2 μ L, Bravo	2.00	1.00
B05-1F	CAPP pipette, fixed vol. 5 μ L, Bravo	1.20	0.80
B10-1F	CAPP pipette, fixed vol. 10 μ L, Bravo	1.00	0.50
B20-1F	CAPP pipette, fixed vol. 20 μ L, Bravo	1.00	0.30
B50-1F	CAPP pipette, fixed vol. 50 μ L, Bravo	1.00	0.30
B100-1F	CAPP pipette, fixed vol. 100 μ L, Bravo	0.70	0.20
B200-1F	CAPP pipette, fixed vol. 200 μ L, Bravo	0.60	0.20
B500-1F	CAPP pipette, fixed vol. 500 μ L, Bravo	0.80	0.15
B1000-1F	CAPP pipette, fixed vol. 1000 μ L, Bravo	0.80	0.20
B5000-1F	CAPP pipette, fixed vol. 5mL, Bravo	0.60	0.15
B10000-1F	CAPP pipette, fixed vol. 10mL, Bravo	0.60	0.15



SINGLE CHANNEL PIPETTES

ecopipette Innovation

The **ecopipette** is packed using recyclable, biodegradable materials and constructed from some of the most renewable durable resources available, to ensure an extended lifetime.

CAPP ecotrade™ program: Return any brand of old pipettes in exchange for discounted new ecopipettes™.

At CAPP, we will ensure an environmentally safe waste discharge of all old pipettes.

Ask your favourite authorized CAPP distributor for more information about our ecotrade™ program.

CAPP **ecopipette™** Unique Advantages:

- Lockable volume controller requiring 50% fewer turns
 - Display is fully visible during hand operations
- Reduced force requirement for aspiration and blow-out
- The only pipette with fixed and variable exchangeable counter mechanism
 - Large pad for ease of tip ejection
- Fully autoclavable pipette body (no disassembly required)
 - Double O-rings for optimal tip seal
- Compatible with all major pipette tip brands
 - Robust design includes metal tip base
- Lowest incidence of breakage resulting from accidental dropping or tips mounting



Ordering Information



ecopipette Starter Packs

Cat. No.	Description
SKE-03-XX	3 pipettes free of choice, stand, 3 racks of tips and a timer

ecopipette Variable Volume Pipettes

Cat. No	Description	Inaccuracy %	Imprecision %	Colour
C02-1S	CAPP pipette, variable vol. 0.2-2 μ L, ecopipette	12.00 / 2.00	6.00 / 1.00	●
C02-1	CAPP pipette, variable vol. 0.2-2 μ L, ecopipette (length as C10-1)	12.00 / 2.00	6.00 / 1.00	●
C10-1	CAPP pipette, variable vol. 0.5-10 μ L, ecopipette	2.50 / 1.00	1.80 / 0.50	○
C20-1	CAPP pipette, variable vol. 2-20 μ L, ecopipette	5.00 / 1.00	1.50 / 0.30	●
C50-1	CAPP pipette, variable vol. 5-50 μ L, ecopipette	2.00 / 1.00	1.20 / 0.30	●
C100-1	CAPP pipette, variable vol. 10-100 μ L, ecopipette	2.50 / 0.70	1.00 / 0.20	●
C200-1	CAPP pipette, variable vol. 20-200 μ L, ecopipette	2.50 / 0.60	0.70 / 0.20	●
C1000-1	CAPP pipette, variable vol. 100-1000 μ L, ecopipette	2.00 / 0.80	0.60 / 0.20	●
C1000-1M	CAPP pipette, variable vol. 100-1000 μ l with 2 μ L increment, ecopipette	2.00 / 0.80	0.60 / 0.20	●
C5000-1	CAPP pipette, variable vol. 1-5mL, ecopipette	1.20 / 0.60	0.30 / 0.15	●
C5000-1M	CAPP pipette, variable vol. 1-5 mL with 10 μ L increment, ecopipette	1.20 / 0.60	0.30 / 0.15	●
C10000-1	CAPP pipette, variable vol. 1-10mL, ecopipette	3.00 / 0.60	0.60 / 0.15	●

ecopipette Fixed Volume Pipettes

Cat. No.	Description	Inaccuracy %	Imprecision %
C02-1S-001	CAPP pipette, fixed vol. 1 μ L, ecopipette	2.50	1.80
C10-1-005	CAPP pipette, fixed vol. 5 μ L, ecopipette	1.20	0.80
C10-1-010	CAPP pipette, fixed vol. 10 μ L, ecopipette	1.00	0.50
C50-1-020	CAPP pipette, fixed vol. 20 μ L, ecopipette	1.00	0.30
C50-1-025	CAPP pipette, fixed vol. 25 μ L, ecopipette	0.80	0.35
C100-1-030	CAPP pipette, fixed vol. 30 μ L, ecopipette	1.16	0.40
C100-1-050	CAPP pipette, fixed vol. 50 μ L, ecopipette	1.00	0.30
C200-1-100	CAPP pipette, fixed vol. 100 μ L, ecopipette	0.70	0.20
C200-1-200	CAPP pipette, fixed vol. 200 μ L, ecopipette	0.60	0.20
C1000-1-500	CAPP pipette, fixed vol. 500 μ L, ecopipette	0.80	0.15
C1000-1-1000	CAPP pipette, fixed vol. 1000 μ L, ecopipette	0.80	0.20
C5000-1A-5000	CAPP pipette, fixed vol. 5000 μ L, comfort	0.60	0.15
CXXX-1-YYY	Other fixed vol. pipettes (xxx=max pipette volume; yyy=desired volume)		

CAPP Aero 96

MULTICHANNEL PIPETTES

Easy and light tip mounting and ejection

Excessive use of the thumb is a major cause of repetitive strain injuries and user discomfort in multichannel pipetting.

The unique design of the **CAPP Aero 96 Multichannel Pipette** considerably reduces the thumb workload. Ejection is simply a matter of applying light pressure to the levered ejector arm.

Thanks to the double O-rings on the aluminum and metal nose cones, the **CAPP Aero 96 Multichannel Pipette** eliminates the need to 'hammer' your pipette into the tips rack to secure the optimal tip mounting. You now need only to apply a slight even pressure to perfectly secure tips to the nose cones. **CAPP Aero 96 Multichannel Pipettes** are one of the lightest pipettes on the market and produce a consistent and reliable liquid transfer result in one ergonomic solution.

Single Channel Accuracy and Precision in a Multichannel Package


The **CAPP Aero 96 Multichannel Pipette** guarantees single channel accuracy and precision across all channels due to the special design and construction of the CAPP piston assembly. The incredibly robust and fully autoclavable pipette body offers easy maintenance while the unique CAPP design with individually replaceable tip bases reduces the cost of what were once inevitable repairs.

The **CAPP Aero 96 Multichannel Pipette's** use of anodized aluminum and metal nose cones instead of plastic ones substantially reduces breakage due to accidental dropping and tips mounting. The majority of internal construction parts are made of lightweight metal components and, along with stainless steel pistons, ensure a highly robust performance for ultimate stability over time in terms of accuracy and precision. This smart and highly ergonomic pipette is built to last.



CAPP *Origami*

REAGENT RESERVOIRS

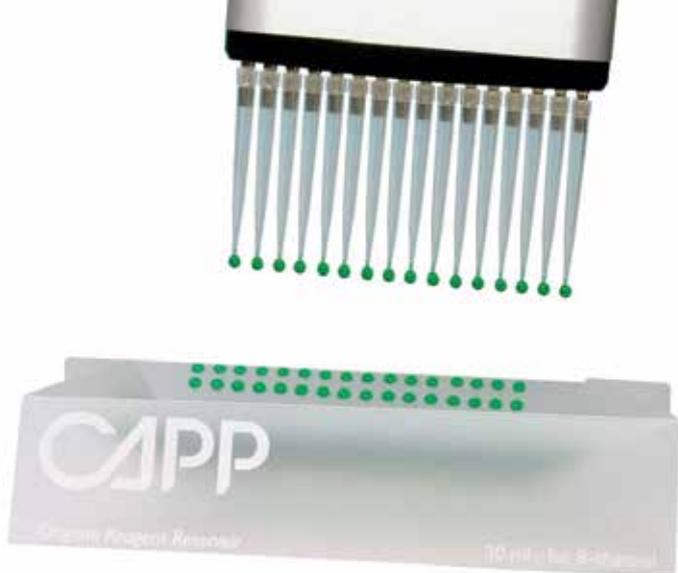

Use your reagent most efficiently with **CAPP *Origami*** Reagent Reservoirs.

The **CAPP *Origami*** represents a new way of thinking when it comes to reagent reservoirs.

The stiff architecture procure a consistently sharp V-shape reservoir. This makes pipetting easier and assures an efficient use of the reagent.

They are packed, shipped and stored as flat sheets.

To use the reservoir, simply flick it up by pushing the sides together. This environmentally and storage friendly product will save bench space and money.

Ordering Information

Reagent Reservoirs: **CAPP *Origami***™ 30mL and 40mL reservoirs for multichannel pipetting

Cat. No.	Description
CA40505	CAPPOrigami 30mL (8- and 16-channel pipettes), bag w/ 50 pcs.
CA40506	CAPPOrigami 30mL (8- and 16-channel pipettes), Pre-sterile, 10 bags w/ 5 pcs. each
CA40510	CAPPOrigami 40mL (12-channel pipettes), bag w/ 50 pcs.
CA40511	CAPPOrigami 40mL (12-channel pipettes), Pre-sterile, 10 bags w/ 5 pcs. each

CAPP *Aero 96* Multichannel pipettes

Cat. No.	Description	Inaccuracy %	Imprecision %	Colour
C10-8	CAPP multi pipettes, 8-channel, 0.5-10µL	5.00 /2.00	3.60 /1.00	○
C20-8	CAPP multi pipettes, 8-channel, 2-20µL	5.00 /2.00	3.60 /1.00	●
C50-8	CAPP multi pipettes, 8-channel, 5-50µL	3.20 /1.40	1.60 /0.60	●
C100-8	CAPP multi pipettes, 8-channel, 10-100µL	2.50 /1.30	1.20 /0.50	●
C200-8	CAPP multi pipettes, 8-channel, 20-200µL	1.80 /1.20	0.80 /0.40	●
C300-8	CAPP multi pipettes, 8-channel, 30-300µL	1.66 /1.40	0.60 /0.30	●
C10-12	CAPP multi pipettes, 12-channel, 0.5-10µL	5.00 /2.00	3.60 /1.00	○
C20-12	CAPP multi pipettes, 12-channel, 2-20µL	5.00 /2.00	3.60 /1.00	●
C50-12	CAPP multi pipettes, 12-channel, 5-50µL	3.20 /1.40	1.60 /0.60	●
C100-12	CAPP multi pipettes, 12-channel, 10-100µL	2.50 /1.30	1.20 /0.50	●
C200-12	CAPP multi pipettes, 12-channel, 20-200µL	1.80 /1.20	0.80 /0.40	●
C300-12	CAPP multi pipettes, 12-channel, 30-300µL	1.66 /1.40	0.60 /0.30	●



PIPETTING

CAPP Aero384

MULTICHANNEL PIPETTES

CAPP Aero384 Multichannel Pipettes For 384-well Plates

Most applications involving 384-well plates are performed using automated systems.

CAPP provides the world's only alternative for the quick and high precision pipetting of 16-, 48-, or 64-wells at once without the use of expensive, automated equipment.

Ideal For 384-well Liquid Handling

The **CAPP Aero384** 48 & 64 channel pipette allows for pipetting large samples within a short period of time while reducing the workload.

The **CAPP Aero384** is generally applicable for all transfers of liquids from reservoir and 384 deep-well plates into 384 well test plates, and it offers very obvious advantages in PCR, micro array, and MALDI spectrometry techniques.

CAPP Aero384 Multichannel Pipettes feature lightweight construction and produce a consistent and reliable liquid transfer result in one ergonomic solution.

EXPellPlus384™ Low Retention Tips

High quality, low retention tips

CAPP offers a range of **EXPellPlus384™** tips which are specifically designed to perfectly fit the **CAPP** range of 384 well pipetting. Due to special polymers and an extremely smooth inside surface, the **EXPellPlus384™** tips from **CAPP** virtually eliminate sample retention, and reduce the binding of DNA, RNA, and Proteins to a minimum.


The range also includes a filter tip version to effectively prevent cross contamination due to aerosol formation (such as DNA), and dangers from toxic, infectious, radioactive or other hazardous material's carry over.



384-WELL PCR PLATES

CAPP EXpell 384-well PCR plates are the ideal choice for PCR applications, thanks to their unique PP composition, their rigid form as well as the universal compatibility with basically all standard 384-well cyclers and many 384-well block (q)PCR cycler models.

The ultra thin walls of **EXpell 384-well PCR plates** are specially treated to minimize the binding of proteins. **CAPP** plates are DNA, DNase, RNA, RNase and Pyrogen free certified and autoclavable. They feature an extremely low evaporation grade of less than 3%, enabling processing PCR volumes as small as 5µL. **CAPP** provides the optical adhesives (Cat. No. 5100400C) ensuring the most optimal closure of **EXpell 384-well PCR plates**.

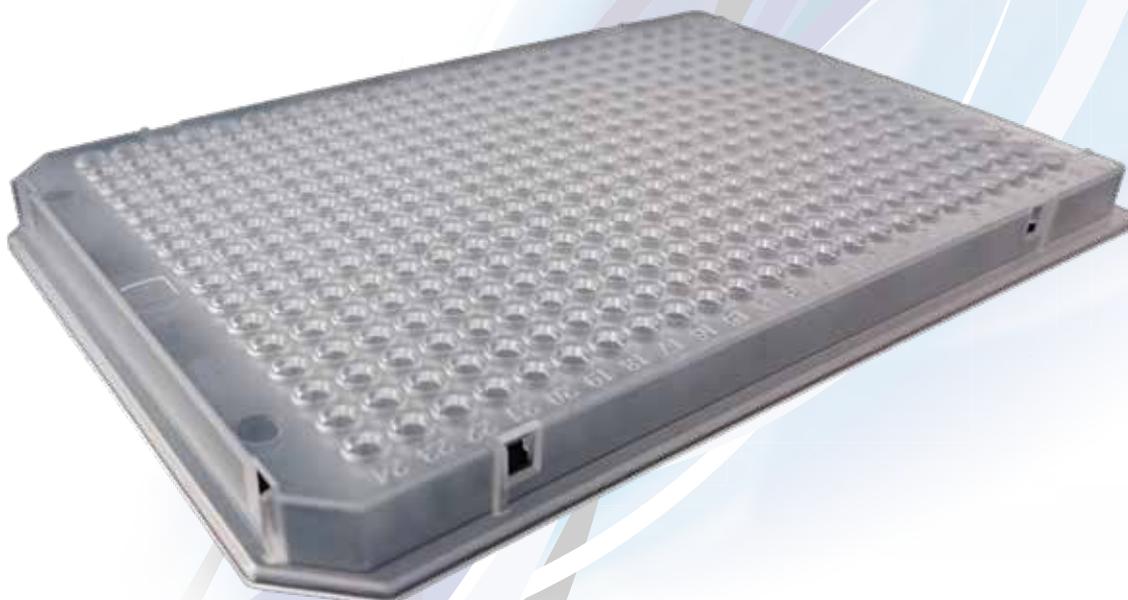

Ordering Information

Cat. No.	Description	Inaccuracy %	Imprecision %	Colour
C02-16	CAPP multi pipettes, 16-channel, 0.2-2µL	4.00	2.00	●
C10-16	CAPP multi pipettes, 16-channel, 0.5-10µL	2.00	1.00	○
C50-16	CAPP multi pipettes, 16-channel, 5-50µL	1.40	0.60	●
C10-48	CAPP multi pipettes, 48-channel, 0.5-10µL	4.00	2.00	○
C10-64	CAPP multi pipettes, 64-channel, 0.5-10µL	4.00	2.00	○

EXpellPlus 384 Low Retention Tips

Cat. No.	Description	Qty/pack	Packs/case
5030005C	ExpellPlus 0.2-50µL, racked, sterile	10 x 384	5
5030006C	ExpellPlus 0.2-50µL, racked, sterile, filtered	10 x 384	5

EXpellPlus 384-well PCR Plates

Cat. No.	Description
5100513C	Expell 384-well PCR plate, natural, 320 pcs.
5100400C	Expell PCR Optical Disposable Adhesive, 100 pcs.

CAPP *Trio*

TRI-VOLUME PIPETTES

As the only pipette manufacturer that offers pipettes with detachable volume controllers, **CAPP** introduces a ready-to-go pipette set which includes three fixed volume knobs.

Highlights:

- Quick volume switch: 3 fixed pipettes in 1!
 - Ideal for routine work
- Customizable Volume Selection
 - Fully Autoclavable



Ordering Information

Cat. No.	Description	Inaccuracy %	Imprecision %	Colour
C10-T1	Capp Tri-volume pipettes, 1µL, 5µL, 10µL	2.50 /1.00	1.80 /0.50	○
C100-T2	Capp Tri-volume pipettes, 20µL, 50µL, 100µL	2.00 /0.70	0.80 /0.20	●
C1000-T3	Capp Tri-volume pipettes, 200µL, 500µL, 1000µL	1.50 /0.80	0.40 /0.15	●
CXXX-T	Capp Tri-volume pipettes, Custom Set			

CAPP *Microbiology*

SINGLE CHANNEL PIPETTES

CAPP *Microbiology* Pipettes are ideal for microbiology tests in the food industry.

This pipette is supplied with three fixed volume knobs at 100 μ L, 900 μ L and 1000 μ L and has a modified tip cone suited for use with a sterile extended length straw. This allows further reach and pipetting of viscous liquids such as milk, cream, yoghurt and cosmetics.

CAPP *Microbiology* Pipettes are ideal instruments for protocols involving dilution of 1:10.

Highlights:

- Extended Reach
- Rotation Free Volume Selection
- Pre-set Calibrated Volume Controllers
- Fully Autoclavable
- Customizable Volume Selection
- Fully Autoclavable



Ordering Information

CAPP *Microbiology* Pipettes (for use with sterile straws)

Cat. No.	Description	Inaccuracy %	Imprecision %
C1000-1BS	CAPP Microbiology pipette, with 100 μ L, 900 μ L and 1000 μ L volume knobs	2.50/0.80	2.50/0.50
4170807	Pre-sterile straws for CAPP Microbiology pipette, 40x25 pcs.		

CAPP Accessories

MECHANICAL PIPETTES

CAPP offers a comprehensive selection of practical accessories to complement its full line of mechanical pipettes. Uniquely designed and quality made they combine design, style and simplicity to deliver an optimal storage and safety solutions for modern laboratories.

Precalibrated interchangeable adjustable and fixed volume knobs set **CAPP** pipettes aside from any other liquid handling pipette on a market by allowing users to use one pipette with many fixed volume knobs to substantially reduce cost.

Now, instead of four fixed volume pipettes, for example, you can buy one **CAPP** pipette and four inexpensive knobs to achieve the same precise results.

- **Stackable CAPP Combi Stand** can be connected to one another to create infinite support from one pipette to as many as user might need. C-01 comes with 2 modules for support of up to 3 mechanical pipettes
- **CAPP Carousel S-06** provides ultimate space saving solution for up to 6 mechanical pipettes
- **T-01 CAPPTimer** is a simple, hence reliable tool with audible alarm feature
- **Shaft filters** provide an economical solution to eliminate “splash effect” and will substantially reduce risk of sample and shaft contamination



Ordering Information

Pipette Filters

Cat. No.	Description
C1000-1-FT	Disposable filter for use with CAPP ecopipette 100-1000µL, bag w/ 50 pcs.
C5000-1-FT	Disposable filter for use with CAPP ecopipette 1-5mL, bag w/ 25 pcs.
B510ML-1-FT	Disposable filter for use with CAPPBravo pipettes, 1-5mL & 1-10mL, bag w/ 25 pcs.

Ordering Information

Pipette Stands

Cat. No.	Description
C-05	Pipette stand for up to 5 CAPP mechanical pipettes, all models
C-04	Pipette stand for up to 4 CAPPMaestro pipettes or all mechanical pipettes
C-01	Combi stand (2 modules) for up to 3 mechanical pipettes, except CAPPBravo
S-06	Carousel stand for up to 6 CAPP mechanical pipettes, except CAPPBravo
E-stand	Stand for up to 3 CAPPTronic pipettes
00392-1	Block for 4 volume controllers

Timer

Cat. No.	Description
T-01	CAPPTimer™

Extra Volume Knobs For CAPP Mechanical Pipettes

Cat. No.	Description	Colour
2-VZ	Variable volume controller knob for 0.2-2µL pipettes	●
10-VZ	Variable volume controller knob for 0.5-10µL pipettes	○
20-VZ	Variable volume controller knob for 2-20µL pipettes	●
50-VZ	Variable volume controller knob for 5-50µL pipettes	●
100-VZ	Variable volume controller knob for 10-100µL pipettes	●
200-VZ	Variable volume controller knob for 20-200µL pipettes	●
300-VZ / 1	Variable vol. controller knob, 30-200µL, for 30-300µL pipettes	●
300-VZ	Variable vol. controller knob, 125-300µL, for 30-300µL pipettes	●
1000-VZ	Variable volume controller knob for 100-1000µL pipettes	●
1000-VZ-M	Variable volume controller knob for 100-1000µl pipettes (2µL increment)	●
5000-VZ	Variable volume controller knob for 1000-5000µL pipettes	●
5000-VZ-M	Variable volume controller knob for 1000-5000µl pipettes (10µL increment)	●
10000-VZ-M	Variable volume controller knob for 1000-10000µl pipettes	●
02-FE-1	1µL fixed volume controller knob for 0.2-2µL pipette	
02-FE-2	2µL fixed volume controller knob for 0.2-2µL pipette	●
10-FE-5	5µL fixed volume controller knob for 0.5-10µL pipette	○
10-FE-10	10µL fixed volume controller knob for 0.5-10µL pipette	○
20-FE-10	10µL fixed volume controller knob for 2-20µL pipette	●
20-FE-20	20µL fixed volume controller knob for 2-20µL pipette	●
50-FE-20	20µL fixed volume controller knob for 5-50µL pipette	●
50-FE-25	25µL fixed volume controller knob for 5-50µL pipette	●
50-FE-50	50µL fixed volume controller knob for 5-50µL pipette	●
100-FE-30	30µL fixed volume controller knob for 10-100µL pipette	●
100-FE-50	50µL fixed volume controller knob for 10-100µL pipette	●
100-FE-100	100µL fixed volume controller knob for 10-100µL pipette	●
200-FE-100	100µL fixed volume controller knob for 20-200µL pipette	●
200-FE-200	200µL fixed volume controller knob for 20-200µL pipette	●
300-FE-300	300µL fixed volume controller knob for 30-300µL pipette	●
1000-FE-500	500µL fixed volume controller knob for 100-1000µL pipette	●
1000-FE-1000	1000µL fixed volume controller knob for 100-1000µL pipette	●
5000-FEA-5000	5000µL fixed volume controller knob for 1-5mL, model AZ	●
XXX-FE-YYY	Other fixed vol. controllers, ecopipette	



PIPETTING

CAPP *Maestro*

ELECTRONIC PIPETTES

CAPP *Maestro* is the electronic pipette that combines all benefits that the modern researcher needs. The Favourites button is the first function that you will see on **CAPP *Maestro***'s fully coloured OLED display. The coloured OLED display gives better optical control while pipetting as it has better contrast and a greater screen refresh rate compared to the other LCD screens. Also, an OLED display consumes less power compared to the other displays.

Lightweight construction and elegant ergonomic design with a wide hook allows you to rest the pipette at the palm of your hand with no need to actually "grab it".

CAPP *Maestro*'s tip ejector also works as a finger rest for your thumb. Simply rest your thumb on the tip ejector, and gently activate the pipetting button at the same time.

Optimize your serial work with advanced functions such as multi dispensing, dilution and mixing, all available on **CAPP *Maestro*** while easily navigating through the user-friendly graphic intuitive interface that is self explanatory and can be operated very easily!

For your routine lab work, **CAPP *Maestro*** allows you to easily store your favorite protocols and to switch from one to the other in a matter of 2 clicks.

If you are tired of exchanging the batteries too often, then try **CAPP *Maestro*** that uses lithium batteries which are ideal for long-lasting performance. You can also use this electronic pipette while it is charging.

Calibration and password setting functions are available on this pipette.



Ordering Information

Cat. No.	Description	Inaccuracy %	Imprecision %
M10-1	CAPPMaestro single channel, 0,2-10µL	2.50 / 1.00	1.80 / 0.50
M100-1	CAPPMaestro single channel, 5-100µL	2.50 / 0.70	1.00 / 0.20
M200-1	CAPPMaestro single channel, 10-200µL	2.50 / 0.60	0.70 / 0.20
M1000-1	CAPPMaestro single channel, 50-1000µL	2.00 / 0.80	0.60 / 0.20
M5000-1	CAPPMaestro single channel, 500-5000µL	2.40 / 0.60	0.60 / 0.15

CAPP *Tronic*

ELECTRONIC PIPETTES



The **CAPP *Tronic*** is certainly one of the easiest electronic pipettes to set and use. Having only a one-side programming manual, familiarizing yourself with **CAPP *Tronic***'s functions takes just a matter of minutes.

Apart from standard pipetting, you can choose between the most widely used pipetting modes - including reverse pipetting, multi dispensing, mixing and sequential dispensing.

Up to nine individual protocols can be stored thanks to the extensive memory capacity.

Supplied with one long-life and easily exchangeable lithium battery, the **CAPP *Tronic*** allows for uninterrupted pipetting without the need to stop work in order to recharge.

The O-rings on the tip base provides an excellent fit with a great variety of universal fitting tips.



Ordering Information

Cat. No.	Description	Inaccuracy %	Imprecision %	Colour
E20-8BA	CAPPTronic electronic pipette, 8-channel, 2-20 μ L	1.00	0.30	●
E200-8BA	CAPPTronic electronic pipette, 8-channel, 10-200 μ L	0.60	0.15	●
E1200-8BA	CAPPTronic electronic pipette, 8-channel, 100-1200 μ L	0.50	0.15	●

CAPP *Tempo*

ELECTRONIC PIPETTES

The **CAPP *Tempo*** pipette controller has revolutionary features that separate it from other pipette controllers.

LED Display

- Display shows aspiration and dispense speeds
- Displays remaining battery life and flashes when the power is low
- Display turns-off after 20 seconds of non-use to conserve battery

Adjustable speeds

- Powerful motor fills 25mL in 5 seconds (at speed level six)
- Separate speed controls for aspiration and dispense modes
- Six different speed settings for both aspiration and dispense modes

Electronic Brake System (EBS)

- Apply EBS to slow down at the last second to dial in the most accurate volume
- Press EBS a second time to return to max speed
- EBS maximizes speed and precision

Power Supply

- Lithium ion battery, full charge provides 8 hours of continuous use
- Battery can be charged while pipette is in use

Ordering Information

Cat. No.	Description
T100-B	CAPPTempo Blue
T100-G	CAPPTempo Green
T100-R	CAPPTempo Red
T100-V	CAPPTempo Violet
T100-CS	CAPPTempo Charging Stand





CAPP *Controller*

MOTORIZED PIPETTE CONTROLLER

Features:

- Light and fatigue free: weighs only 167g including the battery
- Lithium battery with no memory effect and up to 12 hours of continuous use
 - Can be charged while in use
- Powerful: 50mL pipette is filled in less than 10 seconds
 - Express dispensing: depress the dispensing button beyond the built-in point of resistance
- Gravity delivery and blow-out dispensing mode selection
 - Fully adjustable speed-setting
- Exchangeable 0.2 μ m PTFE disc filter acts as effective shut-down system if overfill occurs
 - Exchangeable pipette holders are made of silicon
- For use with glass or plastic pipettes ranging from 0.1mL to 100mL
 - Vapour outlet for venting out corrosive liquids or fumes
- Fully autoclavable nose cone
 - UV-resistant housing
 - Complies with CE and RoHS



Ordering Information

Cat. No.	Description
PA-100	CAPPController Motorized Controller, 0.1-100mL

CAPP Forte

BOTTLE-TOP DISPENSER

Made of highly chemical-resistant materials, such as PTFE, PFA, Borosilicate and Platinum, **CAPP Forte Bottle-Top Dispenser** is the ideal choice for dispensing bases, acids and solvents.

Using the positive displacement principle, where the tightly fitting piston wipes the walls of the glass-cylinder, removing the liquid completely, **CAPP Forte** can be used for dispensing media that are difficult to handle, such as crystallizing, viscous, foaming or vaporizing liquids. Autoclavable at 121° C / 250° F, **CAPP Forte** can also be used for sterile applications.

For use with Hydrogen fluoride/ Hydrofluoric acid, **CAPP Forte Bottle-Top Dispenser** offers a specially adjusted model, called CF10-1-HF (1-10mL), where the dispensed liquid comes into contact only with the materials of PFA, Al₂O₃, FEP, ETFE, PTFE, platinum-iridium and PVDF.

CAPP Forte Bottle-Top Dispenser offers a range of features which increase user safety and comfort. Locking the 3-way-valve disables the dispensing function, preventing unintentional reagent flow. Additionally, the system can be evacuated without removing the unit from the bottle, and the transparent plastic sleeve protects the user from cuts and splashes in case of an accidental glass break.


Both right and left-handed users can quickly and accurately set up the desired volume using the slide-and-lock volume setting button. The discharge tube can be rotated, making the bottle label visible at any time. The telescope intake tube is easily adjustable, fitting reagent bottles without cutting. Three PP-adapters for the most common bottle sizes are supplied with the instrument.

Specifications:

Volume	Volume steps	Thread	Adapters GL	Accuracy %	Precision %
0.25 – 2.50 mL	0.05 mL	GL 32	28, 40, 45	0.6%	≤0.1%
0.50 – 5.00 mL	0.10 mL	GL 32	28, 40, 45	0.5%	≤0.1%
1.00 – 10.00 mL	0.20 mL	GL 32	28, 40, 45	0.5%	≤0.1%
2.50 – 25.00 mL	0.50 mL	GL 45	38, 40, 38/32	0.5%	≤0.1%
5.00 – 50.00 mL	1.00 mL	GL 45	38, 40, 38/32	0.5%	≤0.1%

Ordering Information

Cat. No.	Description
CF2-1	CAPP Forte Bottle-Top Dispenser, 0.25-2.5mL
CF5-1	CAPP Forte Bottle-Top Dispenser, 0.5-5mL
CF10-1	CAPP Forte Bottle-Top Dispenser, 1-10mL
CF25-1	CAPP Forte Bottle-Top Dispenser, 2.5-25mL
CF50-1	CAPP Forte Bottle-Top Dispenser 5-50mL
CF10-1-HF	CAPP Forte Bottle-Top Dispenser, 1-10mL HF for use with Hydrogen fluoride/ Hydrofluoric acid

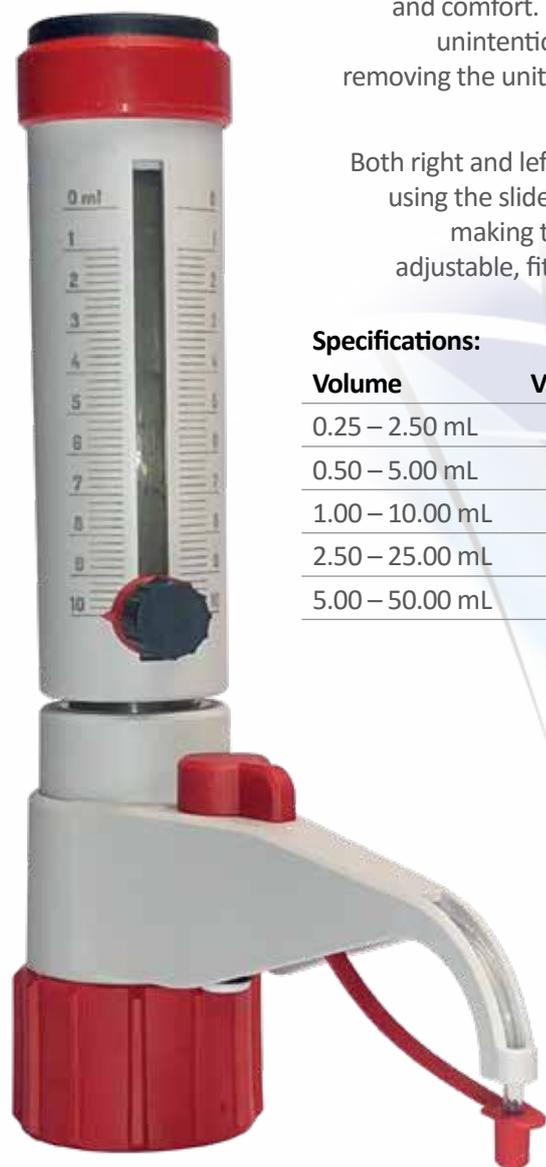

CAPP *Rhythm*

MECHANICAL REPEATER

Features:

- Reliable ergonomics for your lab routine without sacrificing ultimate precision
- Covers the complete set of dispensing volumes 1-5000µL
- Single-handed volume selection, loading and dispensing
- Minimum maintenance requirements
- Robust design and construction
- Almost no wear on parts
- Lightweight – only 105g
- One year warranty



Ordering Information

Cat. No.	Description
PR-50	CAPPRhythm Mechanical Repeater, 0.1-50mL

CAPP *Rhythm* Dispensing Volumes

Setting	1	2	3	4	5
TIPS/ Steps	48	23	15	11	8
0.05mL	1µL	2µL	3µL	4µL	5µL
0.5mL	10µL	20µL	30µL	40µL	50µL
1mL	20µL	40µL	60µL	80µL	100µL
1.25mL	25µL	50µL	75µL	100µL	125µL
2.5mL	50µL	100µL	150µL	200µL	250µL
5mL	100µL	200µL	300µL	400µL	500µL
12.5mL	250µL	500µL	750µL	1000µL	1250µL
25mL	500µL	1000µL	1500µL	2000µL	2500µL
50mL	1000µL	2000µL	3000µL	4000µL	5000µL

CAPP R10

MECHANICAL REPEATER

Features:

- Highly resistant towards a broad range of chemicals
- Easier selection and dispensing through a vision panel
- Reliable and maintenance-free due to its robust design
- Flexible: 12 tip sizes, 10 volume adjustments and 120 program steps
- Reliable ergonomics for your lab routine without sacrificing ultimate precision
- The table below shows all dosing possibilities at a glance for choosing the most suitable tip for your application
- Handy, having a perfect ergonomic design. One-hand operation of volume selection, loading and dispensing of liquids
- Convenient: the easy-moving dosing button and the lightweight instrument makes long dosing series more comfortable
- High compatibility: **CAPP R10** mechanical repeater is compatible both with **CAPP Harmony** syringes and also with tips of many common brands



CAPP R10 Dispensing Volumes

Program No.	1	2	3	4	5	6	7	8	9	10
0.05mL	1 µL	1.5µL	2µL	2.5µL	3µL	3.5µL	4µL	4.5µL	5µL	5.5µL
0.1mL	2 µL	3µL	4µL	5µL	6µL	7µL	8µL	9µL	10µL	11µL
0.2mL	4 µL	6µL	8µL	10µL	12µL	14µL	16µL	18µL	20µL	22µL
0.5mL	10 µL	15µL	20µL	25µL	30µL	35µL	40µL	45µL	50µL	55µL
1mL	20 µL	30µL	40µL	50µL	60µL	70µL	80µL	90µL	100µL	110µL
1.25mL	25 µL	37.5µL	50µL	62.5µL	75µL	87.5µL	100µL	112.5µL	125µL	137.5µL
2.5mL	50 µL	75µL	100µL	125µL	150µL	175µL	200µL	225µL	250µL	275µL
5mL	100 µL	150µL	200µL	250µL	300µL	350µL	400µL	450µL	500µL	550µL
10mL	200µL	300µL	400µL	500µL	600µL	700µL	800µL	900µL	1000µL	1100µL
12.5mL	250µL	375µL	500µL	625µL	750µL	875µL	1000µL	1125µL	1250µL	1375µL
25mL	500 µL	750µL	1000µL	1250µL	1500µL	1750µL	2000µL	2250µL	2500µL	2750µL
50mL	1000 µL	1500µL	2000µL	2500µL	3000µL	3500µL	4000µL	4500µL	5000µL	5500µL
Steps	48	31	22	18	14	12	10	9	8	7

Ordering Information

Cat. No.	Description
PR-10	CAPP R10 Mechanical Repeater

EX Pell and EX PellPLUS

FILTER TIPS

Filter tips are primarily used to prevent cross-contamination on critical applications such as in the field of Molecular Biology.

More than 25 years of expertise as a pipette manufacturer gives **CAPP** the necessary know-how to select and design tips that match the expectations of the strictest customers.

CAPP offers a wide range of high quality tips to fulfill the pipetting needs of research, diagnostics and analytical laboratories.

Premium design

- Universal compatibility to the great majority of pipette brands on the market
- Different lengths within the same volume range for different applications
- Crystal clear clarity and increment marks for convenience of use

Premium portfolio

- Select from **EX PellPlus** low retention or **EX Pell** standard (both of premium quality)
- Options of bulk, racked, racked-sterile, reloads, racked-sterile-filtered and bulk-filtered tips
- Different designs of tips within the same volume range to fit almost all pipettes available on the market

Premium manufacturing

- Absolutely no compromise made on the quality parameters
- Clean-room facility to eliminate the risk of contamination
- Certified RNase, DNase, DNA and Pyrogen free
- Superb quality, Swiss made injection molds
- Made from virgin polypropylene

Premium design


Universal tip compatibility
Crystal clear clarity
Accurate graduation marks

Premium filter

Controlled pore size
No use of additives
Pure for molecular, clinical and life science use
Dimensional consistency

Premium specifications

Low retention properties
Great finish, flash-free orifice
Certified DNase, RNase, DNA/RNA, Pyrogen Free

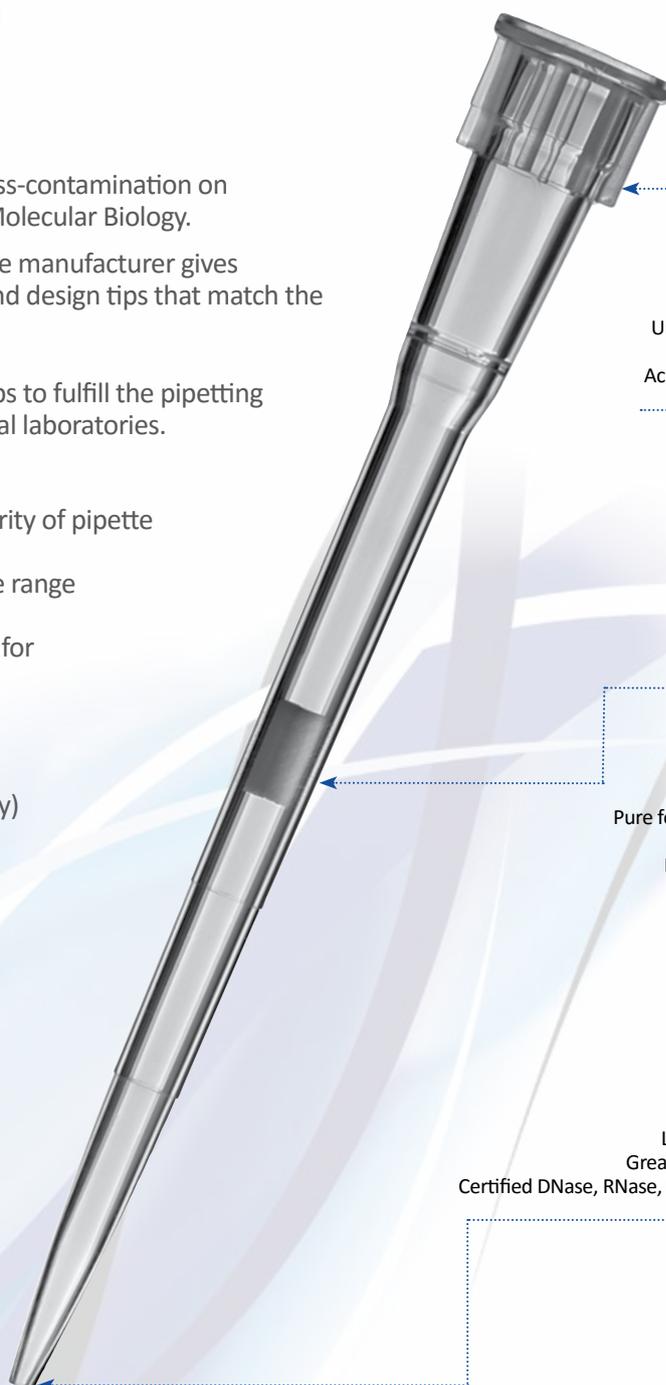

**Stop adding more plastic into the environment!
Change to CAPP PaperBox carton racks for Filter Tips.**

- 100% recyclable;
- packed in space-saving, easy to use dispenser towers;
- pick up your PaperBox rack directly from the dispenser box;
- ready to use with 1-, 8- and 12-channel pipettes;
- applicable to CAPP refill system in standard plastic racks;
- Top quality filter tips



Ordering Information

EXPell and EXPellPlus Filter tips

Cat. No.	Description
5030030C	ExpellPlus 10µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130030C	Expell 10µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131030C	Expell 10µL, bag, w/ filter, 20x1000 pcs.
5030060C	ExpellPlus 10µL XL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130060C	Expell 10µL XL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131060C	Expell 10µL XL, bag, w/ filter, 20x1000 pcs.
5030061C	ExpellPlus 10µL XL, Extra Narrow, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130061C	Expell 10µL XL, Extra Narrow, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131061C	Expell 10µL XL, Extra Narrow, bag, w/ filter, 20x1000 pcs.
5030062C	ExpellPlus 20µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130062C	Expell 20µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131062C	Expell 20µL, bag, w/ filter, 10x1000 pcs.
5030066C	ExpellPlus 100µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130066C	Expell 100µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131066C	Expell 100µL, bag, w/ filter, 10x1000 pcs.
5030090C	ExpellPlus 200µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130090C	Expell 200µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5131090C	Expell 200µL, bag, w/ filter, 10x1000 pcs.
5030115C	ExpellPlus 300µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130150C	Expell 1000µL, pre-sterile w/ filter, hinged racks, 4x8x96 pcs.
5131150C	Expell 1000µL, bag, w/ filter, 10x1000 pcs.
5130123C	Expell 1250µL XL, pre-sterile w/ filter, hinged racks, 4x8x96 pcs.

EXPell and EXPellPlus low retention filter tips available in PaperBox carton racks

Cat. No.	Description
5030029C	ExpellPlus 10µL, pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5030059C	ExpellPlus 10µL XL, extra narrow pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5030063C	ExpellPlus 20µL, pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5030064C	ExpellPlus 100µL, pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5030089C	ExpellPlus 200µL, pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5030114C	ExpellPlus 300µL, pre-sterile w/ filter, PaperBox, 5x10x96 pcs.
5130149C	Expell 1000µL, pre-sterile w/ filter, PaperBox, 4x8x96 pcs.
5130119C	Expell 1250µL XL, pre-sterile w/ filter, PaperBox, 4x8x96 pc.



EXPellPLUS

INDIVIDUALLY WRAPPED TIPS

EXPellPlus individually wrapped tips are ideal for sensitive applications requiring the strictest aseptic conditions.

Their unique individual packing ensures sterility for every single pipetting cycle, maximizing the exceptional performance of EXPellPlus sterile tips. Assuring the greatest purity standards, EXPellPlus individually wrapped tips are free from Endotoxin, DNA, DNase, RNase and PCR inhibitor.

Available in four volume sizes: 10µL standard and extended length, 200µL and 1000-1250µL, EXPellPlus individually wrapped tips are universally compatible with the majority of pipette brands available on the market. Thanks to the unique composition of plastic polymer, the inner surface of EXPellPlus individually wrapped tips is more hydrophobic, which significantly reduces sample adhesion. These low retention properties minimize sample binding inside the tip, making EXPellPlus tips ideal for applications requiring high accuracy and reproducibility.

EXPellPlus individually wrapped tips are sterile. Batch number and expiration date are printed on each individual wrap.



Ordering Information

Cat. No.	Description
5030012C	ExpellPlus 10µL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped tips
5030042C	ExpellPlus 10µL XL, pre-sterile, long, clear, bag, 5x400 pcs. individually wrapped tips
5030072C	ExpellPlus 200µL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped tips
5130132C	Expell 1000µL (1250µL), pre-sterile, clear, bag, 5x200 pcs. individually wrapped tips

CONSUMABLES

EXPELLPLUS


LOW RETENTION TIPS

Thanks to the unique composition of the plastic polymer, **CAPP's** premium **EXPELLPLUS** low retention pipette tips have an ultra-smooth inner surface, minimizing any sample binding. The polymer composition along with the high quality Swiss molds, on which the tips are manufactured, enables **CAPP** to obtain the low retention properties without the use of any surface additives.

EXPELLPLUS low retention tips are ideal for pipetting viscous samples, which are normally difficult to dispense in full. Samples such as plasma, enzymes, foaming liquids, detergents, TRIS or BSA can be handled comfortably and without any waste with **CAPP** low retention tips. Additionally, **EXPELLPLUS** low retention tips can significantly reduce the waste of expensive reagents.

EXPELLPLUS low retention tips are the perfect choice for volumes below 1mL and help to improve the accuracy and reproducibility of pipetting results. Even the smallest amount of liquid remaining in the tip after dispensing can have a negative impact on the pipetting results. **CAPP EXPELLPLUS** low retention tips are manufactured in a clean-room facility and are all RNase, DNase and Pyrogen free certified and sterile.

Below picture shows a comparison of the liquid remaining after dispensing in a standard tip and in an **EXPELLPLUS** low retention tip. **EXPELLPLUS** low retention tips are universally compatible with the majority of other pipette brands.

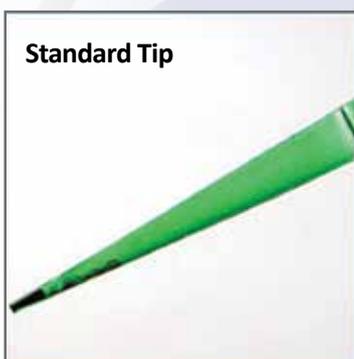

Ordering Information

EXPELLPLUS Low Retention Non-Filter Tips

Cat. No.	Description
5030010C	ExpellPlus 10µL, pre-sterile, clear, bag, 20x1000 pcs.
5030012C	ExpellPlus 10µL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5030020C	ExpellPlus 10µL, pre-sterile, hinged racks, 5x10x96 pcs.
5030040C	ExpellPlus 10µL XL, pre-sterile, clear, bag, 20x1000 pcs.
5030042C	ExpellPlus 10µL XL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5030050C	ExpellPlus 10µL XL, pre-sterile, hinged racks, 5x10x96 pcs.
5030051C	ExpellPlus 10ul XL, Extra Narrow, pre-sterile, hinged racks, 5x10x96 pcs.
5030070C	ExpellPlus 200µL, pre-sterile, clear, bag, 30x1000 pcs.
5030072C	ExpellPlus 200µL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5030080C	ExpellPlus 200µL, pre-sterile, hinged racks, 5x10x96 pcs.
5130110C	ExpellPlus 300µL, pre-sterile, hinged racks, 5x10x96pcs

EXPELLPLUS Low Retention Filter Tips

Cat. No.	Description
5030030C	ExpellPlus 10µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030060C	ExpellPlus 10µL XL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030061C	ExpellPlus 10µL XL, Extra Narrow, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030062C	ExpellPlus 20µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030066C	ExpellPlus 100µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030090C	ExpellPlus 200µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030115C	ExpellPlus 300µL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.

EX Pell and EX PellPLUS

RACKED TIPS

CAPP offers a wide portfolio of racked pipette tips. The racks are compatible with **CAPP** bulk tips of the corresponding volume sizes as well as with **CAPP** reload system. All **CAPP** racked pipette tips are manufactured on superb quality, Swiss-made injection molds ensuring a Premium quality.

The racked tips product portfolio covers filter, non-filter, sterile and non-sterile tips. On the top of that, **CAPP** racked tips are available as **EX Pell** standard quality and **EX PellPlus** low-retention tips.

Both versions are universally compatible with great majority of the pipette brands available on the market.

In order to support a wider range of applications, **CAPP** racked tips are available in different lengths within the same volume range. The autoclavable racks are packed in user-friendly and space-saving dispenser boxes, including 10 racks (for the majority of volume sizes) or 8 racks for the 1mL tips.

Made of virgin polypropylene, **CAPP** racked tips are RNase, DNase and Pyrogen free certified. The **EX PellPlus** racked tips have unique low retention properties, reducing sample binding to the minimum and significantly improving your pipetting results.





Ordering Information

Cat. No.	Description
5030015C	Expell 10 μ L, hinged racks, 5x10x96 pcs.
5030020C	ExpellPlus 10 μ L, pre-sterile, hinged racks, 5x10x96 pcs.
5030030C	ExpellPlus 10 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130030C	Expell 10 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030045C	Expell 10 μ L XL, hinged racks, 5x10x96 pcs.
5030046C	Expell 10 μ L XL, Extra Narrow, hinged racks, 5x10x96 pcs.
5030050C	ExpellPlus 10 μ L XL, pre-sterile, hinged racks, 5x10x96 pcs.
5030051C	ExpellPlus 10 μ L XL, Extra Narrow, pre-sterile, hinged racks, 5x10x96 pcs.
5030060C	ExpellPlus 10 μ L XL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130060C	Expell 10 μ L XL, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030061C	ExpellPlus 10 μ L XL, Extra Narrow, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130061C	Expell 10 μ L XL, Extra Narrow, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030062C	ExpellPlus 20 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130062C	Expell 20 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030066C	ExpellPlus 100 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130066C	Expell 100 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5030075C	Expell 200 μ L, hinged racks, 5x10x96 pcs.
5030080C	ExpellPlus 200 μ L, pre-sterile, hinged racks, 5x10x96 pcs.
5030090C	ExpellPlus 200 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130090C	Expell 200 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130105C	Expell 300 μ L, hinged racks, 5x10x96 pcs.
5130110C	ExpellPlus 300 μ L, pre-sterile, hinged racks, 5x10x96 pcs.
5030115C	ExpellPlus 300 μ L, pre-sterile w/ filter, hinged racks, 5x10x96 pcs.
5130135C	Expell 1000 μ L (1250 μ L), hinged racks, 4x8x96 pcs.
5130140C	Expell 1000 μ L (1250 μ L), pre-sterile, hinged racks, 4x8x96 pcs.
5130150C	Expell 1000 μ L, pre-sterile w/ filter, hinged racks, 4x8x96 pcs.
5130121C	Expell 1250 μ L XL, hinged racks, 4x8x96 pcs.
5130122C	Expell 1250 μ L XL, pre-sterile, hinged racks, 4x8x96 pcs.
5130123C	Expell 1250 μ L XL, pre-sterile w/filter, hinged racks, 4x8x96 pcs.
5130165C	Expell 5000 μ L, pre-sterile, racks, 10x50 pcs.
5130195C	Expell 10000 μ L, pre-sterile, racks, 10x25 pcs.

EXPell

RELOAD SYSTEM

EXPell pipette tips reload system is available for 10 μ L standard and extended length as well as for the 200 μ L and 1000-1250 μ L tips. Depending on the tip volume, it consists of towers with 5 or 10 insert plates containing 96 tips each.

The system is extremely easy to use: take off the tower cover and pick up the insert plate with tips. Place it into the empty rack. The rack has been refilled with 96 tips.

EXPell reload system enables multiple savings. It reduces the shipping cost significantly by cutting off up to 75% of the volume being shipped. The tips in an **EXPell** reload system are packed more compact compared to standard racked or bulk tips.

In the **EXPell** reload system the tips from the upper insert plate are partially placed into the tips of the lower plate, resulting in a slim tower, taking much less space than a single box with 10 racked tips.

CAPP EXPell reload system reduces the plastic waste. Each rack can be reused multiple times and apart from the insert plates with tips, there is no further plastic component in the **EXPell** reload system – only the recyclable carton packaging.

Further saving with **EXPell** reload system concerns the space. Thanks to the minimal footprint, the towers of the **EXPell** reload system take as less space on the benchtop and in the storage room as possible.

The system is compatible with all **CAPP** racks of corresponding tip volumes.

Spare, empty racks are available as accessories.

Ordering Information

Cat. No.	Description
5030035C	Expell 10 μ L, reload, 10x10x96 pcs.
5030034C	Empty rack for 10 μ L reload tips, 50 pcs.
5030055C	Expell 10 μ L XL, reload, 10x10x96 pcs.
5030054C	Empty rack for 10 μ L XL tips, 50 pcs.
5030095C	Expell 200 μ L, reload, 10x10x96 pcs.
5030094C	Empty rack for 200 μ L reload tips, 50 pcs.
5130155C	Expell 1000 μ L (1250 μ L), reload, 10x5x96 pcs.
5130125C	Empty rack for 1000 μ L (1250 μ L) reload tips, 32 pcs.



EX Pell and EX Pell PLUS

BULK PIPETTE TIPS

EX Pell and **EX Pell Plus** Bulk tips come in self-standing and self-sealing plastic bags, enabling comfortable usage and storage.

The tips can be used directly from the bag or manually refilled into all **CAPP** racks. Each bag has a label showing the catalogue and the batch number for easier identification.

CAPP Bulk pipette tips are the ideal choice for cost-sensitive customers. The tips are manufactured under the same strict conditions as all other types of **CAPP** tips and are certified according to RNase, DNase, DNA and Pyrogen free standards. They offer universal compatibility with all major pipette brands on the market.



Ordering Information

EXPell Bulk Filter Tips

Cat. No.	Description
5131030C	Expell 10 μ L, bag, w/ filter, 5x1000 pcs.
5131060C	Expell 10 μ L XL, bag, w/ filter, 20x1000 pcs.
5131061C	Expell 10 μ L XL, Extra Narrow, bag, w/ filter, 20x1000 pcs.
5131062C	Expell 20 μ L, bag, w/ filter, 10x1000 pcs.
5131066C	Expell 100 μ L, bag, w/ filter, 10x1000 pcs.
5131090C	Expell 200 μ L, bag, w/ filter, 10x1000 pcs.
5131150C	Expell 1000 μ L, bag, w/ filter, 10x1000 pcs.

EXPell and EXPellPlus Bulk Non-filter Tips

Cat. No.	Description
5130010C	Expell 10 μ L, clear, bag, 20x1000 pcs.
5030010C	ExpellPlus 10 μ L, pre-sterile, clear, bag, 20x1000 pcs.
5030012C	ExpellPlus 10 μ L, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5130040C	Expell 10 μ L XL, clear, bag, 20x1000 pcs.
5030040C	ExpellPlus 10 μ L XL, pre-sterile, clear, bag, 20x1000 pcs.
5130041C	Expell 10 μ L XL, Extra Narrow, clear, bag, 20x1000 pcs.
5030042C	ExpellPlus 10 μ L XL, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5130070C	Expell 200 μ L, clear, bag, 30x1000 pcs.
4130075C	Expell 200 μ L, yellow, bag, 30x1000 pcs.
5030070C	ExpellPlus 200 μ L, pre-sterile, clear, bag, 30x1000 pcs.
5030072C	ExpellPlus 200 μ L, pre-sterile, clear, bag, 5x400 pcs. individually wrapped
5130100C	Expell 300 μ L, clear, bag, 10x1000 pcs.
5130130C	Expell 1000 μ L (1250 μ L), clear, bag, 10x1000 pcs.
4130135C	Expell 1000 μ L (1250 μ L), blue, bag, 10x1000 pcs.
5130132C	Expell 1000 μ L (1250 μ L), pre-sterile, clear, bag, 5x200 pcs. individually wrapped
5130120C	Expell 1250 μ L XL, clear, bag, 8x 500 pcs
5130160C	Expell 5000 μ L, clear, bag, 10x250 pcs.
5130190C	Expell 10000 μ L, clear, bag, 5x200 pcs.

EX Pell and EX PellPLUS

COMPATIBILITY CHART

For tips' compatibility with other pipette brands, please contact info@capp.dk




5130010C 5030010C 5030012C 5030015C 5030020C 5030035C	5030029C 5030030C 5130030C 5131030C	5130040C 5030040C 5030042C 5030045C 5030050C 5030055C	5030059C 5030060C 5130060C 5131060C	5130041C 5030041C 5030046C 5030051C	5030061C 5130061C 5131061C 5030063C	5030062C 5130062C 5131062C	5030064C 5030066C 5130066C 5131066C
--	--	--	--	--	--	----------------------------------	--

CAPP Bravo, ecopipette and CAPPaero single channel pipette	0.2-2µL 0.5-10µL	0.2-2µL 0.5-10µL	0.2-2µL 0.5-10µL	0.2-2µL 0.5-10µL	0.2-2µL 0.5-10µL	0.2-2µL 0.5-10µL	2-20µL	5-50µL 10-100µL
CAPP electronic pipettes and CAPPaero multichannel	0.5-10µL 2-20µL	0.5-10µL 2-20µL	0.5-10µL 2-20µL	0.5-10µL 2-20µL	0.5-10µL 2-20µL	0.5-10µL 2-20µL	x	5-50µL 10-100µL
Biohit eline, mline, Proline Plus	0.1-3µL 0.5-10µL	0.1-3µL 0.5-10µL	0.1-3µL 0.5-10µL	0.1-3µL 0.5-10µL	0.1-3µL 0.5-10µL	0.1-3µL 0.5-10µL	2-20µL	2-20µL 10-100µL
Brand Transferpette, Transferpette S, Transferpette Electronic	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	2-20µL	x
Eppendorf Reference, Research Plus	0.1-2.5µL 0.5-10µL	0.5-10µL	0.1-2.5µL 0.5-10µL	0.1-2.5µL 0.5-10µL	0.1-2.5µL 0.5-10µL	0.1-2.5µL 0.5-10µL	2-20µL	2-20µL 10-100µL
Finnpipette Digital	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	0.5-10µL	2-20µL	5-50µL
Gilson Pipetman	0.2-2µL 1-10µL	0.2-2µL 1-10µL	0.2-2µL 1-10µL	0.2-2µL 1-10µL	0.2-2µL 1-10µL	0.2-2µL 1-10µL	2-20µL	2-20µL 10-100µL
Rainin Classic, universal shaft (non LTS)	0.1-2µL 0.5-10µL	0.1-2µL 0.5-10µL	0.2-2µL 1-10µL	0.1-2µL 0.5-10µL	0.2-2µL 1-10µL	0.1-2µL 0.5-10µL	2-20µL	2-20µL 10-100µL
VWR, Labnet, HTL mechanical pipettes	0.1-2µL 0.5-10µL	0.1-2µL 0.5-10µL	0.2-2µL 1-10µL	0.1-2µL 0.5-10µL	0.2-2µL 1-10µL	0.1-2µL 0.5-10µL	2-20µL	2-20µL 10-100µL

EX Pell and EX PellPLUS

COMPATIBILITY CHART

For tips' compatibility with other pipette brands, please contact info@capp.dk

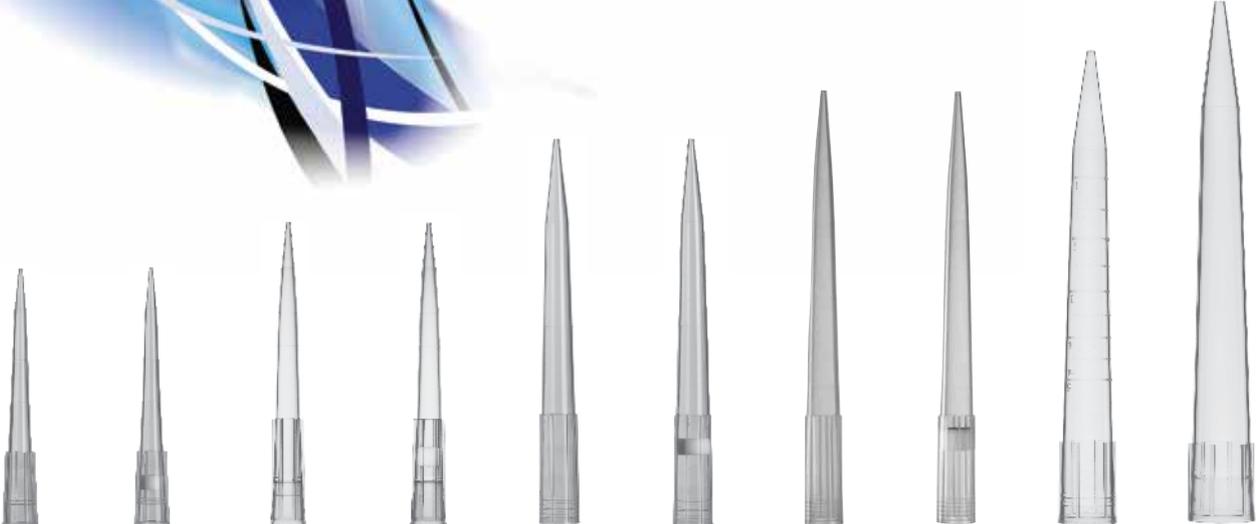

5130070C 5030070C 5030072C 4130075C 5030075C 5030080C 5030095C	5030089C 5030090C 5130090C 5131090C	5130100C 5130105C 5130110C	5030114C 5030115C	5130130C 5130132C 4130135C 5130135C 5130140C 5130155C	5130149C 5130150C 5131150C	5130120C 5130121C 5130122C	5130119C 5130123C	5130160C 5130165C	5130190C 5130195C
2-20µL 5-50µL 10-100µL 20-200µL	2-20µL 5-50µL 10-100µL 20-200µL	2-20µL 5-50µL 10-100µL 20-200µL	2-20µL 5-50µL 10-100µL 20-200µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	1-5mL	1-10mL
5-50µL 10-100µL 20-200µL	5-50µL 10-100µL 20-200µL	5-50µL 10-100µL 20-200µL 30-300µL	5-50µL 10-100µL 20-200µL 30-300µL	100-1200µL	100-1200µL	100-1200µL	100-1200µL	500-5000µL	x
2-20µL 10-100µL 20-200µL	10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	x	1-10mL
2-20µL 10-100µL 20-200µL	20-200µL	20-200µL 15-300µL	20-200µL 15-300µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	x	x
2-20µL 10-100µL 20-200µL	20-200µL	10-100µL 20-200µL 30-300µL	10-100µL 20-200µL 30-300µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	x	1-10mL
2-20µL 5-50µL 20-200µL	5-50µL 20-200µL	5-50µL 20-200µL 30-300µL	5-50µL 20-200µL 30-300µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	x	x
2-20µL 20-100µL 50-200µL	2-20µL 10-100µL 20-200µL	2-20µL 20-100µL 50-200µL	2-20µL 20-100µL 50-200µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	100-1000µL 200-1000µL	1-5mL	1-10mL
2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	1-5mL	1-10mL
2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	2-20µL 10-100µL 20-200µL	100-1000µL	100-1000µL	100-1000µL	100-1000µL	1-5mL	1-10mL

CAPP *Harmony*

COMPATIBILITY CHART

For syringes' compatibility with other pipette brands, please contact info@capp.dk



CAPP *Harmony* Basic Retips

RS-01-C	RS-03-C	RS-06-C
RS-01S-C	RS-03S-C	RS-06S-C
0.05mL 100 pcs	1.25mL 100 pcs	12.5mL 100 pcs
Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible
Not compatible	Not compatible	Not compatible
Not compatible	Not compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible
Not compatible	Not compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible
Not compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible

CAPP *Harmony* Macro Retips

RS-07-C	RS-08-C
RS-07S-C	RS-08S-C
25mL 25 pcs	50mL 25 pcs
Fully compatible	Fully compatible
Not compatible	Not compatible
Fully compatible	Fully compatible
Fully compatible	Fully compatible

CAPP Rhythm Repeater
CAPP R10 Repeater
Biohit Mechanical Stepper
eLINE Lite Dispenser
eLINE Pro Dispenser
Fisherbrand
Eppendorf Multipette Plus and M4
HTL MINILAB 201
Brand HandyStep
Brand HandyStep Electronic
Gilson Distriman / Repetman
Raining Auto Rep S
Raining Auto Rep E

CAPP *Harmony*

COMPATIBILITY CHART

For syringes' compatibility with other pipette brands, please contact info@capp.dk



CAPP *Harmony* Universal Retips

RS-11-C RS-11S-C 0.1mL 100 pcs	RS-12-C RS-12S-C 0.2mL 100 pcs	RS-02-C RS-02S-C 0.5mL 100 pcs	RS-13-C RS-13S-C 1mL 100 pcs	RS-04-C RS-04S-C 2.5mL 100 pcs	RS-05-C RS-05S-C 5mL 100 pcs	RS-14-C RS-14S-C 10mL 100 pcs
Not compatible	Not compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Not compatible	Not compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Not compatible	Not compatible	Fully compatible	Not compatible	Fully compatible	Fully compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Not compatible	Not compatible	Fully compatible	Not compatible	Fully compatible	Fully compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible	Not compatible	Fully compatible	Fully compatible	Not compatible
Not compatible	Not compatible	Not compatible	Not compatible	Not compatible	Not compatible	Not compatible
Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible	Fully compatible
Fully compatible	Fully compatible	Fully compatible	Not compatible	Fully compatible	Fully compatible	Not compatible

CONSUMABLES


CAPP Harmony

SEROLOGICAL PIPETTES

CAPP Harmony Serological Pipettes are made from transparent medical-grade polystyrene sterilized by gamma irradiation. Each lot is tested for endotoxins (C.5 Eu/MI) (ISO TO993-11) and Cytotoxicity (ISO 10993-5) and are guaranteed non-haemolytic (ISO 10993-4). Ideal for use within tissue culture applications.

Features:

- Designed for accurate and rapid fluid dispensing, these polystyrene pipettes are sterile, pyrogen-free and cotton-plugged for a variety of liquid handling applications
- The sharp, black, highly legible permanent graduations prevent ambiguity and guarantee precise reading and accurate dispensing to +1-2%
- Pipettes are supplied bulk (25 pipettes per bag) or individually wrapped in fibre-free colour-coded paper and plastic combination that is easy to open. See the ordering information below
- Each pipette comes with an effective filter barrier to prevent overflow of liquid into pipette
- Reverse graduations show the volume removed or remaining on all pipettes larger than 1mL.
- Generous negative graduations provide additional pipetting volume.
- The uniform mouth piece fits all major pipettors and is colour-coded for ease of identification

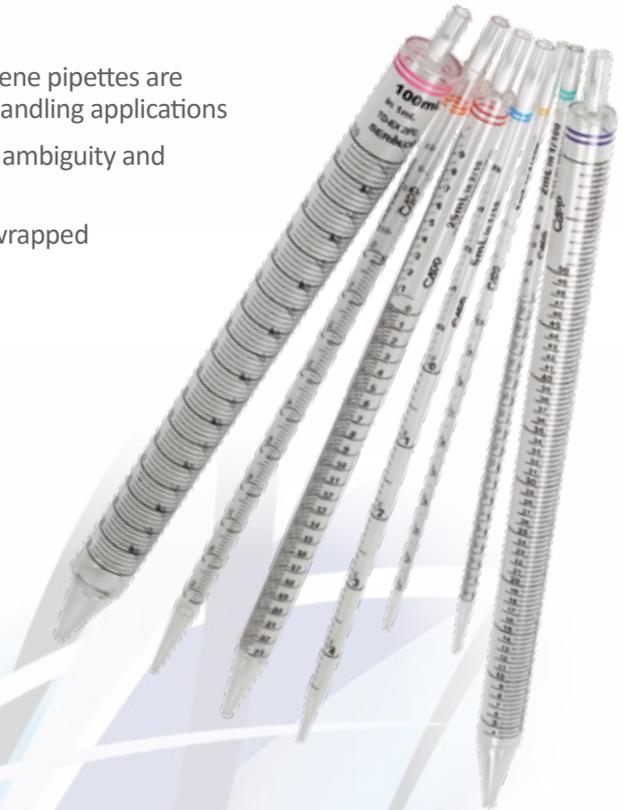

Ordering Information

Cat. No.	Description	Volume	Package	Colour
SP-1-C	CAPPHarmony Serological pipette	1mL	individually wrapped, 500 pcs.	Yellow
SPB-1-C	CAPPHarmony Serological pipette	1mL	bulk, 25 pcs./bag, 40 bags/case, (1000 pcs.)	Yellow
SP-2-C	CAPPHarmony Serological pipette	2mL	individually wrapped, 500 pcs.	Green
SPB-2-C	CAPPHarmony Serological pipette	2mL	bulk, 25 pcs./bag, 40 bags/case, (1000 pcs.)	Green
SP-5-C	CAPPHarmony Serological pipette	5mL	individually wrapped, 200 pcs.	Blue
SPB-5-C	CAPPHarmony Serological pipette	5mL	bulk, 25 pcs./bag, 20 bags/case (500 pcs.)	Blue
SP-10-C	CAPPHarmony Serological pipette	10mL	individually wrapped, 200 pcs.	Orange
SPB-10-C	CAPPHarmony Serological pipette	10mL	bulk, 25 pcs./bag, 20 bags/case (500 pcs.)	Orange
SP-25-C	CAPPHarmony Serological pipette	25mL	individually wrapped, 150 pcs.	Red
SPB-25-C	CAPPHarmony Serological pipette	25mL	bulk, 25 pcs./bag, 8 bags/case (200 pcs.)	Red
SP-50-C	CAPPHarmony Serological pipette	50mL	individually wrapped, 100 pcs.	Purple
SPB-50-C	CAPPHarmony Serological pipette	50mL	bulk, 25 pcs./bag, 4 bags/case (100 pcs.)	Purple
SP-100-C	CAPPHarmony Serological pipette	100mL	individually wrapped , 50 pcs.	Pink

BluCAPP

CENTRIFUGE TUBES

Designed to cover the everyday need for sample storage and centrifugation in the lab, the **BluCAPP Centrifuge Tubes** feature easy-to-read graduations as well as a large writing area (20x50mm).

Features:

- The leak-proof caps have large ridges to provide the optimal grip when wearing gloves
- Combined with the 3/4 turn closure, it significantly increases speed and allows one-handed operation
- Made from polypropylene, the **BluCAPP Centrifuge Tubes** are autoclavable and tested to endure up to 16.000 RCF



Ordering Information

Cat. No.	Description
5100015C	BluCAPP Centrifuge Tubes, 15mL, pre-sterile, 20x25 pcs.
5100050C	BluCAPP Centrifuge Tubes, 50mL, pre-sterile, 20x25 pcs.
5100060C	BluCAPP Centrifuge Tubes, 50mL, pre-sterile, self-standing, 20x25 pcs.

EXPell Cryo Tubes

Superior by Design™

CAPP offers a unique portfolio of cryo tubes in 5 sizes: 0.5mL, 1.0mL, 2.0mL, 4.0mL and 5.0mL.

EXPell Cryo Tubes are designed with a focus on the best user experience and convenience. Featured with single-handed QuickSeal™ closure, the external thread design allows tightening or removal with only half a turn. These are one of the only cryo tubes with external thread and star foot which can be stored in 10x10 cryo boxes, saving up to 23% storage capacity compared to conventional cryo solutions. They are also compatible with common workstations on the market.

Both the caps and the cryo tubes are made of specially formulated polypropylene, having the same coefficient of expansion and therefore enhancing the leak-proof qualities at various temperatures.

EXPell Cryo Tubes come packed in resealable stand-up pouches, saving benchtop space. They are suitable for storage in the vapour phase of liquid nitrogen.

Coloured cap inserts. Available in 6 colours: red, blue, white, purple, green and yellow. Made of PP, for easy tube recognition.

Lip seal cap design ensures that the tubes are **leak proof**

High quality graduation marks and writing area for **easy sample identification**

SuperStraight™ design fits into both 9x9 and 10x10 cryo boxes. No surface transition between the tube and the cap for **minimal risk of contamination during storage**

External thread **SuperStraight™ design** gives up to **23% extra storage capacity** when used with the 10x10 cryo boxes

QuickSeal™ design for single handed operation. Tighten or open it with only half a turn!

Red line indicating the maximum recommended filling level for freezing in liquid nitrogen in the vapour phase at -196°C

Star-foot bottom for better stability and operation when stored on selected cryo boxes



Ordering Information

EXPell Cryo Tubes

Cat. No.	Description
5040500C	Expell Cryo Tube 0,5mL, 10x100 pcs.
5041000C	Expell Cryo Tube 1,0mL, 10x100 pcs.
5042000C	Expell Cryo Tube 2,0mL, 10x100 pcs.
5044000C	Expell Cryo Tube 4,0mL, 5x100 pcs.
5045000C	Expell Cryo Tube 5,0mL, 5x100 pcs.

Coloured Cap Inserts for EXPell Cryo Tubes

Cat. No.	Description
504R000C	Red Cap Insert for Expell Cryo Tube, 1x500 pcs.
504B000C	Blue Cap Insert for Expell Cryo Tube, 1x500 pcs
504V000C	Violet Cap Insert for Expell Cryo Tube, 1x500 pcs
504G000C	Green Cap Insert for Expell Cryo Tube, 1x500 pcs
504W000C	White Cap Insert for Expell Cryo Tube, 1x500 pcs.
504Y000C	Yellow Cap Insert for Expell Cryo Tube, 1x500 pcs.

EXPell Cryo Boxes

CAPP's **EXPell Cryo Boxes** are made of highly durable polypropylene and are suitable both for freezing at -90°C and autoclaving at $+121^{\circ}\text{C}$ for 20 minutes.

EXPell Cryo Boxes are universally compatible with many other brands of cryo tubes. When used along with **EXPell Cryo Tubes**, they provide further unique, space-saving advantages, due to the unique design of **EXPell Cryo Tubes**. External thread cryo tubes are normally stored in boxes with 9 x 9 dividers, as the construction of the external thread adds an edge to the lid. The streamlined design of **EXPell Cryo Tubes** eliminates the edges, making them perfectly suitable for storage on boxes with 10x10 dividers. This increases the storage space by up to 23%, compared to storage in standard 9 x 9 boxes.

EXPell Cryo Boxes have a numerical coding on both the lid and the bottom of each box. The edges of the boxes are slanted in order to ensure proper lid positioning and eliminate any potential encoding failures. The star-foot lock at the bottom of each box well enables one-handed tube opening without taking the tube out of the box.

Features:

- Save up to 23% storage space with **EXPell Cryo Boxes** with 10 x 10 dividers
- 5 sizes of **EXPell Cryo Boxes** are available (height: 32, 40, 50, 80 and 90mm) to perfectly fit **EXPell Cryo Tubes** sizes from 0.5 to 5mL
- Quick and easy sample identification is possible thanks to the numerical coding for each tube
- Made of high quality durable polypropylene, suitable for storing at -90°C and autoclaving at $+121^{\circ}\text{C}$ for 20 minutes
- Star-foot lock at the bottom of each box well, enabling one-handed tube opening without taking the tube out of the box
- Slanted edges for easier identification and handling

Ordering Information

Cat. No.	Description
5040510C	Expell Cryobox w/10x10dv. 0.5mL, 180 pcs.
5041010C	Expell Cryobox w/10x10dv, 1mL, 105 pcs.
5042010C	Expell Cryobox w/10x10dv. 2mL, 105 pcs.
5044010C	Expell Cryobox w/10x10dv. 4mL, 90 pcs.
5045010C	Expell Cryobox w/10x10dv. 5mL, 60 pcs.



EXPell and EXPell *Secure*

MICROCENTRIFUGE TUBES

The exclusive design of **EXPell *Secure* Microcentrifuge Tubes** reduces the risk of accidental opening or popping off during intense centrifugation or heating. The hinged lid of **EXPell *Secure* MCT** provides reliable long term sample integrity, with a leak proof performance and a minimal sample loss due to evaporation during incubation or storage.

CAPP EXPell and **EXPell *Secure* MCT** are manufactured from virgin PP, out of the finest molds available.

Features:

- One-handed open/close operation
- Perfect sealing and evaporation protection
- Polished interior to prevent from protein adhesion
- High clarity for good sample visibility.

All **CAPP EXPell** and **EXPell *Secure* MCT** are DNase, RNase, Pyrogen free and withstand up to 20.000g.

EXPell *Plus Secure* Low-Retention Microcentrifuge Tubes offer a superior smooth inner surface, minimizing sample binding.

EXPell *Secure* Black Microcentrifuge Tubes:

With a special focus on processing light-sensitive samples, **CAPP** has developed **EXPell *Secure* Black Microcentrifuge Tubes**. The black tubes are available in one size (1.5mL) and come bulk packed in bags of 500pcs. The black Polypropylene compound creates a completely opaque barrier, preventing light from causing any reactions within the liquid inside the tube, making the tubes ideal for processing light sensitive samples.

EXPell *Secure* Black Microcentrifuge Tubes are a great alternative to the commonly used method of wrapping the tube in aluminum foil in order to protect the samples from light impact. **EXPell *Secure* Black Microcentrifuge Tubes** are suitable for applications requiring photo-sensitive, fluorescent or ethidium bromide probes. Unlike amber tinted tubes, they are completely opaque and protect even the most light-sensitive samples.



EXPell
Microtube
5101501C

EXPell *Secure*
Microtube
5101500C



Ordering Information

Cat. No.	Description
5100500C	Expell Microcentrifuge tubes 0.5mL, bulk, 10x1000 pcs.
5001500C	ExpellPlus Secure Microcentrifuge tubes 1.5mL, bulk, low retention, 20x500 pcs.
5101500C	Expell Secure Microcentrifuge tubes 1.5mL, bag, 20x500 pcs.
5101501C	Expell Microcentrifuge tubes 1.5mL, bag, 20x500 pcs.
5101590C	Expell Secure Microcentrifuge tubes 1.5mL, bulk, assorted colours, 20x500 pcs. (magenta, blue, yellow, green, orange)
5101550C	Expell Secure Microcentrifuge tubes 1.5mL, bulk, black, 20x500 pcs.
5102000C	Expell Secure Microcentrifuge tubes 2.0mL, bag, 16x500 pcs.
5102001C	Expell Microcentrifuge tubes 2.0mL, bag, 10x500 pcs.

EXPELL PCR

PCR TUBES & PLATES

CAPP EXPell PCR line comprises of 0.1mL and 0.2mL tubes with plug caps, strips of 8 tubes, strips, plates and optical adhesives. The V-shape bottom allows total sample recovery and the thin-walled wells of polypropylene allow a very good transmission of temperature and minimize condensation.



5100200C



5100210C



5100211C



5100212C



5100213C



5100300C



5100310C



5100311C



5100313C



5100400C

Ordering Information

For standard PCR / qPCR thermocyclers that require regular profile 0.2mL tubes

Cat. No.	Description
5100200C	ExpellPlus PCR tubes 0.2mL, low-binding, bag, 20x1000 pcs.
5100201C	Expell PCR tubes 0.2mL, bag, 20x1000 pcs.
5100210C	Expell PCR strips of 8 tubes 0.2mL, bag, 20x120 pcs.
5100211C	Expell PCR strips of 8 caps (flat), for 0.1mL and 0.2mL tubes, bag, 30x120pcs.
5100212C	Expell PCR strips of 8 tubes w/ single attached caps 0.2mL, 8x120 pcs.
5100213C	Expell PCR plate of 96 x 0.2mL, 8x 25 pcs., non-skirted
5100214C	Expell PCR plate of 96 x 0.2mL, 8x 25 pcs., frosted, sub-skirted (for ABI cyclers)
5100216C	Expell PCR plate of 96 x 0.1/0.2mL, 8x 25 pcs., clear, fully skirted
5100450C	Expell PCR Shell frame grid 96 x 0.2mL for ABI cycler, 8x24 pcs.
5100451C	Rigid shell frame grid 96 x 0.2mL for ABI cycler, 1 pc

For fast PCR / qPCR thermocyclers that require low profile 0.1mL tubes

Cat. No.	Description
5100300C	Expell PCR tubes 0.1mL, bag, 20x1000 pcs.
5100310C	Expell PCR strips of 8 tubes 0.1mL, bag, 15x120 pcs.
5100311C	Expell PCR strips of 8 tubes w/ single attached caps 0.1mL, 8x120 pcs.
5100313C	Expell PCR plate of 96 x 0.1mL, 8x 25 pcs., non-skirted
5100314C	Expell PCR plate of 96 x 0.1mL, 8x 25 pcs. white semi-skirted (for Roche LightCycler 480 and COBAS Z 480)
5100315C	Expell PCR plate of 96 x 0.1mL, 8x 25 pcs., frosted, sub-skirted (for ABI fast cyclers)
5100400C	Expell PCR Optical Disposable Adhesive, bag of 100 pcs.

CAPP *Rondo*

Benchtop Equipment

CAPP *Rondo* Benchtop Equipment is a unique line of instruments, including multiple centrifuges and mixing equipment. The elegant Danish design and the original, fresh red color bring life and contrast to any laboratory environment.

CAPP *Rondo* Benchtop Equipment have impressive user-friendly and user-safety features. Every instrument is extremely robust and designed for extended runs. You will be surprised how quiet they are - even when running at maximum speed! Additionally, they are designed to minimize the amount of benchtop space needed; having an impressively small footprint.

All products focus on increased user-safety. The electronic safety brake system prevents the lid from opening under full operation and the robust suction pads at the bottom of the equipment ensure safe and stable operation.

Motor-driven **CAPP *Rondo*** Instruments use brushless DC motors, which are maintenance-free and ideal for extended runs.

CAPP *Rondo* Benchtop Equipment are designed with the best possible user experience in focus; with large displays and intuitive interfaces which increase work comfort.

All **CAPP *Rondo* Benchtop Equipment** are covered by a 2 years' warranty.



MINI VORTEX MIXER



CAPP Rondo Mini Vortex Mixer offers the ideal solution for thorough mixing and quick vortexing, with high performance in terms of speed, reliability and safety.

Speed:

- With 4.5mm orbital motion and speeds of up to 4.500 RPM, it instantly vortexes tubes and vials up to 30mm diameter.
- Highly touch-sensitive switch ensures real-time mixing.
 - Variable speed can be adjusted simply by turning the speed control button.
- Microprocessor controlled, delivering the maximum speed even under varying load conditions.

Reliability:

- Suspension design for longer switch life.
- Two year manufacturer warranty for parts and labour.
- Low-profile with small footprint - ideal for use on laboratory benches.
- Well-balanced design, supplied with three anti-sliding feet to help the instrument to remain stable on the bench.
- Inbuilt counterbalance system creates maximum vortexing action, while minimizing noise and excessive vibration.

Safety:

- Brushless DC motor for safety, quick acceleration and low maintenance.
 - Ideal for cold rooms and incubators.
 - Maintains set speed between 4-40°C.
- Chemically resistant PC ABS molded exterior.
- Robust design with aluminum die cast base

Specifications:

Technical Data	Motion	Orbital	
	Speed Range (RPM)	Up to 4.500	
	Orbital Diameter	4.5mm	
	Operating Mode	Touch	
	Max tube diameter	30mm	
	Power Supply	Universal (90 to 230V, 50/60 Hz.)	
	Motor	Brushless DC motor	
	Max. Load Capacity	500 gm	
	Permissible ambient temperature	5 - 40 °C	
Permissible relative moisture	80%		
General Data	Material	Body	PC ABS
		Platform	Die Cast
	Dimension (WxDxH)	100x100x67mm	
	Net Weight (kg / lbs)	0.55 / 1.21	
	Power Consumption	15 W	
Protection Class (DIN EN 60529)	IP 43		

Ordering Information

Cat. No.	Description
CRV-45X	CAPPRondo Vortex Mixer 4.500 RPM w/ adjust. speed

CAPP Rondo

VORTEX MIXER

The **CAPP Rondo Vortex Mixer** is an essential piece of equipment for everyday mixing operations in any laboratory.

Thanks to the brushless DC motor, **CAPP Rondo Vortex Mixer** is maintenance-free and ideal for extended runs. Its adjustable speed operation ranges from 300 to 3.000 rpm, providing thorough mixing and quick vortexing, and enabling high performance in terms of speed, reliability and safety.

The timer setting and clear digital display enable comfortable work and full control of your vortexing process.

CAPP Rondo Vortex Mixer is chemically resistant and has a robust design, ensuring long-term use. The inbuilt counter-balance prevents it from 'walking on the bench' and the microprocessor control provides ultimate efficiency.

CAPP Rondo Vortex Mixer can be activated either by touch or via the continuous vortexing mode. It vortexes with a 4mm orbital diameter and has a maximum loading capacity of 1kg.

The unique programmable pulse mode of **CAPP Rondo Vortex Mixer** increases its mixing efficiency.

CAPP Rondo Vortex Mixer comes with a conical tube attachment. A round disk attachment with base is also available as an accessory.



Specifications:

Speed Setting	300 - 3.000 RPM
Orbital Diameter	4mm
Motor Type	Brushless DC
Digital Display	Yes
Dimensions (WxDxH)	200x225x107mm
Timer Setting	0-999 mins and continuous
Pulse Mode	Yes, Programmable
Max. Load Capacity	1kg
Weight	4kg

Ordering Information

Cat. No.	Description
CRV-30XC	CAPPRondo Vortex Mixer 3.000 RPM w/ adjust. speed, timer and continuous mode
CRV-30XC-RA	Round disc attachment with base for CRV-30XC CAPPRondo Vortex Mixer

CAPP Rondo

MICROCENTRIFUGE

CAPP Rondo Microcentrifuge has a lot more to offer compared to the basic microcentrifuges available in the market. It is available in two options, where the CR-68 is the basic version with fixed speed of 6.000 RPM/2.000g and the CR-68X is the advanced version with programmable speed of up to 6.000 RPM/2.000g and a timer function, all operated by two buttons and a digital display.

Additional features and benefits include:

- 8 slot closed rotor for quiet and powerful operation
- Quick operation by simply closing and opening the lid
- Electronic safety brake provides an immediate stop on lid opening
- Additional PCR strip rotor (2 x 8 x 0.2mL) and reduction adaptors for 0.2/0.4mL microtubes supplied along with the product
- Imbalance cut-off safety feature (CR-68X)
- Digital calibration function (CR-68X)
- Digital display of speed and timer function (CR-68X)



Ordering Information

Cat. No.	Description
CR-68	CAPPRondo Microcentrifuge 6.000 RPM/2.000g
CR-68X	CAPPRondo Microcentrifuge w/ adjustable speed and timer function, max. 6.000 RPM/2.000g

CAPP Rondo

HIGH SPEED MINI-CENTRIFUGE

CAPP Rondo Mini-centrifuge is designed to be an easy-to-use, high performance mini-centrifuge in a modern and attractive form, equipped with maintenance free drive. It accelerates up to twelve 1.5/2.0 mL mini-centrifuge tubes to a max speed of 15.000 RPM (RCF: 15.595 x g), enabling the user to process samples rapidly. Routine runs, such as spin column preparations, can be carried out with a minimum of time and effort. This compact centrifuge is also cold room and fume hood compatible.

Features and benefits include:

- Lid lock safety and imbalance detection features ensure utmost safety during operation
- Unique airflow design: ensures less heat generation and lower noise levels
- Adaptors are provided for 0.2 and 0.4/0.5mL tubes - optional 2 x 8 x 0.2mL strip rotors
- Quick and convenient setting because of intuitive simple interface
- Multiple parameters are displayed at a time on the large back-lit LCD display
- Memory for up to 99 programs - operation records are saved in Excel sheet
- Aluminum rotor with capacity of 12 tubes of 1.5/2mL and screw on metal lid
- Brushless DC motor: maintenance free and fit for extended runs
- Remote operation via laptop/computer
- Last run memory feature



Specifications:

Speed setting	500 to 15.000 RPM / Min-Sec timer 1 to 999 mins
Maximum speed RPM / RCF (g)	15.000 RPM / 15.596 x g
Display	Large Backlit LCD display
Rotor Capacity	12 place aluminum rotor with metal safety lid for 1.5/2.0mL microtubes
Motor Type	Brushless DC
Noise Level	< 62 db
Imbalance Detection	Yes
Remote Operation	Yes
Lid Lock Safety	Yes, lid opens automatically on run completion
Dimensions (W x D x H)	230 x 262 x 131mm
Accessories	Reduction Adaptors for 0.2/0.4mL Microtubes

Ordering Information

Cat. No.	Description
CR-1512	CAPPRondo Mini-centrifuge 15.000 RPM/15.595g, for 12x 1.5-2.0mL tubes
CR-15-PCR	PCR strip rotor for CAPPRondo CR-1512 w/ reduction adaptors, 1 pc.

CAPP Rondo

UNIVERSAL CENTRIFUGE

CAPP Rondo Universal Centrifuge has been developed after much research of user feedback and expectations. Occupying a minimal amount of bench space, it offers powerful and efficient centrifugation whilst maintaining a high performance over a long time of use.

The wide range of rotor options guarantee the most versatile scope of application. The extremely user-friendly interface enables you to program the device according to your specific needs. The brushless DC motor technology sustains durability and high performance over many years of use.

CAPP Rondo Universal Centrifuge operates with adjustable speeds ranging from 500 to 4.500 rpm. It has multiple rotor options - with both swing-out and fixed-angle rotors. It is equipped with a large digital display which visualises multiple parameters in the clearest, most comfortable way.

Nine acceleration and nine deceleration modes enable you to start and stop the device without disturbing fragile samples.

Additionally, **CAPP Rondo Universal Centrifuge** has an adjustable timer which can be set from 1 to 999 minutes, or the infinite centrifugation mode which is without any time limitation. User safety is increased thanks to the electronic imbalance detection feature, which is activated by an uneven loading of samples.

This centrifuge features a Lid Lock Safety Break, ensuring that the lid remains closed until the rotor has fully stopped its operation. The Emergency Lid Release enables you to open the device once any electricity supply has been removed.

To ensure the ultimate centrifugation performance, **CAPP Rondo Universal Centrifuge** offers a short spin feature for ultra-short centrifugation and pelleting. The stainless-steel chamber rotor is fully corrosion-free and extremely easy to clean.

CAPP Rondo Universal Centrifuge has an intelligently designed airflow system, which prevents any increase in sample temperature. It has a low-height design, which enables easy loading and unloading of samples.



Specifications:

Speed Range	500 - 4.500 rpm / (g) varies per rotor type
Motor Type	Brushless DC motor (BLDC)
Remote Operation	Yes, via USB
Display	Yes, large LED Display
Timer Setting	from 1 to 999 mins or infinite mode
Programmable	Yes, up to 99 programs
Imbalance Detection	Yes
Rotors (optional)	Multiple rotor options (swing-out and fixed-angle rotors)
Dimensions (WxDxH)	595 x 436 x 311mm
Weight	23kg (without rotor)

CR-43-100

4 x 100 mL swing rotor with Bio Safety Cap, RCF 3164g

**CR-43-50**

6 x 50 mL swing rotor with SS tubes, RCF 3530g

**CR-43-15**

16 x 15 mL swing rotor with SS tubes, RCF 3485g

**CR-43-PL**

2 x microplates swing rotor, RCF 2355g

**CR-43-50F**

6 x 50 mL fixed angle rotor, RCF 2644g

**CR-43-100F**

4 x 100 mL fixed angle rotor, RCF 2559g

**CR-43-15F-24**


24 x 15 mL fixed angle rotor, RCF 2852g

**CR-43-15F-16**

16 x 15 mL fixed angle rotor, RCF 3144g

**CR-43-15F-30**

30 x 15 mL fixed angle rotor, RCF 2729g

**CR-43-10**

32 x 10 mL swing rotor, RCF 3164g

Ordering Information

Cat No.	Description
CRC-432X	CAPPRondo Universal Centrifuge (up to 4 x 100 mL)
Rotor options:	
CR-43-100	4 x 100 mL swing rotor with Bio Safety Cap, RCF 3164g
CR-43-50	6 x 50 mL swing rotor with SS tubes, RCF 3530g
CR-43-15	16 x 15 mL swing rotor with SS tubes, RCF 3485g
CR-43-PL	2 x Microplates swing rotor, RCF 2355g
CR-43-100F	4 x 100 mL fixed angle rotor, RCF 2559g
CR-43-50F	6 x 50 mL fixed angle rotor, RCF 2644g
CR-43-15F-24	24 x 15 mL fixed angle rotor, RCF 2852g
CR-43-15F-16	16 x 15 mL fixed angle rotor, RCF 3144g
CR-43-15F-30	30 x 15 mL fixed angle rotor, RCF 2729g
CR-43-10	32 x 10 mL swing rotor, RCF 3164g (includes 32 x 10 mL SS tubes + 32 x 10 mL rubber adapters for tube diameter 13x length 100mm + 32 x adapters for tube dia. 13x length 75mm)

CAPP Rondo

HIGH SPEED REFRIGERATED CENTRIFUGE



CAPP Rondo High Speed Refrigerated Centrifuge

operates with the maximum speed of 17.000 RPM, corresponding to 27.237 g. It's an ideal centrifuge for molecular and cellular applications, such as ethanol precipitation, phenol extraction, NA preparation, cell collection or spin-down of temperature sensitive reaction mixtures.

CAPP Rondo High Speed Refrigerated Centrifuge

offers a maximum rotor capacity of 30 microtubes (18 microfilter tubes or 64 PCR tubes). Its operating temperature range is from -20°C to +40°C.

The samples are cooled down to the temperature of 4°C in just 5 minutes.

The chamber is rust-free and Teflon-coated.

The compressor-off function prevents from unnecessary cooling and frosting while the lid is open.

As with all CAPP Rondo instruments, the High Speed Refrigerated Centrifuge offers quiet operation, keeping the noise level at only 56 dB. The parameters can be changed upon operation unless the Key Lock Function is activated.

CAPP Rondo High Speed Refrigerated Centrifuge

offers multiple rotor options.

Specifications:

Max. RPM / Fixed angle	17.000 RPM	Program memory	100
Max. RCF / Fixed angle	27.237 x g	Parameters on display window	RPM(RCF), Operating Status, Door Open/Close, Min:Sec, Temp, (ACC), (DEC)
Max. capacity / Fixed angle	30 x 1.5 / 2.0 mL, 8 PCR strips	Display	Blue LCD
Max. capacity / Swing-out	4 x 4 x 1.5 / 2.0 mL	Rotor Identification	Automatic
Temp range (°C)	-20°C to +40°C	Imbalance cutout	Yes
FAST cool button	Yes	Safety lid lock	Yes
Time control	Pulse, timed <100 min, or continuous	Lid drop protection	Yes
Time counting range	Selectable, at set speed or from starting	CE Mark	Yes
RCF/RPM conversion	Yes	Power supply (V/Hz)	200V / 50~60Hz (110V optional)
Noise level	≤56 dB (dependent on rotor)	Power requirement (VA)	2KVA
Acc. time to max. speed	≤17 sec	Dimension (W x D x H)	310 x 620 x 265mm
Dec. time from max. speed	≤15 sec	Weight without rotor	43kg
ACC/DEC ramps	9/10		

CR-17-24

Fixed angle rotor of CR-1730R for 24 x 1.5mL / 2.0mL microtubes. 45°, Hole diameter 11.1mm, Max. height for tube fit 52mm. Supplied with O-ring sealed.

**CR-17-5**

Fixed angle rotor of CR-1730R for 12 x 5mL for screw and snap cap microtubes. 45°, Hole diameter 17mm, Max. height for tube fit 64mm. Supplied with O-ring sealed.

**CR-17-30**

Fixed angle rotor of CR-1730R for 30 x 1.5mL / 2.0mL microtubes. 45°, Hole diameter 11.1mm, Max. height for tube fit 52mm. Supplied with O-ring sealed.

**CR-17-PCR**

Fixed angle PCR-tube Rotor of CR-1730R for 64 x 0.2µL PCR tubes or 8 rows of PCR strips. 45°, Hole diameter 6.5mm, Max height for tube fit 16mm.

**CR-17-D8**

Drum Rotor of CR-1730R for 8 x 1.5mL / 2.0mL microtubes (buckets are not included) 90°, Hole diameter 11.1mm, Max. height for tube fit 50mm.

**CR-17-18**

Fixed angle rotor of CR-1730R for 18 x 1.5mL / 2.0mL microfilter tubes. 45°, Hole diameter 11.1mm, Max. height for tube fit 65mm. Supplied with O-ring sealed.

**CR-17-D16**

Drum Rotor of CR-1730R for 16 x 1.5mL / 2.0mL microtubes (buckets are not included) 90°, Hole diameter 11.1mm, Max. height for tube fit 43mm.



Ordering Information

Refrigerated Centrifuge

Cat No.	Description
CR-1730R	CAPPRondo Refrigerated Centrifuge. 17.000 RPM / 27.237g, 220V
CR-1730R-110	CAPPRondo Refrigerated Centrifuge. 17.000 RPM / 27.237g, 110V

Rotors and accessories for CR-1730R

CR-17-24	Fixed angle rotor of CR-1730R for 24 1.5mL / 2.0mL microtubes
CR-17-30	Fixed angle rotor of CR-1730R for 30 1.5mL / 2.0mL microtubes
CR-17-18	Fixed angle rotor of CR-1730R for 18 microfilter tubes
CR-17-5	Fixed angle rotor of CR-1730R for 12 x 5 mL screw and snap cap microtubes
CR-17-PCR	Fixed angle PCR-tube Rotor of CR-1730R for 64 PCR tubes or 8 rows of PCR strips
CR-17-D8	Drum Rotor of CR-1730R for 8 microtubes (buckets are not included)
CR-17-D16	Drum Rotor of CR-1730R for 16 microtubes (buckets are not included)

Buckets for the Rotors of CR-1730R

CR-17-B8	Single tube bucket Drum Rotor CR-17-D8 (total 8 buckets are required)
CR-17-B16	4-tube bucket Drum Rotor CR-17-D16 (total 4 buckets are required)

Buckets for the Rotors of CR-1730R

CR-17-02	0.2 mL adaptor of microtube rotors
CR-17-05	0.5 mL adaptor of microtube rotors

CAPP Rondo

CLINICAL CENTRIFUGE

CAPP Rondo Clinical Centrifuge is a compact and reliable low-speed centrifuge, ideal for blood centrifuge applications involving volumes below 15mL. It stands out in its category for having great features that allow a reliable performance, ease of use and safety.



Ease of use:

- Rotor capacity of up to 8 x 15mL tubes on a fixed angle rotor
 - Adaptors included to allow usage with most standard collection tubes: 5mL, 7mL, 10mL and 1.5mL / 2.0mL
- Large digital display. Timer setting of 0.5 to 30 minutes
 - Only one click to change from RPM to RCF

Reliable performance:

- Smart air flow design reduces noise
- Precise RPM setting with increments from 100 RPM and setting from 500-6.500 RPM
- Built with a long-life DC motor and a microprocessor

Safety:

- Automatic imbalance detection
- Lid lock safety: lid opens automatically after the operation is completed

Specifications:

Maximum Speed RPM / RCF (g)	6.500 RPM / 3.873g
Speed Setting	500 to 6.500 RPM (increments of 100 RPM)
Timer Setting	0.5 to 30 minutes or infinite mode
Imbalance Detection	Yes
Dimensions	260 x 244 x 205mm
Noise Level	< 60 dB
Weight	4kg
Rotors And Adaptors Included	8 x 10/15 mL, adaptors for 5 mL, 7 mL, 1.5 mL and 2 mL tubes

Ordering Information

Cat. No.	Description
CRC-658	CAPPRondo Clinical Centrifuge 6.500 RPM / 3.873g for 8 x 15 mL

CAPP Rondo

CLINICAL CENTRIFUGE

CAPP Rondo Clinical Centrifuge has a maximum speed of 4.000 RPM. Three types of rotor are available: two fixed angle rotors for 8 x 15mL or 16 x 10mL tubes and a swing-out rotor with a capacity of 6 x 10mL tubes.

Following **CAPP's** technology, the centrifuge is equipped with a robust brushless DC motor, which is ideally suited for extended runs and provides a maintenance-free, long-lasting and quiet operation.

CAPP Rondo Clinical Centrifuge offers variable speed settings with precise increments of 10 RPM, starting from 500 up to a maximum centrifugal speed of 4.000 RPM.

With user safety in focus, **CAPP Rondo Clinical Centrifuge** has been equipped with a safety lid brake, preventing the lid from fully opening until the rotor has completely stopped.

The compact design and low loading height enable easy and efficient operation. The user can program up to 99 individual protocols, and access the short spin function by a single touch on the operational panel.

CAPP Rondo Clinical Centrifuge is supplied with multiple tube adaptors for 2mL, 3mL, 4mL, 6mL and 9mL tubes.



Specifications:

Rotor Types (optional)	6x10mL (swing-out) / 8x15mL (fixed angle) / 16x10mL (fixed angle)	
Max. Speed	4.000 RPM / 2.270g (swing-out rotor)	
Speed Settings	500-4.000 RPM in steps of 10 RPM	
Timer Settings	1-999 minutes or infinite mode	
Programmable Features	Up to 99 user defined protocols	
Lid Lock Safety	Yes	
Imbalance Detection	Yes	
Dimensions (LxWxH)	415x355x173mm	
Weight	7.7kg (without rotor)	
Adaptors included	For rotor CRC-4-6S	8mL, 9mL, 10mL tube adaptor - 6 pcs. of each 6mL sleeve - 6 pcs. 2mL, 3mL, 4mL tube adaptor - 6 pcs. of each 2mL, 3mL, 4mL sleeve - 6 pcs.
	For rotor CRC-4-8	Tube spacer 2mL, 3mL, 4mL - 8 pcs. of each Tube sleeve for 6 mL - 8 pcs
	For rotor CRC-4-16	Tube sleeve for 9mL, 10mL - 16 pcs. of each Tube sleeve for 6mL - 16 pcs. Tube spacer 2mL, 3mL, 4mL - 16 pcs. of each

Ordering Information

Cat No.	Description
CRC-416X	CAPPRondo Clinical Centrifuge 4.000 RPM
CRC-4-8	Fixed angle rotor of CRC-416X for 8x15mL tubes
CRC-4-16	Fixed angle rotor of CRC-416X for 16x10mL tubes
CRC-4-6S	Swing-out rotor of CRC-416X for 6x10mL tubes

CAPPRondo Clinical Centrifuge 4.000 RPM, CRC-416X, is designed for processing blood and other clinical samples in applications like PRP, medical practitioners, pathological laboratories, as well as for routine hospital centrifuging test. In particular it is used for processing and analyzing samples from human body in in vitro diagnostic applications to ensure that in vitro diagnostic device can be used according to Directive 98/79/EC. Therefore CAPPRondo Clinical Centrifuge 4.000 RPM, CRC-416X, and its accessories being in-vitro diagnostic accessories are themselves in-vitro diagnostic medical devices within the meaning of directive 98/79/EC of the European Parliament and of the Council of 27 October 1998 on in-vitro diagnostic medical devices.

CAPP Rondo

3 D SHAKER

CAPP Rondo 3D Shaker operates at a variable speed range from 10 to 120 RPM. The brushless DC motor ensures stable, quiet and maintenance free operation, which is perfectly suited for extended runs. The three dimensional rocking and tumbling motion provides thorough homogenous mixing.

The user can save up to 9 individual protocols or use the pulse mode with Run-Pause-Run operation at a programmable time interval ranging from 30 to 99 seconds.

CAPP Rondo 3D Shaker can be programmed to run from 1 up to 999 minutes, or continuously in the infinite mode.

To assure total stability on the bench, **CAPP Rondo 3D Shaker** is equipped with non-slip rubber feet and comes with a spiked rubber mat. Optionally, a sticky pad mat can be ordered.

CAPP Rondo 3D Shaker is easy to clean and complies with Protection Class IP 21.



Specifications:

Load Capacity	5kg
Speed Range	10-120 RPM
Motor Type	BLDC (Brushless DC motor)
Movement	Tumbling 7°
Run Time	1-999 minutes or infinite
Programmable Mode	Up to 9 user defined protocols
Pulse Mode	Run-Pause-Run programmable from 30 to 99 secs.
Display	7 Segment LED
Accessories	Spiked rubber mat (included), Sticky pad mat (optional)
Plate size	350x350mm
Protection Class	IP 21

Ordering Information

Cat No.	Description
CR3-08X	CAPPRondo 3D Shaker 5kg capacity

CAPP Rondo

PLATFORM SHAKER



CAPP Rondo Platform Shaker offers a shaking mass capacity of 7.5kg. Its orbital and linear reciprocating motion along with the motor technology ensures thorough mixing and a long-life, maintenance free operation, ideal for extended runs.

The speed settings range from 50 to 300 RPM and the time can be set up from 1 to 99 hours and 59 minutes.

CAPP Rondo Platform Shaker has multiple programmable modes, such as motion direction, speed, time, dwell time, sequence and loop operation. The user can program up to 6 individual protocols, each one with additional 9 sub-protocols.

Thanks to the multiple attachment platforms, **CAPP Rondo Platform Shaker** is universally compatible with almost all commonly used vessels.

In case of a power failure, the option of Auto Power On will ensure the operational run for the remaining time after resumption.

Specifications:

Shaking Movement	Orbital (∅20mm) / Linear
Max. Loading Capacity	7.5kg
Speed Range	50-300 RPM
Motor Type	Brushless DC motor
Time Settings	0 to 99 hours and 59 minutes
Dimensions (WxDxH)	408x350x99mm
Platform Size	330x330mm
Protection Class	IP 21
Programmable Features	Up to 6 individual protocols, each with additional 9 sub-programs
Programmable Looping	YES
RS 232 Interface	Optional



CRP-U



CRP-D



CRP-C9-250



CRP-C9-500



CRP-F



CRP-CS9-250



CRP-CS9-500



CRP-CS-250

Ordering Information

Cat No.	Description
CRP-3X	CAPPRondo Platform Shaker ∅ 20mm, with linear and orbital motion, 7.5kg capacity
CRP-U	Universal Platform with Adjustable Bars (Flask capacity 9 x 250mL, 6 x 500mL)
CRP-D	Disk Attachment Base Plate with Slip Resistance Tray
CRP-C9-250	Base Plate with 9 Plastic Clamps: 9 x 250mL
CRP-C9-500	Base Plate with 9 Plastic Clamps: 9 x 500mL
CRP-F	Funnel Attachment
CRP-CS9-250	Base Plate with 9 Stainless Steel Clamps: 9 x 250mL
CRP-CS9-500	Base Plate with 9 Stainless Steel Clamps: 9 x 500mL
CRP-CS-100	Stainless Steel Clamp for 100mL Flask
CRP-CS-150	Stainless Steel Clamp for 150mL Flask
CRP-CS-250	Stainless Steel Clamp for 250mL Flask
CRP-CS-500	Stainless Steel Clamp for 500mL Flask
CRP-CS-1000	Stainless Steel Clamp for 1000mL Flask

CAPP Rondo

MAGNETIC STIRRER

The **CAPP Rondo Magnetic Stirrer** is a compact device that works at a maximum speed of 1.500 RPM. It is manufactured with a robust stainless steel top surface which resists moderate contamination of harsh chemicals. The adjustable speed and timer function can be set and monitored on a modern real-time digital display.

Not just a simple Stirrer:

- Adjustable speed and timer
- Last run memory feature
- Pulse mode works for 30 seconds in each direction, for improved mixing
- Water spill resistant – IP 65 compliant

Innovative design:

- Slim profile – only 16.5mm thick
- Touch control pad and digital display
- Flat surface for ease of cleaning
- Maintenance free

Important note: to maximize the performance of your **CAPP Rondo Magnetic Stirrer**, **CAPP** recommends that you use our original Teflon coated, 25mm high strength stirring bar. One unit is supplied with each instrument. Contact your local distributor to order more units.



Specifications:

Maximum Speed	1.500 RPM
Speed Setting	15 to 1.500 RPM (increments of 50 RPM)
Load Capacity	800mL
Recommended Stir Bar Length	25mm
Dimensions	124 x 191 x 16.5mm
Weight	600g
Pulse Function	Yes
Timer Function	1 to 99 minutes and infinite mode

Ordering Information

Cat. No.	Description
CRS-15X	CAPPRondo Magnetic Stirrer 1.500 RPM w/ 1 stirring bar

CAPP Rondo

MAGNETIC HOTPLATE STIRRER

The **CAPP Rondo Magnetic Hotplate Stirrer** has a load capacity of 10 litres and comes with a ceramic coated SS plate and a powerful motor, delivering constant speed even under varying load conditions.

CAPP Rondo Magnetic Hotplate Stirrer offers variable speed setting, ranging from 200 to 2,200 RPM, increasing in steps of 10 RPM.

It heats the samples from the ambient temperature up to 320°C and is microprocessor-controlled for stable and reliable operation. Once the plate temperature has reached 50°C, a LED indication is illuminated.

CAPP Rondo Magnetic Hotplate Stirrer is programmable in terms of both speed and time. The time setting ranges from 1 to 999 minutes, and a continuous stirring mode without any time limitation can be set up. Additionally, **CAPP Rondo Magnetic Hotplate Stirrer** has a last run memory function.

To increase user comfort, **CAPP Rondo Magnetic Hotplate Stirrer** is equipped with a large display, showing all critical parameters in a clear, visible way.

It comes with a P1000 temperature probe along with a stand. Having connected the P1000 to the stirrer, the probe temperature will appear on the display. When removing the probe, the display will switch back to its default setting, showing the plate temperature.

CAPP Rondo Magnetic Hotplate Stirrer is extremely compact, saving valuable space on your bench.



Specifications:

Max. Load Capacity	10L
Speed Setting	200 - 2.200 rpm, in steps of 10 RPM
Temp. Range	from Ambient to 320°C
Time Setting	1-999 mins and continuous
Digital Display	Yes. Shows Speed/Time/Actual/Set Temp. alternately
Safe Temp. Circuit	Yes
Plate Diameter	140 mm
Weight	1.4kg
Dimensions (WxDxH)	248x156x104mm
Protection Class	IP 21
Accessories included	CRS-21H-P and CRS-21H-S

Ordering Information

Cat No.	Description
CRS-21H	CAPPRondo Magnetic Hotplate Stirrer 2200 RPM, 320°C ceramic, 10L capacity, 220V
CRS-21H-110	CAPPRondo Magnetic Hotplate Stirrer 2200 RPM, 320°C ceramic, 10L capacity, 110V
CRS-21H-P	P1000 temperature probe for CAPPRondo CRS-21H Magnetic Hotplate Stirrer
CRS-21H-S	Stand for P1000 temperature probe CAPPRondo CRS-21H Magnetic Hotplate Stirrer

CAPP Rondo

HOTPLATE STIRRER

The **CAPP Rondo Hotplate Stirrer** offers three heating modes: rapid, gradual and accurate heating. It operates with heating temperatures ranging from ambient to 550°C.

Its plate surface is made of robust nano-crystalline glass ceramic and ensures full resistance towards liquid splash or temperature shocks.

The **CAPP Rondo Hotplate Stirrer** operates at a variable speed ranging from 200 to 2.200 RPM. The speed can be set up in intervals of 10 RPM and the time can be programmed from 1 to 999 minutes, or continuous, infinite operation.


The motor technology of the **CAPP Rondo Hotplate Stirrer** ensures constant speed under varying load weight.

The large user-friendly display provides an overview of all parameters and enables easy and comfortable operation.

With the **CAPP Rondo Hotplate Stirrer** the user can program up to 99 individual protocols as well as set up the programmable Pulse Mode from 30 to 99 seconds.

Specifications:

Speed Range	200-2.200 RPM in steps of 10 RPM
Temperature Range	From ambient to 550°C
Load Capacity	20L
Motor Type	Brushless DC motor
Top Plate Material	Nano-crystalline glass ceramic
Top Plate Dimensions	180x180mm
Time Setting	1-999 minutes or infinite
Programmable Modes	Up to 99 individual protocols
Pulse Mode	Programmable, from 30 to 99 secs.
Dimensions (WxDxH)	220x330x115mm
Weight	4.5kg
Protection Class	IP 21

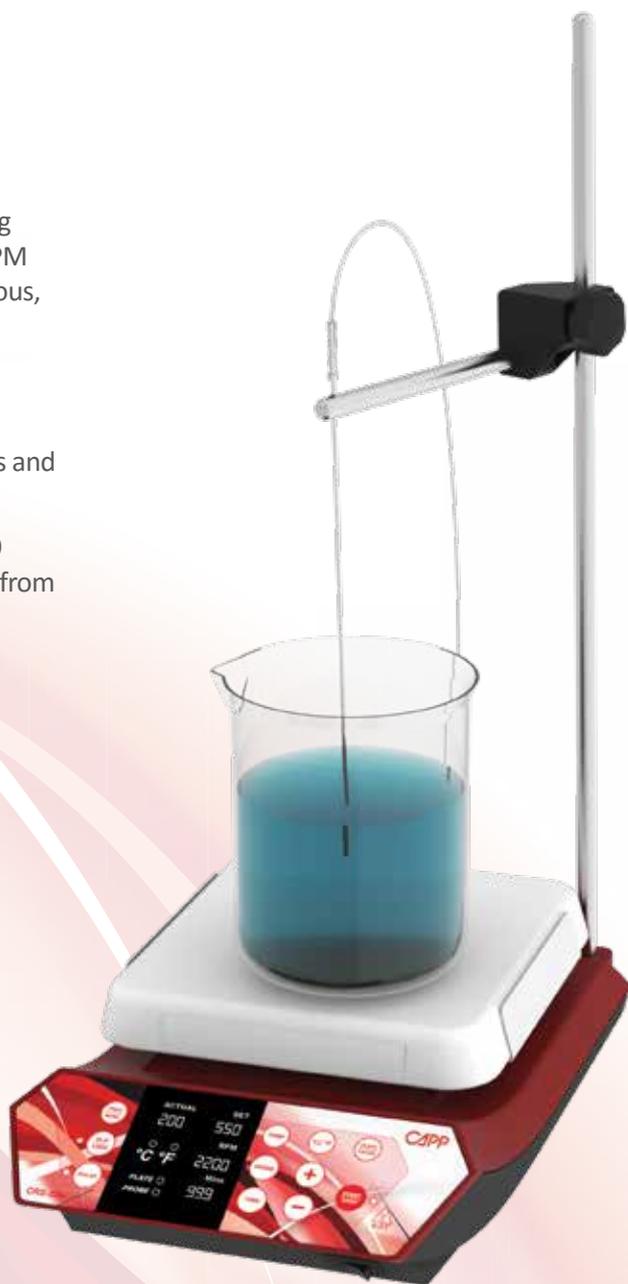

Ordering Information

Cat No.	Description
CRS-22H	CAPPRondo Hotplate Stirrer 2.200 RPM, 550°C ceramic, 20L capacity, 220V
CRS-22H-110	CAPPRondo Hotplate Stirrer 2.200 RPM, 550°C ceramic, 20L capacity, 110V
CRS-22H-P	P1000 temperature probe for CAPPRondo Hotplate Stirrer
CRS-22H-S	Stand for P1000 temperature probe CAPPRondo Hotplate Stirrer

CAPP Rondo

TUBE ROLLER

CAPP Rondo Tube Roller ensures efficient mixing of blood samples, viscous substances and liquid-solid suspensions. The programmable pulse mode feature with Run-Pause-Run motion and variable time setting from 30 to 99 seconds, give the user additional flexibility and improve the mixing process.

Apart from the rolling motion, an additional rocking movement has been applied to the rollers to ensure throughout optimal mixing. Equipped with a brushless DC motor, **CAPP Rondo Tube Roller** provides quiet and maintenance free operation, highly suitable for extended runs.

CAPP Rondo Tube Roller can accommodate up to 15 blood tubes of 7mL. The user interface panel is highly intuitive and displays both the time and speed. **CAPP Rondo Tube Roller** operates at speed ranging from 10 up to 80 RPM. The user can program up to 9 customized protocols.

With an increased user comfort and a low contamination risk in focus, **CAPP Rondo Tube Roller** operates with easily removable and autoclavable rollers. The stackable design and relatively small footprint will optimize your bench space. **CAPP Rondo Tube Roller** is also suitable for use in incubators in temperatures up to 40°C and humidity up to 80%.



Specifications:

Motor Type	Brushless DC motor
Motion	Rocking and rolling
Number Of Tubes	up to 15 x 7mL blood tubes
Speed Range	10 to 80 RPM
Time Range	1 to 99 mins
Programmable Range	9 user-defined programs
Operation Type	Continuous and timed operation
Removable Rollers	Yes, tool free removal and fitment
Pulse Mode	Yes (Run-Pause-Run mode)
Tilt Angle	+/-3°
Protection Class	IP21
Weight	6kg
Load Capacity	2kg
Dimensions (W X D X H)	502mm x 92.5mm x 301mm
Warranty	2 years


Ordering Information

Cat. No. Description

CRR-08X	CAPPRondo Tube Roller 80 RPM
---------	------------------------------

CAPP Rondo

TUBE ROTATOR

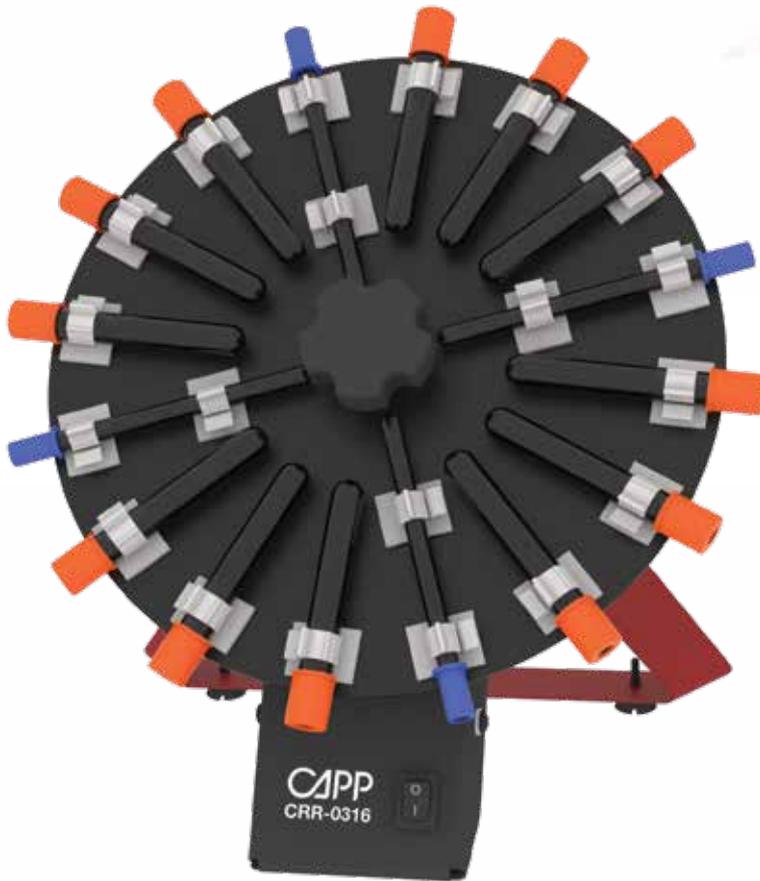

CAPP Rondo Tube Rotator has a strong, metal design which, along with the rubber feet, ensures its total stability during operation. The compact design uses a minimum amount of benchtop space.

The gentle but effective mixing occurs at a fixed speed of 30 RPM with an accuracy of +/- 2RPM.

CAPP Rondo Tube Rotator has a maximum capacity of 16 tubes, consisting of 4 ESR and 12 blood collection tubes. Its maximum operational weight capacity is 1.5kg. The disc plate is fixed at an angle of 38 degrees and is easily removed for cleaning or replacement.

CAPP Rondo Tube Rotator operates silently in the continuous mode.

Specifications:

Max Capacity	16 Tubes (4 ESR Tubes and 12 Blood Collection Tubes)
Motor Type	AC Synchronous
Speed	Fixed Speed of 30 RPM
Operation Mode	Continuous / Infinite
Speed Accuracy	+/- 2 RPM
Angle Of Disc Plate	Fixed angle of 38 degrees
Noise Level	Noiseless operation
Load Capacity	1.5kg
Dimensions	278x183x252mm
Protection Class	IP 21

Ordering Information

Cat No.	Description
CRR-0316	CAPPRondo Tube Rotator for 16 blood tubes
CRR-0316-110	CAPPRondo Tube Rotator for 16 blood tubes, 110V

CAPP Rondo



SINGLE PLATE SHAKER

The **CAPP Rondo Plate Shaker** is an ideal choice of microplate shaker for any test environment. With a tiny footprint, as small as the 96 plate size, the shaker is microprocessor-controlled for higher accuracy. The inbuilt counterbalance ensures a stable, quiet and long life operation.

Highlights:

- Comes with interchangeable clamps that provide universal fitting for different microplates
- Provided with an accessory tube platform to accommodate 20 microtubes of 1.5/2mL
- With a wide speed setting range from 300 to 1.800 RPM and orbital motion of 2mm (1mm radius), the **CAPP Rondo Plate Shaker** can perform numerous applications including PCR, ELISA, enzyme immunoassays, protein synthesis and pharmaceutical profiling
- Vortexing motion thoroughly mixes each well
- Can be used inside cold rooms or fume hoods (up to 40°C)

Specifications:

Speed Setting	300 to 1.800 RPM
Digital Display	Yes
Shaking radius	1mm
Motor Type	Brushless DC
Load Capacity	2kg
Inbuilt Counterbalance	Yes
Power Supply	Universal (100-240V, 50/60 Hz.)
Dimensions (W x D x H)	127 x 85 x 86mm
Weight	1.36kg
Accessories	Replaceable clamps to use different types of standard microplates

Ordering Information

Cat. No.	Description
CRP-18X	CAPPRondo plate shaker, 300 to 1.800 RPM

CAPP Rondo

4-PLACE PLATE SHAKER

CAPP Rondo 4-Place Plate Shaker is the ideal choice for thorough, simultaneous mixing in up to 4 individual microplates of different types.

The 3mm orbital motion movement guarantees the ultimate mixing performance, and the brushless DC motor ensures long and maintenance free operation, making **CAPP Rondo 4-Place Plate Shaker** the ideal device for extended runs.

Features and Benefits Include:

- Speed range from 200 to 1.200 RPM
- Compatible with all commonly used skirted microplates
- Pulse mode for continuous mixing in clockwise and counterclockwise directions from 30 to 90 seconds
- Rubber O-rings ensuring an ultimate grip for all 4 plates
- Digital display which gives the user an overview of the speed and time settings
- Small and compact design which requires minimum benchtop space
- Effortless loading and unloading and easy access to all 4 plates
- Last run memory feature
- Extremely easy to clean and maintain



Specifications:

Motor Type	BLDC motor
Orbital Motion	3mm
Number of Plates	Up to 4
Variable Speed	200 RPM to 1.200 RPM
Run Time	1 to 999 mins and infinity mode
Pulse Mode	Yes, Programmable (30 to 90 seconds)
Weight	5.4kg
Maximum Volume	4 x 384 x 60µL
Inbuilt Counterbalance	Yes
Dimensions (L x W x H)	343 x 88 x 195mm
Digital Display	Yes
Input Voltage	24V
Attachments	Acc. All standard Skirted Microplates

Ordering Information

Cat No.	Description
CRP-412X	CAPPRondo 4-Place Plate Shaker 1.200 RPM

CAPP Wash

MICROPLATE WASHER

Compact, Inexpensive and Made For Small Scale Work!

Whether you work in a research or in a clinical laboratory, the compact **CAPP Wash** Microplate Washer is the ideal washing tool for small scale immuno assays. Fitting into even the tightest budget, **CAPP Wash** is a perfect alternative to dependence on department washers for washing microplates and strips.



Ordering Information

Cat. No.	Description
W-8	CAPPWash 8 channel
W-12	CAPPWash 12 channel
W-16	CAPPWash 16 channel
W-8KIT-115V	CAPPWash Kit including W-8, WP-115V, WB-1, WB-3, WB-4, and W-1000 (3 meters)
W-12KIT-230V	CAPPWash Kit including W-12, WP-230V, WB-1, WB-3, WB-4, and W-1000 (3 meters)

Features:

- No programming required
- No electrical wiring connection
- Just a washer that performs uniformly and efficiently every time!
- Produced from high-grade stainless steel and polypropylene, the washer is fully autoclavable as well as highly resistant to aggressive chemicals.
- Unique Two-in-One Design: Each tube consists of an inner tube that releases the distilled water washing solution into the wells for rinsing while the outer tube vacuums away the liquid upon completion of the washing procedure.
- Washing is Simple: Simply lower the tubes into the well, then push the knob to fill and release the knob to empty. Now repeat for the desired amount of washings and move on to the next row. It's that simple!
- Matches all well types: The washer can be set to the desired depth very easily by simply adjusting the two finger screws found on either side of the tubes.
- The **CAPP Wash** is available in 8-channel, 12-channel and 16-channel versions, as well as a 6-channel **Tube Wash** manual washer for 12x75mm test tubes.
- The vacuum pump is available for 115V and 230V connections.
- All components included in the kits can also be purchased individually.





CAPP

Uthleber Weg 14
99734 Nordhausen
Germany
Tel. +49 (0) 3631 65242-0
Fax. +49 (0) 3631 65242-90
info@capp.dk
www.capp.dk



Distributed by:

