


WIRE HOOKS

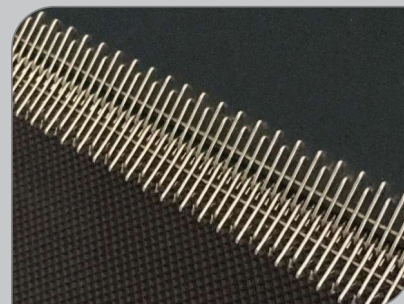

Features and Benefits:

- Stainless steel material.
- Quick, economical installation.
- Low-profile fastener.
- Double-staggered-grip pattern that doesn't degrade the integrity of the belt carcass.
- Operates quietly and interfaces seamlessly with conveyor components.

Installation Options:

- MA01-75 Roller Lacer–Lightweight, portable installation tools which gently and precisely roll the hooks into the belt for a low-profile splice. The length of the tool is 75cms.
- MA04-20 Vise Lacer – Works with a vise. Length of the tool is 20cms.

Options:

- Wide variety of wire diameters, leg and point lengths.

Packaging:

- Fasteners are shipped inside carton boxes as 5 sets/box. Connecting pins are included in the boxes.

Applications:

- Depending on their size wire hooks can be used with laundry belts, ligh-duty PVC belts, filter cloth, filter belts, heavy-duty PVC belts, rubber conveyor belts, heavy-duty conveyor belts.
- For belts up to 10 mm (25/64") thick and minimum pulley diameters 24mm.

WIRE HOOKS SELECTION CHART

Fastener Code	Material	Wire Diameter		Length	Suitable Belt Thickness		Applications
		mm	inch		mm	inch	
TR00x05	SS 316Q	0,6	0.025"	5cm	0.5 - 2.2	1/48"-3/32"	Laundry Belts
TR00x10	SS 316Q	0,6	0.025"	10cm	0.5 - 2.2	1/48"-3/32"	
TR01-Y	SS 304Q	1.0	0.040"	30cm	1.5 - 3.0	1/16" - 1/8"	PVC / Thin Belts / Food Industry
TR01-YU	SS 316Q	1.0	0.040"	30cm	1.5 - 3.0	1/16" - 1/8"	
TR01-DU	SS 316Q	0.8 x 1.0	0.032" x 0.040"	30cm	1.0 - 2.5	1/24"-3/32"	
TR02-Y	SS 304Q	1.4	0.054"	30cm	3.0 - 4.0	1/8" - 5/32"	Filter Cloth/Filter Belts
TR03-Y	SS 304Q	1.4	0.054"	30cm	4.0 - 5.5	5/32"-7/32"	Heavy Industry Belts / PVC
TR04-Y	SS 304Q	1.4	0.054"	30cm	5.0 - 6.5	1/5"-1/4"	Rubber Conveyor Belts
TR05-Y	SS 304Q	1.4	0.054"	30cm	6.0 - 8.0	15/64" - 5/16"	Heavy-Duty Belts/ Rubber Belts
TR06-Y	SS 304Q	1.4	0.054"	30cm	8.0 - 10.0	5/16" - 25/64"	

You can watch the installation video of this fastener from www.selflex.com