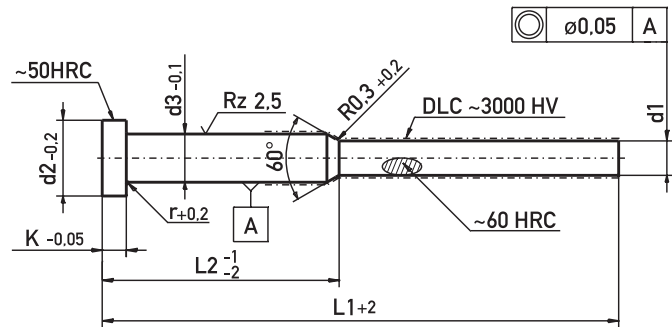


**AUF EINEN BLICK**

- ▶ Schichtdicke ~ 1,5µ
- ▶ Reibungswert ~ 0,1-0,15
- ▶ Geeignet für Trockenlauf

AT A GLANCE

- ▶ Layer thickness ~ 1,5µ
- ▶ Coefficient of friction ~ 0,1-0,15
- ▶ Suitable for dry run

~ 1.3343 + DLC, ~ DIN 1530-2

r	K	d2	d3	d1	L1													
					63	80	100	100	125	150	160	160	200	200	250	250	275	315
					L2													
r	K	d2	d3	d1	25	35	35	50	50	50	62	75	75	90	100	112	125	160
					16,20	16,60		18,10	19,50	20,10		20,10		23,10	25,40			
0,2	2	4	2	0,5	16,20	16,60		18,10	19,50	20,10		20,10		23,10	25,40			
0,2	2	4	2	0,6	16,20	16,60	18,40	18,10	19,50	20,10	20,80	20,10		23,10	25,40			
0,2	2	4	2	0,7	16,20	16,60	18,40	18,10	19,50	20,10	20,80	20,10		23,10	25,40			
0,2	2	4	2	0,8	16,20	16,60	18,40	18,10	19,50	20,10	20,80	20,10	21,50	21,50	23,70	23,70	29,00	31,60
0,2	2	4	2	0,9	16,20	16,60	18,40	18,10	19,50	20,10	20,80	20,10	21,50	21,50	23,70			
0,2	2	4	2	1	15,10	15,40	17,50	17,10	18,20	18,90	19,50	18,90	21,20	21,20	23,50	23,50	28,80	31,30
0,2	2	4	2	1,1	15,10		17,50	17,10	18,20	18,90	19,50	18,90	21,20	21,20	23,50		28,80	31,30
0,2	2	4	2	1,2	15,10	15,40	17,50	17,10	18,20	18,90	19,50	18,90	21,20	21,20	23,50	23,50	28,80	31,30
0,2	2	4	2	1,3	15,10	15,40	17,50	17,10	18,20	18,90	19,50	18,90	21,20	21,20	23,50		28,80	
0,2	2	4	2	1,4		15,40	17,50	17,10	18,20	18,90	19,50	18,90	21,20	21,20	23,50		28,80	
0,3	3	6	3	1,5	16,30	16,70	18,80	18,30	19,60	20,30	21,00	20,30	23,00	23,00	24,40	24,40	30,00	32,70
0,3	3	6	3	1,6		16,70		18,30	19,60	20,30	21,00	20,30	23,00	23,00	24,40		30,00	
0,3	3	6	3	1,7		16,70		18,30	19,60	20,30		20,30	23,00		24,40			
0,3	3	6	3	1,8				18,30	19,60	20,30	21,00	20,30	23,00	23,00	24,40		30,00	
0,3	3	6	3	2		15,40	17,50	17,10	18,20	20,00	20,50	20,00	22,00	22,00	23,80	23,80	29,10	31,90
0,3	3	6	3	2,1					18,20	20,00		20,00	22,00		23,80			
0,3	3	6	3	2,2		15,40			18,20	20,00		20,00	22,00		23,80			31,90
0,3	3	6	3	2,4						20,00			22,00		23,80			31,90
0,3	3	6	3	2,5				16,50	17,60	19,20	19,80	19,20	21,30	21,30	22,80		28,00	30,60

€/1

36599/0,5-63-25