

Contents

	Model		Volume litre/min	Head m	Page
1	Immersion Pumps				
1.1	DV08 ~ 25	1 / 8 ~ 1 / 4 HP	35 ~ 90	5 ~ 10	2
1.2	DV50 ~ 100	1 / 2 ~ 1 HP	200 ~ 260	12 ~ 20	3
2	Vertical Multistage Immersion Pumps				
2.1	DVM2T ~ 5T	3 / 4 ~ 1_1 / 2 HP	150 ~ 170	25 ~ 70	4
3	Self Priming Pumps				
3.1	DS08 ~ 25	1 / 8 ~ 1 / 4 HP	35 ~ 90	5 ~ 10	5
3.2	DS50 ~ 100	1 / 2 ~ 1 HP	100 ~ 200	11 ~ 18	6
4	Water Container				
4.1	DWV08 ~ 25	1 / 8 ~ 1 / 4 HP	capacity 15 ~ 45 litre		7

DV 浸水式泵浦 (Immersion pump)

適用於車床, 銑床及多種加工工具機, 大型工作母機沖屑, 安裝容易, 操作簡單。

DV 系列亦提供印刷用油墨泵浦, 適用於大型印刷機台, 多種創新設計可供選擇。

DVM 立式多層泵浦 (Vertical Multi-stage coolant pump)

適用於深孔加工, 泵浦本體採用鑄鐵設計, 可提供大流量與高揚程, 使用精密陶磁機械軸封, 工作壽命持久。

DS 自吸式泵浦 (Self-priming pump)

針對特殊水箱設計與工作環境限制, 使用精密陶磁機械軸封, 適用於潤滑油循環, 或配合過濾系統, 提供工具機切削液。

DWV 水箱零組件 (Water Container)

水箱零件包括冷卻泵浦與水箱, 管路和磁鐵座可立即使用, 日常維護與清鐵屑清理皆十分容易。



Application

Boring, cooling, grinding, milling, turning, transferring

Liquid




Water
 Cooling emulsions
 Cooling / cutting oils
 Low / medium viscosity lubrication oils

Construction

Cover	cast iron
Pump body	cast iron
Impeller	engineering plastic
Shaft	steel

Option

Impeller	Aluminum
Shaft	stainless steel

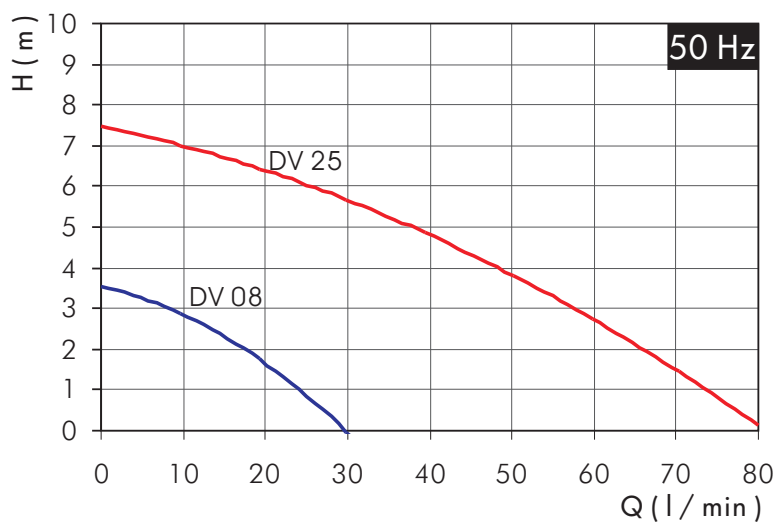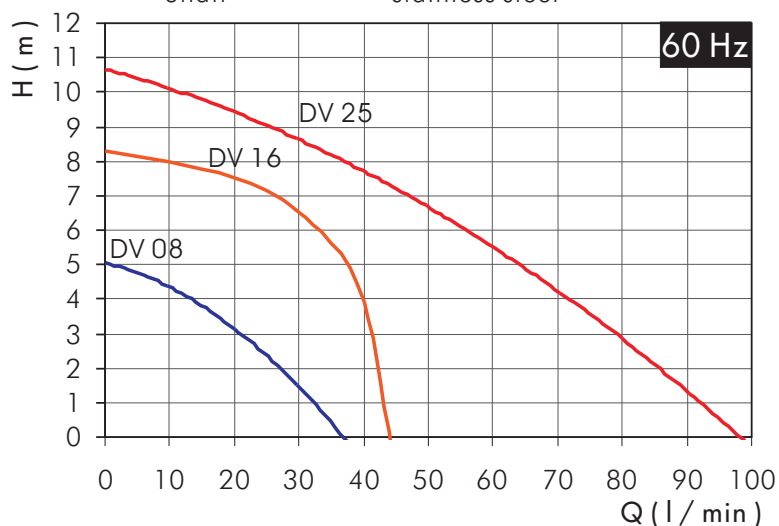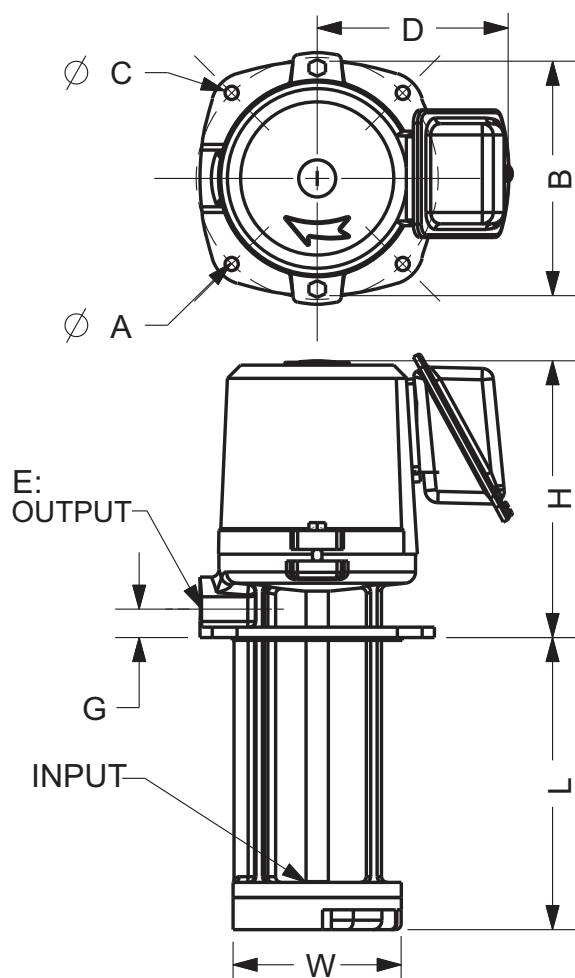

Type	Power HP	A mm	B mm	C mm	D mm	E PT	G mm	H mm	W mm	L mm	Weight kg
DV08	1/8	128	128	7	105	3/8" / 1/2"	18	150	90	100	5.3
						3/8" / 1/2"				130	5.4
						3/8" / 1/2"				150	5.6
						3/8" / 1/2"				180	5.7
						1/2"				210	6.2
DV16	1/6	128	128	7	105	1/2"	18	150	100	150	6.7
						1/2"				210	6.9
DV25	1/4	158	165	8	110	1/2" / 3/4"	24	180	120	120	10.1
						1/2" / 3/4"				160	10.8
						1/2" / 3/4"				180	10.5
						1/2" / 3/4"				200	10.9
						1/2" / 3/4"				240	12.2
						1/2" / 3/4"				270	12.5
						1/2" / 3/4"				320	13.1

Application




Boring, cooling, grinding, milling, turning, transferring, pressuring, washing

Liquid

Water
Cooling emulsions
Cooling / cutting oils
Low / medium viscosity lubrication oils

Construction

Cover	cast iron
Pump body	cast iron
Impeller	Aluminum
Shaft	steel

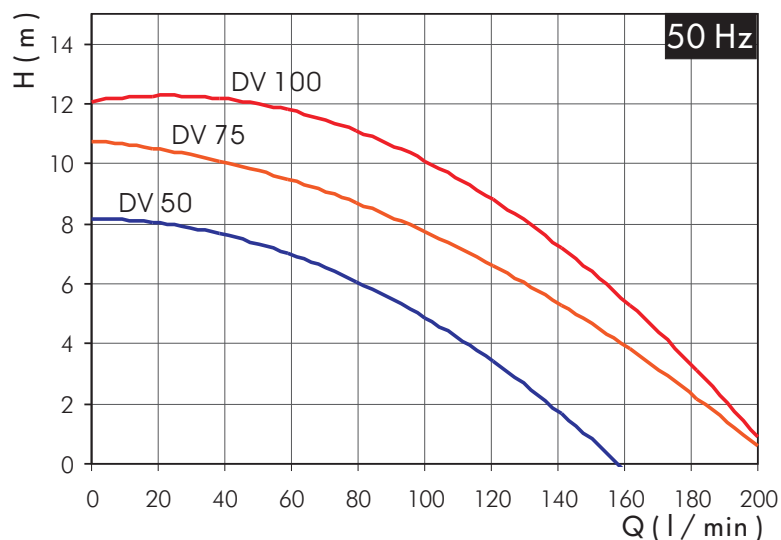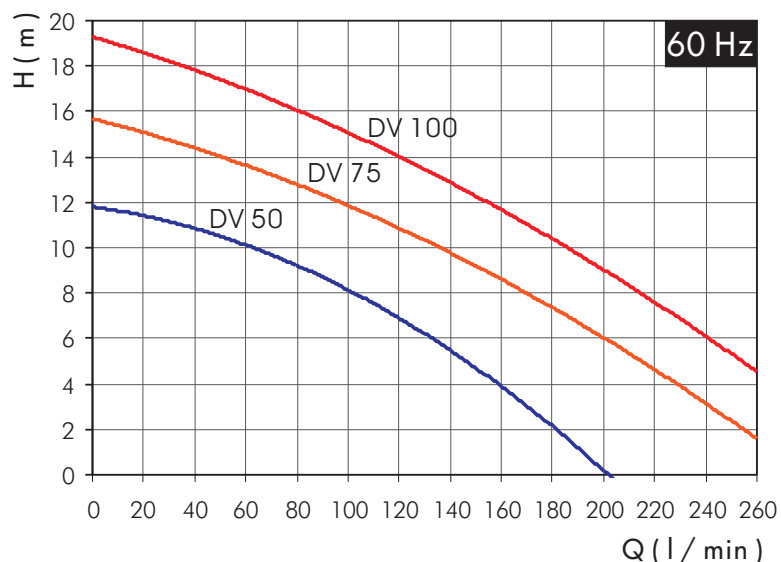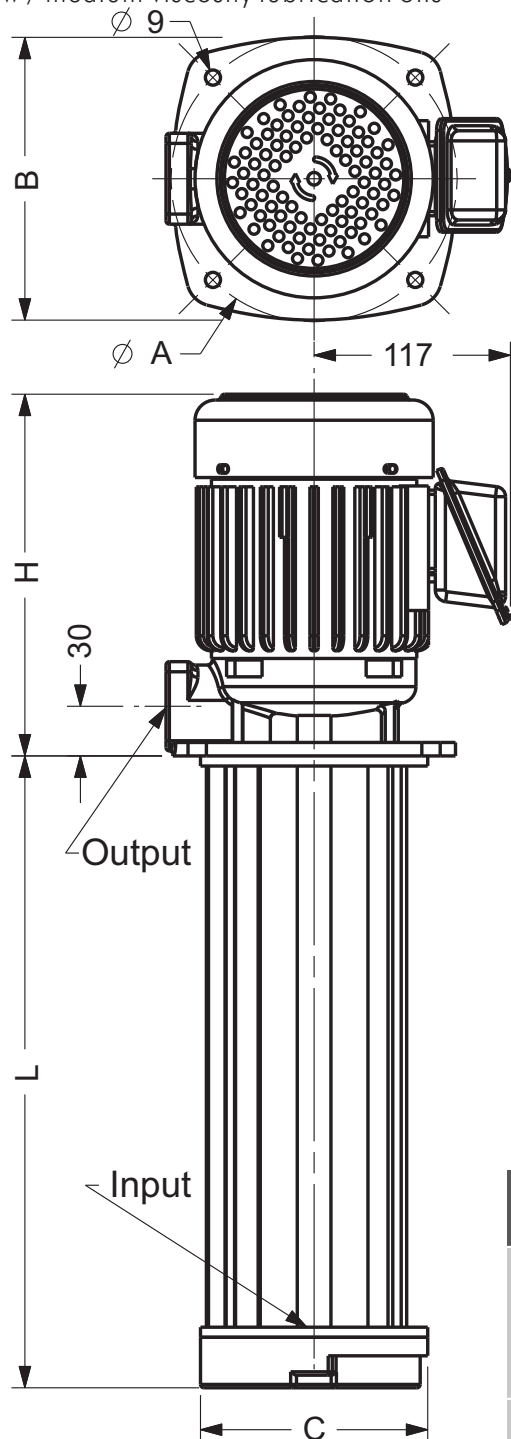

Type	Power HP	A mm	B mm	C mm	D PT	H mm	L mm	Weight kg
DV50	1/2	170	168	135	3/4" / 1"	215	180	14.5
					3/4" / 1"		250	14.5
					3/4" / 1"		290	15.6
					3/4" / 1"		380	16.6
DV75	3/4	185	186	150	1"	230	180	16.1
					1"		250	16.6
					1"		280	17.3
DV100	1	185	186	150	1"	245	180	17.5
					1"		250	18.0
					1"		280	18.7
					1"		380	22.0
					1"		550	24.0

Application

Boring, cooling, grinding, milling, turning, transferring, pressuring, washing




The pump is designed for central coolant supplies and CNC machining centres, especially with internally cooled tools.

Liquid

Water, cooling emulsions, cooling / cutting oils
Low / medium viscosity lubrication oils

Construction

Motor housing	Aluminum
Pump body	cast iron
Impeller	stainless steel
Shaft	steel
Mechanical seal	graphite based

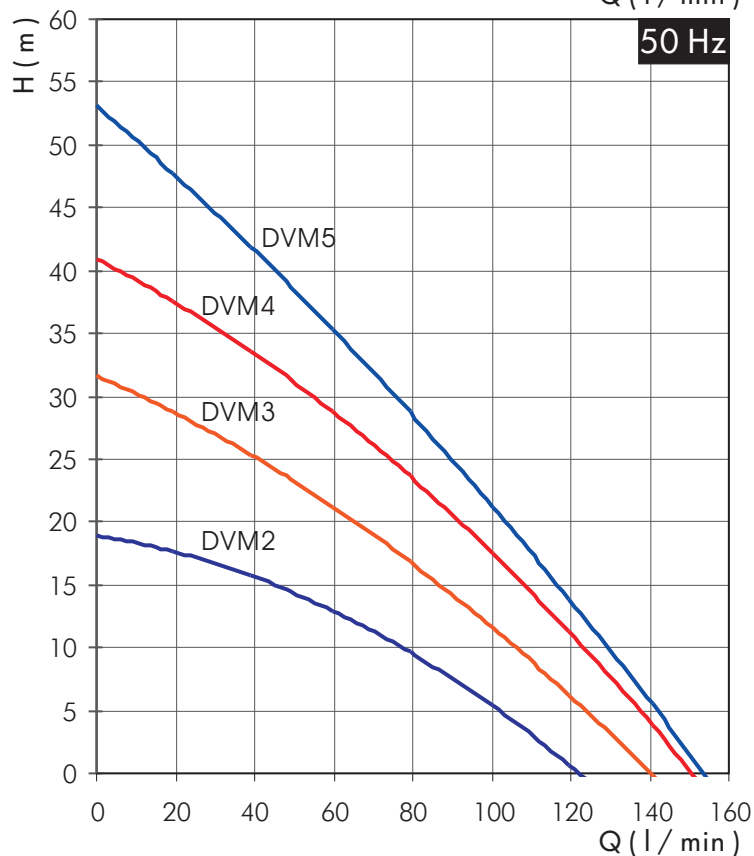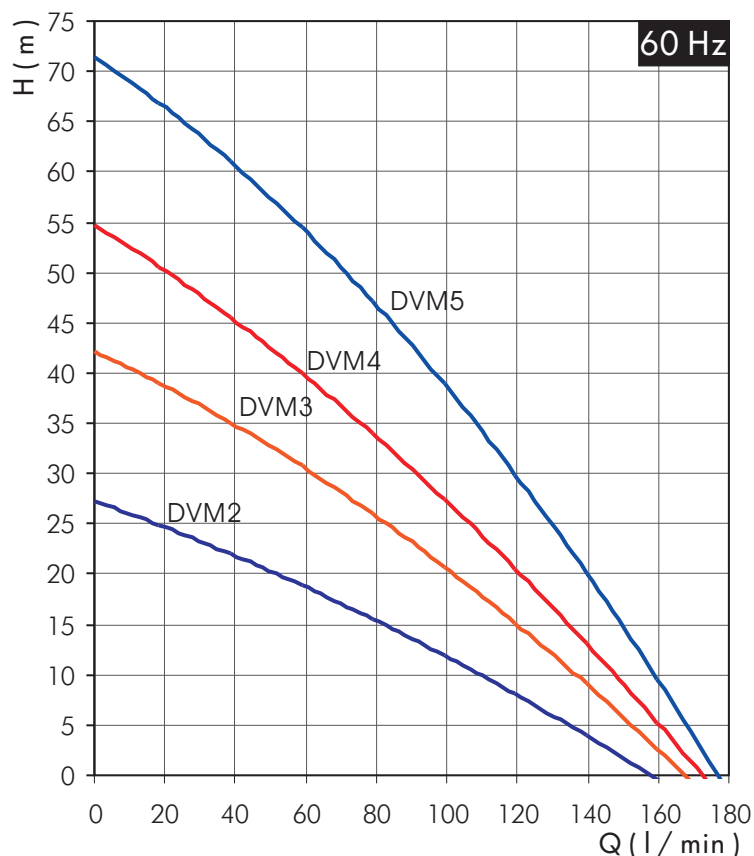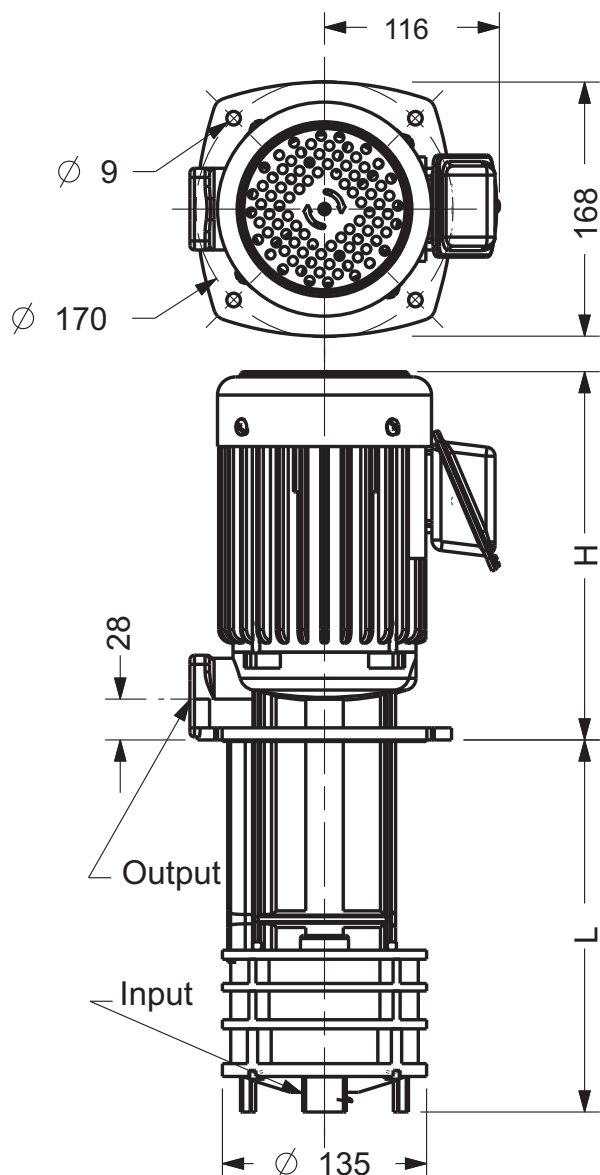

Type	Power HP	H mm	Output PT	L mm	Weight kg
DVM2	3/4	230	3/4" / 1"	130	13.6
				180	14.6
				230	14.9
				250	15.5
DVM3	1	245	3/4" / 1"	160	15.8
				200	16.8
				250	17.6
DVM4	1 1/4	265	3/4" / 1"	180	18.1
				230	19.3
DVM5	1 1/2	265	3/4" / 1"	210	19.6

Application

Boring, cooling, milling, turning, transferring, pressuring, washing

DS series pumps are designed to handle coolants and other liquids containing rust preventatives.

Liquid

Water, cooling emulsions, cooling / cutting oils
Low / medium viscosity lubrication oils





Construction

Motor housing	cast iron
Pump body	cast iron
Impeller	engineering plastic
Shaft	steel
Mechanical seal	graphite based

Option

Impeller	Aluminum
----------	----------

Type	Power HP	A mm	B mm	C mm	D mm	F PT	G mm	H mm	Weight kg
DS08	1/8	140	140	7	105	3/8" / 1/2"	45	180	5.6
DS25	1/4	185	170	8	110	1/2" / 3/4"	65	220	11.2

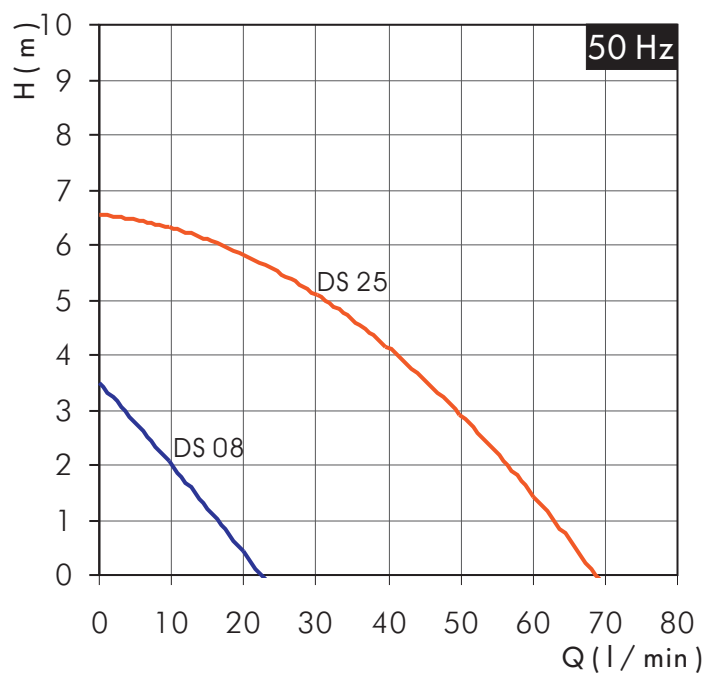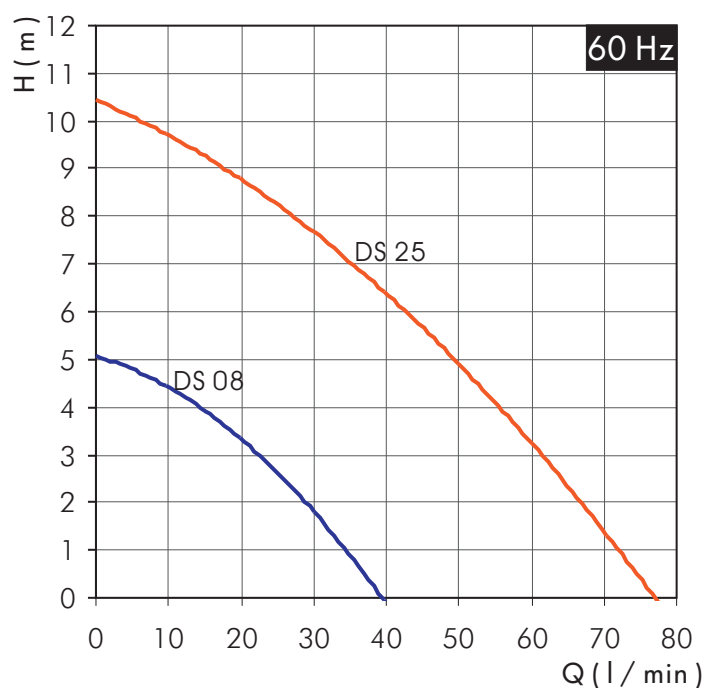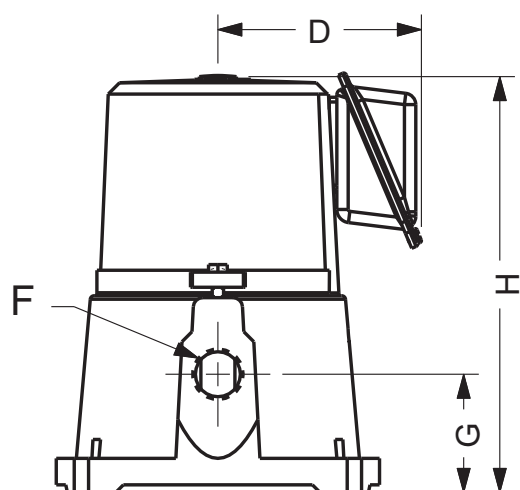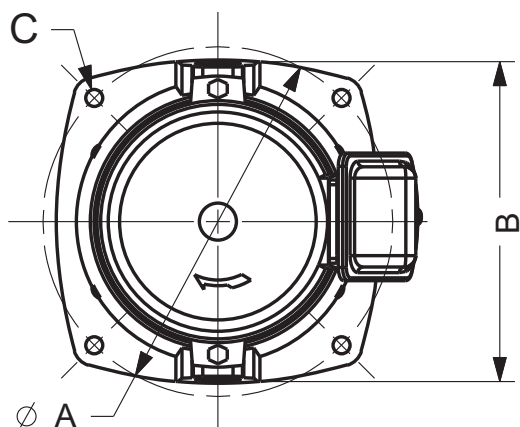

Application

Boring, cooling, milling, turning, transferring, pressuring, washing

DS series pumps are designed to handle coolants and other liquids containing rust preventatives.




Liquid

Water, cooling emulsions, cooling / cutting oils
Low / medium viscosity lubrication oils

Construction

Motor housing	cast iron
Pump body	cast iron
Impeller	aluminum
Shaft	steel
Mechanical seal	graphite based

Type	Power HP	A mm	B mm	F PT	G mm	H mm	Weight kg
DS50	1/2	215	195	3/4" / 1"	70	280	13.4
DS75	3/4	220	200	1"	80	300	14.2
DS100	1	220	200	1"	80	300	15.6

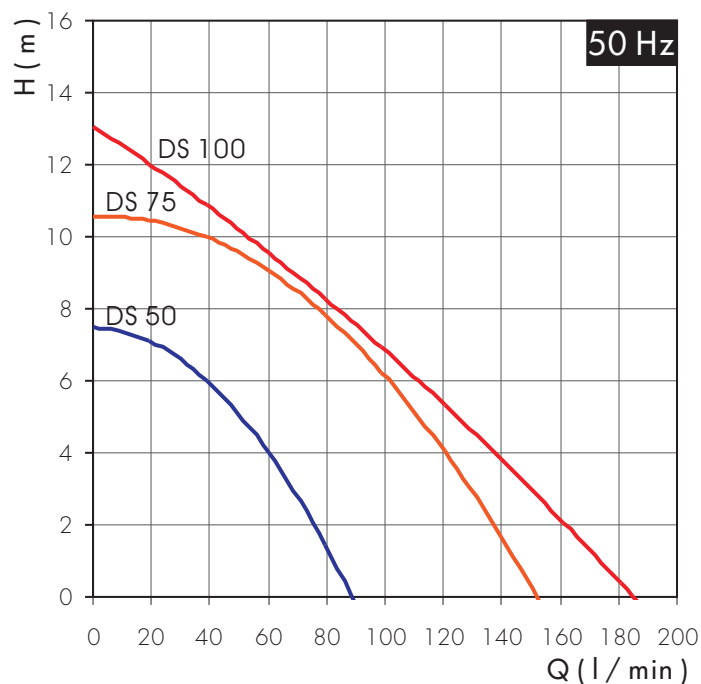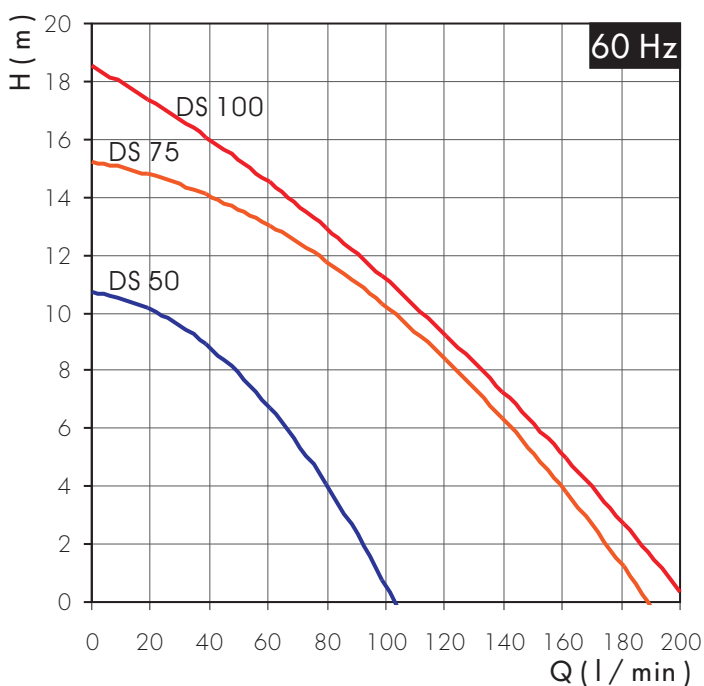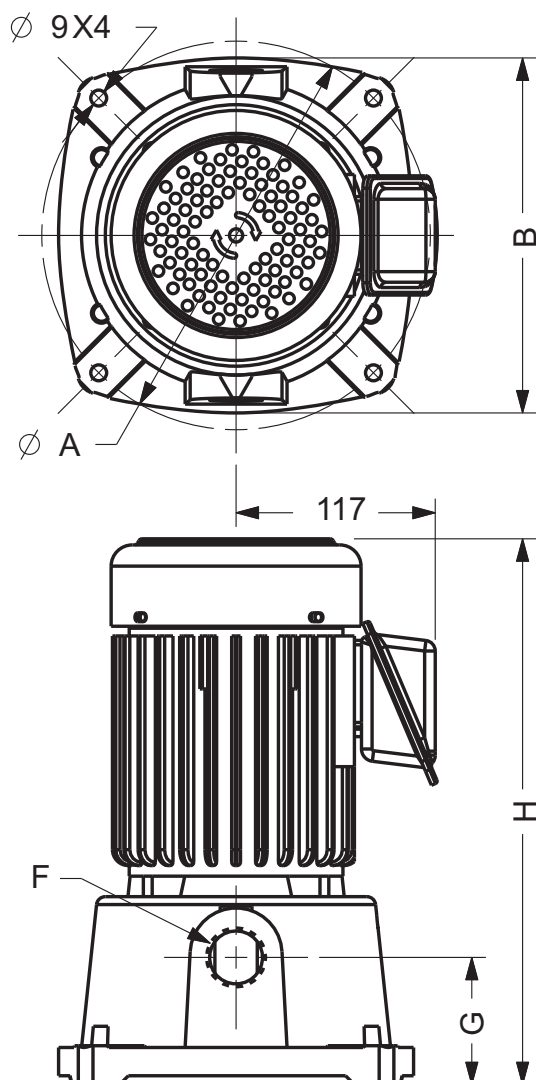

Application

Boring, cooling, grinding, milling, turning, transferring, pressuring, washing

Liquid


Water
Cooling emulsions
Cooling / cutting oils
Low / medium viscosity lubrication oils

Construction

Transferring pipe please request
Water-container iron

Please contact us as you need the latest information.

Type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Volume litre	Weight kg
DWV08	350	190	260	102	102	324	360	15	10.6
DWV25	400	230	400	150	100	500	600	45	29.6

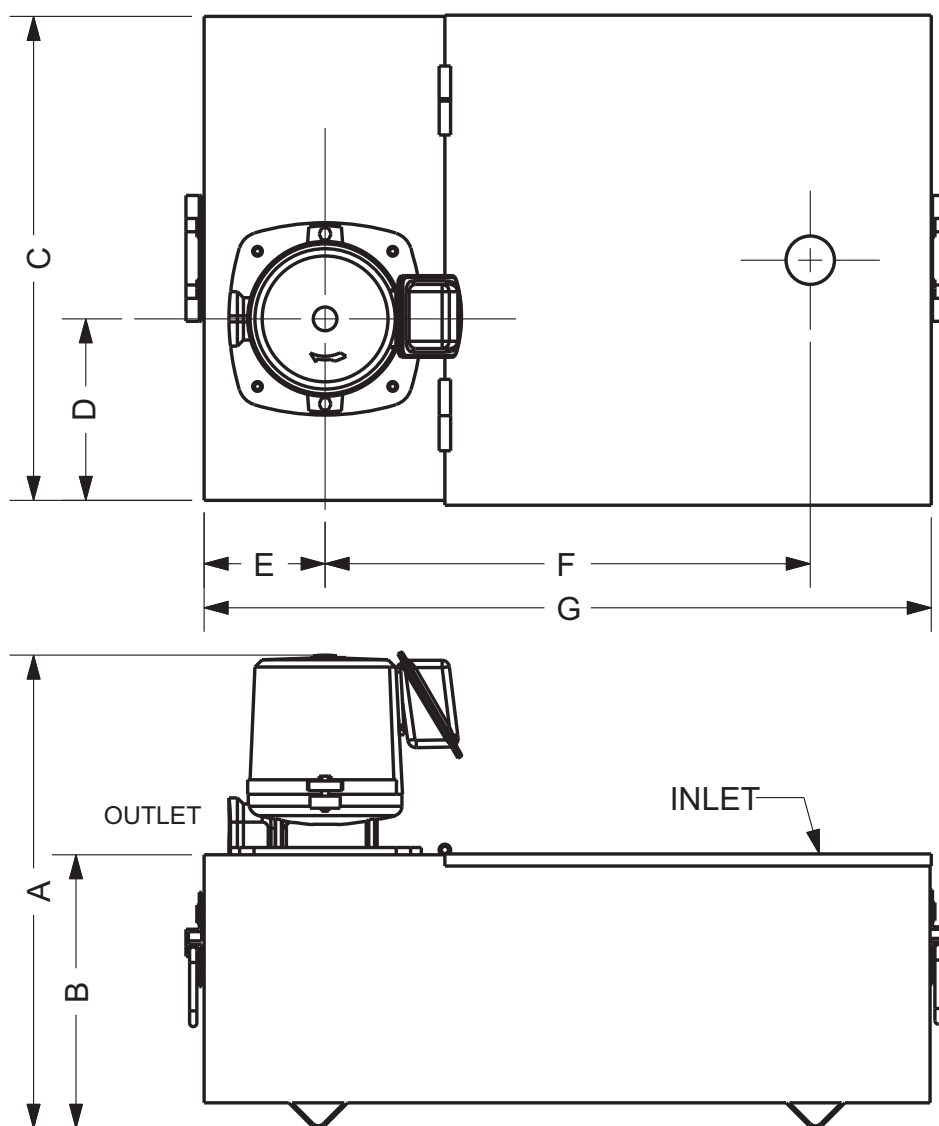

大港泵浦自1977年創立, 初期以小型工業泵浦為主, 提供國內各車床與銑床製造商使用, 為促進產業升級, 當時即與工研院合作, 提供製造技術予國內泵浦業者, 其後, 為提升製造品質, 除通過歐盟CE認證外, 先後與美日泵浦製造業者交流, 合作關係一直維繫至今, 為服務眾多工具機製造商, 除美日當地經銷商外, 歐洲與澳洲皆可獲得即時技術支援與售後服務.

本公司主要產品包括冷卻泵浦, 油墨泵浦, 高壓冷卻泵浦, 及DIY水桶組等設備, 關於泵浦的使用和安裝, 若有任何疑問, 歡迎來電詢問.



經銷商

DAKANG PUMP INDUSTRIAL CO., LTD.

Tel : 886+4+2560 5699

Fax: 886+4+2566 8022

Mail: dakang.pump@msa.hinet.net

No.17, Chung Shan 12th RD.,
Taya, Taichung County,
42841 Taiwan