
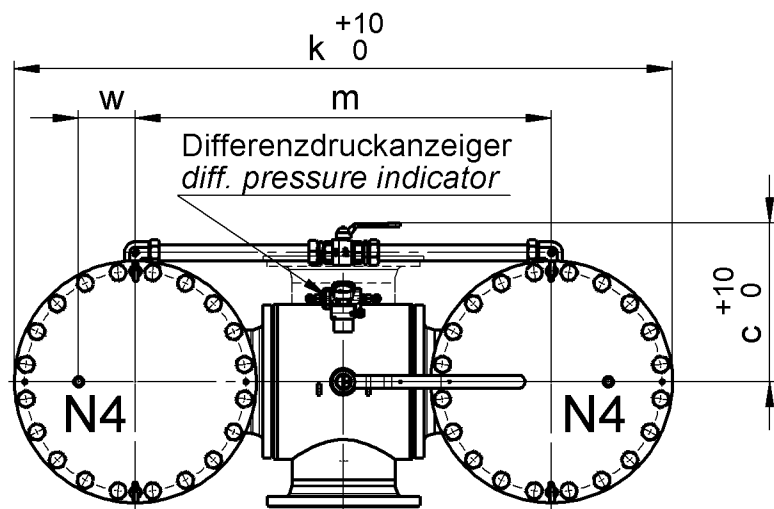
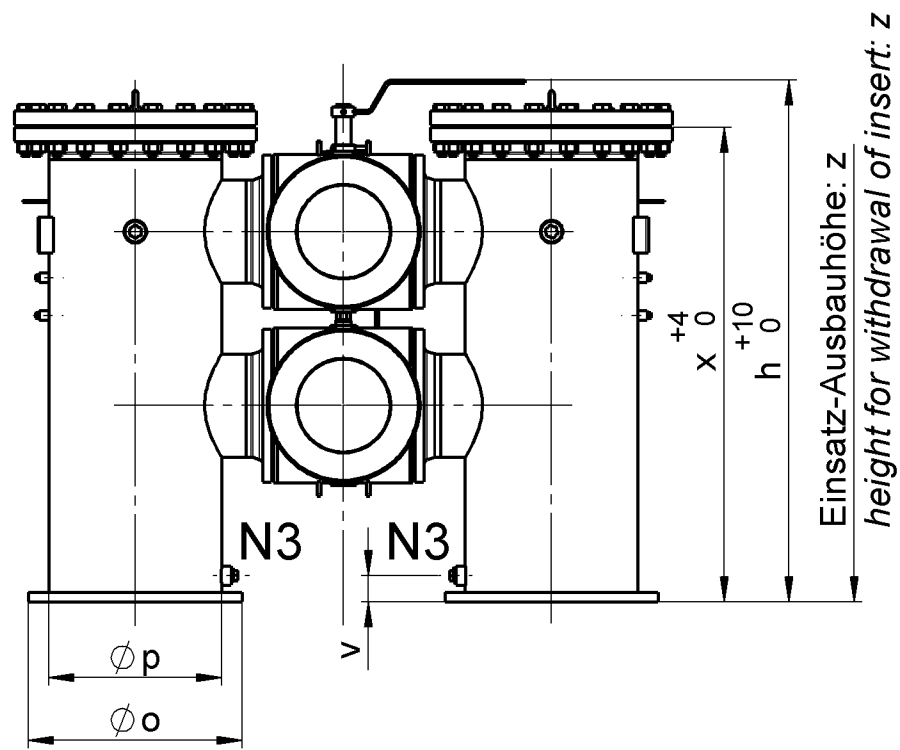


VS87 - FDE
welded version



FDE093*10A08	405	230	220	210	18	780	824	574	250	168	250	60	75	625	1060	145	2x 12
FDE103*10A09	480	230	250	280	18	800	975	660	285	219	250	60	75	625	1085	170	2x 16
FDE113*10A10	605	265	270	350	22	850	1200	794	405	273	330	70	100	800	1370	270	2x 45
FDE123*10A11	695	265	290	395	22	1020	1325	865	440	324	330	70	100	900	1500	410	2x 75
FDE143*10A12	750	300	320	445	22	1150	1480	960	490	356	400	70	100	990	1730	580	2x 160
FDE143*10A13	750	300	320	445	22	1150	1480	960	490	356	400	70	100	990	1730	580	2x 160
FDE153*10A14	980	330	430	515	26	1380	1744	1102	565	457	460	70	150	1260	2500	870	2x 200
FDE163*10A15	1110	375	500	725	30	1500	2200	1354	780	610	510	110	150	1410	2600	1200	2x 400
FDE173*10A15	1130	465	500	705	26	1760	2380	1540	755	610	620	110	150	1525	2700	2100	2x 410
FDE183*10A15	1160	460	500	725	30	1680	2320	1475	780	610	670	110	150	1525	2700	2400	2x 455
Bezeichnung <i>designation</i>	a	b	c	Øe	Øf	h	k	m	Øo	Øp	u	v	w	x	z	Gewicht (Kg) <i>weight (kg)</i>	Inh.(L) <i>vol.(l)</i>

Nur bis 10bar Betriebsdruck / *only 10bar operating pressure*

technical data is subject to change without notice.

Start start	03.07.2014		Buero depart.	200	Dok.-Art doc. type	250	Teildok. doc. part	000	Reifegrad design level	
Fert. fin.	03.07.2014	Erst. gen.	KANDORAS	Dok.-Nr. doc. no.	5050-20132110-S00				Version version	00