


Seal Rival-Y-Rings

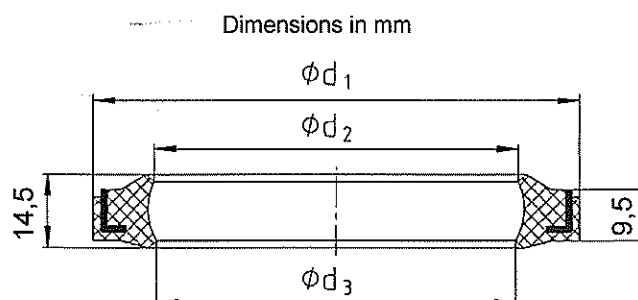


Rival-Y-rings are used for static sealing against utilities such as hot water, oils and greases up to 90°C.

Designation of a Rival-Y-ring, supplier's designation 20 – 180:

Rival-Y-ring SN 853 – 20 – 180

Matching reception bore:

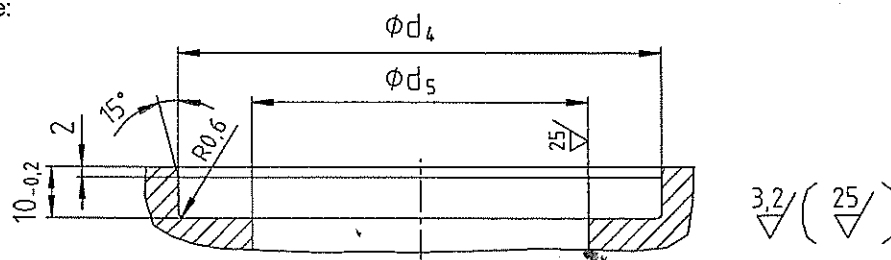

This copy will not be updated in case of changes!

Supplier's- designation	$d_1 +0,4$ $+0,2$	d_2	d_3	d_4^{H7}	d_5^1	Weight kg/piece
20-171	45	21	20	45	16	0,018
20-14032	45	26	25	45	21	0,015
20-173	57,15	33,15	32,15	57	28	0,026
20-174	69,85	45,85	44,85	70	40	0,032
20-175	69,85	51	50	70	46	0,029
20-176	75	51	50	75	46	0,035
20-177	82,55	58,55	57,55	82,5	53	0,039
20-178	85	61	60	85	56	0,041
20-179	90	66	65	90	61	0,043
20-180	95,25	71,25	70,25	95,5	66	0,046
20-181	100	81	80	100	76	0,048
20-182	105	81	80	105	76	0,052
20-183	111,125	87,125	86,125	111	82	0,055
20-184	120	96	95	120	91	0,061
20-185	140	121	120	140	116	0,068
20-186	145	121	120	145	116	0,074
20-187	149,225	125,225	124,225	149,5	120	0,076
20-188	155	131	130	155	126	0,080
20-189	170	146	145	170	141	0,088
20-190	193,675	169,675	168,675	193,5	164	0,101
20-191	195	171	170	195	166	0,102
20-192	210	186	185	210	181	0,110
20-193	250	226	225	250	221	0,126
20-194	270	246	245	270	241	0,144

Material: NBR-70 Shore / 1.4541

¹ d - also for -