



Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Signed	Approved

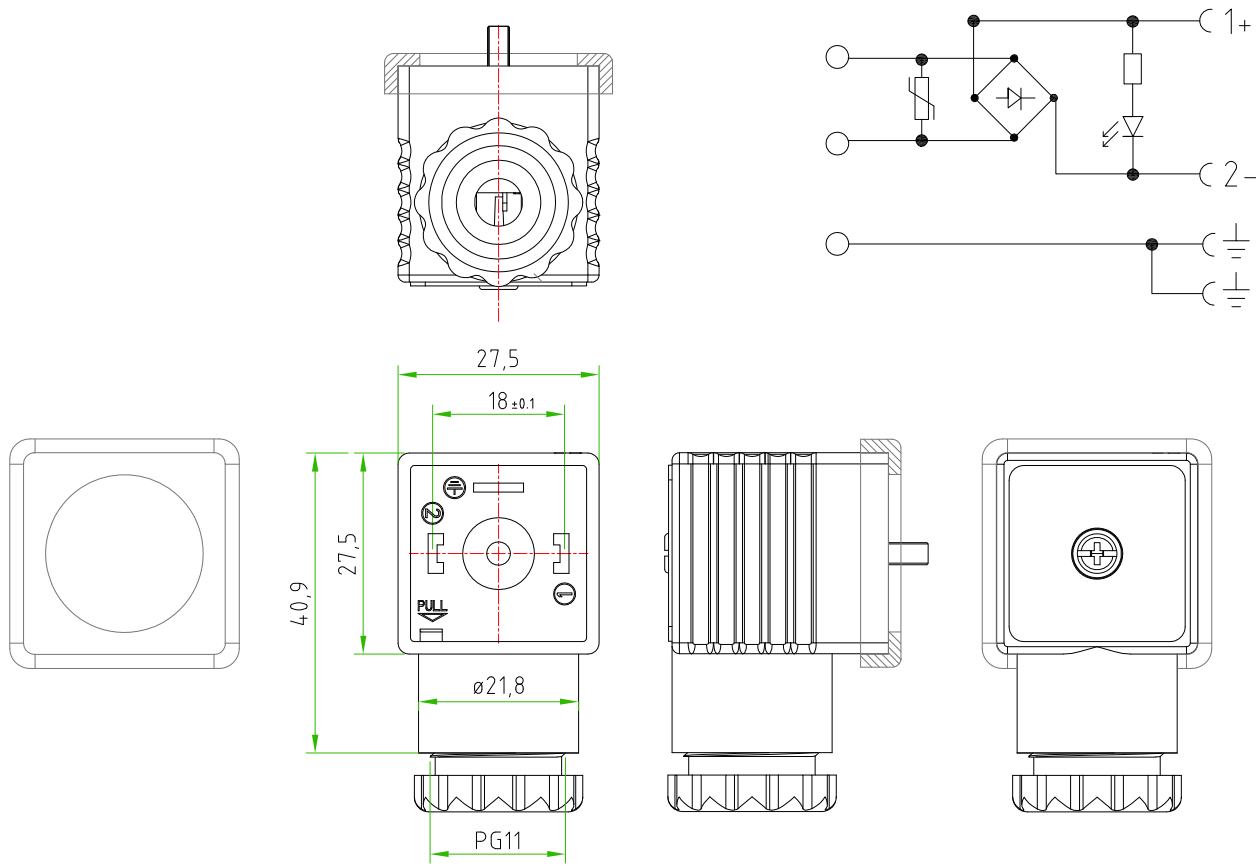

! PAY ATTENTION:
MUST BE USED THE SPECIAL INTERNAL
CORE FOR ELECTRONIC WITH BRIDGE
RECTIFIER



CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

CONNECTOR FEATURES	PRODUCT TYPE	EN175301-803 FORM A FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /TRASPARENT
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTRENAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	30mm
	CONTACTS SPACING	18mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.12 (TURNABLE)
	CABLE EXIT	PG9/11 UNIFIED
	SUITABLE CABLE	FROM ø6mm TO ø10mm
	MAX.CONDUCTOR SIZE	1,5mm ²
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	BRIDGE RECTIFIER(1A)-VARISTOR+RED LED N°1 VARISTOR: 05D201K N°1 BRIDGE RECTIFIER: DB107S N°1 UNIPOLAR RED LED
	RATED VOLTAGE	230V AC
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
	GASKET TYPE	PROFILED NBR
	FIXING SCREW	M3X0,5 L=32,5mm
	CONNECTOR WITH H.T.P. LOGO	

Designer	CIMMINO L.	Date	2018-05-08	Tolerance	±0,3	Units	mm	Series	EN175301-803 (form A)	Drawing n. 1-1
Approved	SUGLIANI R.	Date	2018-05-08	Scale	1:1	Size	A4	Customer code:		
  DESCRIPTION SQUARE CONNECTOR EN175301-803 FORM A, FIELD ATTACHABLE, 2P.+PE, WITH BRIDGE RECTIFIER+VARISTOR+UNIPOLAR RED LED, 230V AC, TRASPARENT HOUSING, PG9/11 unified. CONNECTOR WITH H.T.P. LOGO. H.T.P.PART NUMBER G1TU2RL3										