


Dimensions / connection acc. to DIN 11851

KN43, KN45

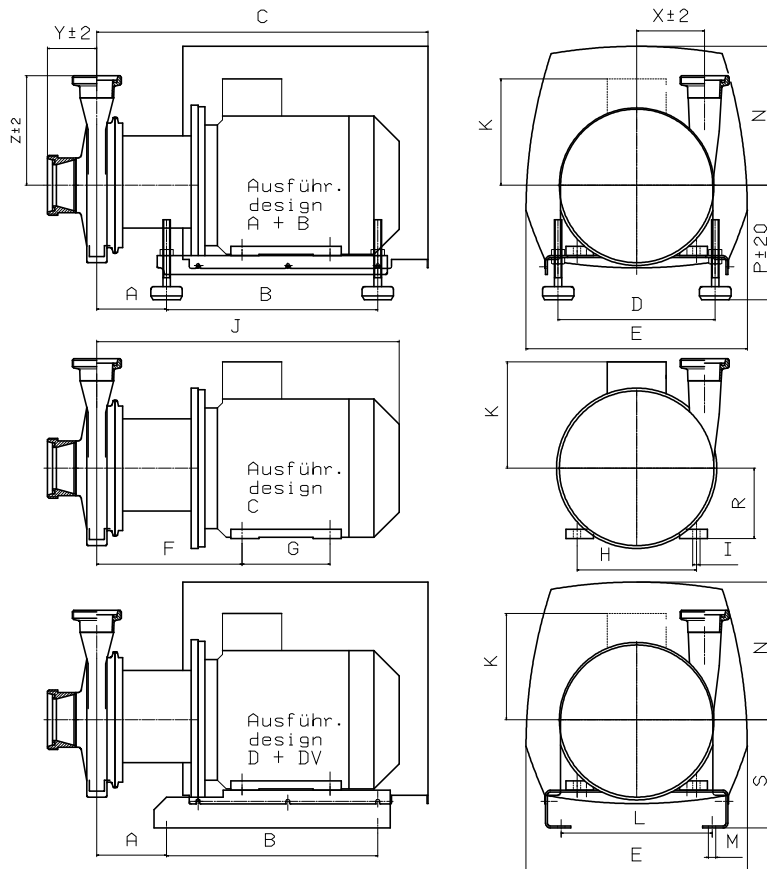

Type	Weights (kg)			kW	rpm		Motor IE2	Motor IE3	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T	U
	Design A+DV	Design B+D	Design C		50 Hz	60 Hz																					
KN43/1	52	43	36	2,2	1450	1750	100L		107	336	593	250	322	227	140	160	12	467	153	240	12	233	207	100	160	107	336
KN43/2	61	52	45	3,0	1450	1750	100L											507									
KN43/3	61	52	45	4,0		1750	112M		114	336	600	250	322	234	140	190	12	504	169	240	12	221	195	112	172	114	336
KN45/1.1	91	82	75	5,5	2900			112M	114	336	600	250	322	234	140	190	12	514	169	240	12	221	195	112	172	114	336
KN45/2.1	84	75	68	7,5	2900	3500		112M	114	336	600	250	322	234	140	190	12	544	169	240	12	221	195	112	172	114	336
KN45/3	98	89	80	9,2	2900	3500		132M	134	400	714	280	363	273	178	216	12	619	188	270	12	289	248	132	200	134	400
KN45/4.1	115	106	97	11,0	2900	3500		132M										639									
KN45/5	164	154	145	15,0	2900	3500		160M	197	490	824	300	423	327	210	254	14	736	250	300	13	283	282	160	230	217	450
KN45/6	167	157	148	18,5	2900	3500		160L	197	490	824	300	423	327	254	254	14	736	250	300	13	283	282	160	230	217	450
KN45/7.1	187	177	168	22,0	2900	3500		160L	197	490	824	300	423	327	254	254	14	766	250	300	13	283	282	160	230	217	450
KN45/8	278	268	259	30,0	2900	3500		180L	182	490	969	300	463	340	279	279	14	866	299	300	13	350	341	180	250	202	450

Inlet	50	65	65	80	80	80	100	100	100
Outlet	50	50	65	50	65	80	65	80	100
X	102	102	102	102	102	102	102	102	102
Y	90	90	90	86	86	86	87	87	87
Z	218	218	218	218	218	223	218	223	233