


# Dust - Liquid Coalescer Filter Cartridge P-DLS-MT

## Performance Specifications:

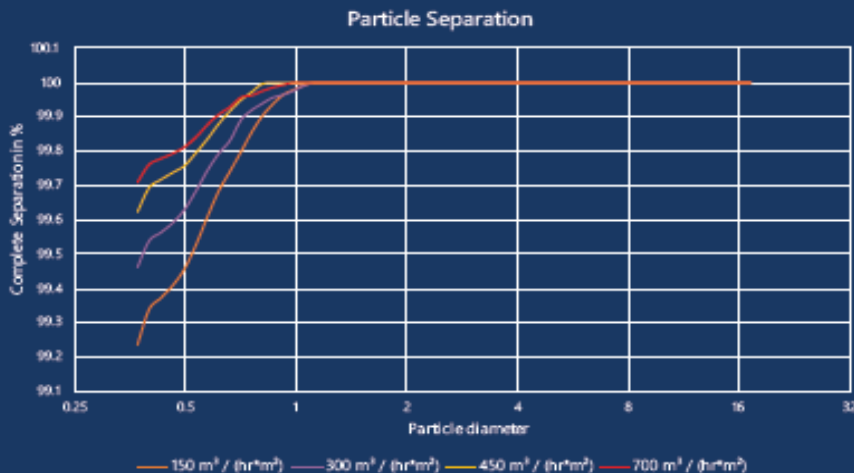

- Filter efficiency: refer to graph
- Flow direction: from inside to outside
- Maximum allowable differential pressure: 2 bar
- Recommended change cartridge differential pressure: 800-1000 mbar
- Maximum operating temperature: 120°C short peak temperatures of max. 150°C (max. 20 min.) are acceptable

## Product Specifications:

### Materials of Construction

1. Inner Core: Q235 perforated galvanized steel
2. Prefilter Media: pleated microfiberglass coalescing media, a resin
3. Outer Core: Q235 perforated galvanized steel
4. Coalescing Media: densely wrapped layers of glass microfibers
5. End Caps: Q235 galvanized sheet steel
6. Gaskets: Wool felt

### Dimensions (in mm)

- L. Length: 500/600/735/750/835/1100
- D1. Inside diameter: 90/160/170/220/270/350
- D2. Outside diameter: 150/230/232/240/280/330/410
- Other dimensions on request

