


**Belling Lee**


**L1301/1 PATTERN 1 TERMINAL, PANEL SEALED**



Qualification approved for Service's use and panel sealed. Slotted construction to effect quick connection. The head is captive.

<b>CURRENT RATING:</b>	<b>10A</b>
<b>TEMPERATURE RANGE:</b>	<b>-25°C to +85°C</b>
<b>MATERIALS:</b>	<b>Head, phenolic resin Stem, brass, nickel plated, solder spill tin dipped</b>
<b>COLOUR:</b>	<b>Black</b>
<b>WEIGHT:</b>	<b>12.0g average</b>
<b>LEAKAGE, WHEN USED WITH 01 PANEL FITTING:</b>	<b>≤1 cc/h @ 20 lbf / in 138 kPa</b>
<b>HUMIDITY:</b>	<b>H1</b>
<b>WIRE SIZE (MAXIMUM):</b>	<b>1.5mm diameter</b>

**ORDERING REFERENCE: L1301/1**

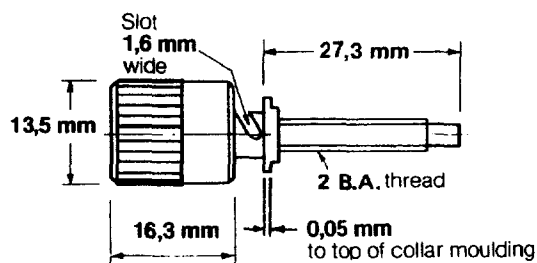

BLP reserve the right to change without prior notice the information contained within this leaflet

BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: [blp@roxboro.com](mailto:blp@roxboro.com) <http://www.blpcomp.com>

BLPCS00020