

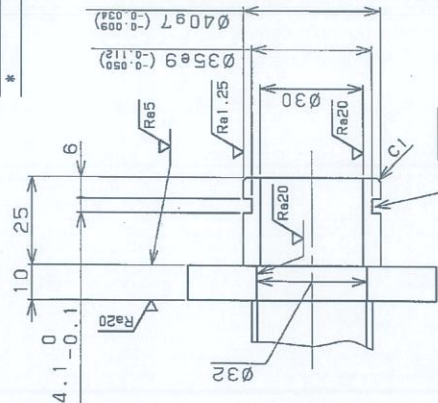


Parts to be arranged by JTEXT (Standard parts/IES)	Quantity
PG-EM-35	1
TA-BA-6X25	4
WS-P1-6	4
*	*
*	*

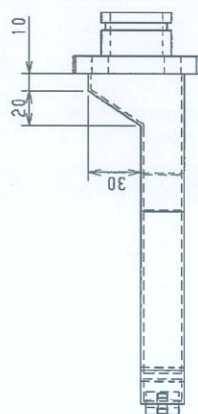

SECTION A-A
(TO BE MACHINED BEFORE WELDING)
(1:1)

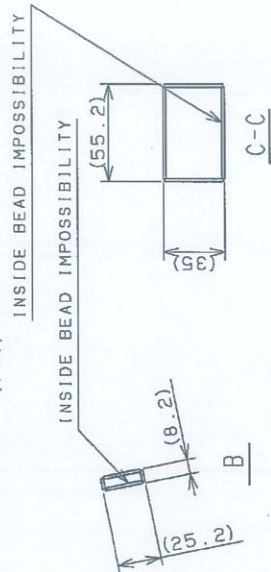

NOTE

1. THE THICKNESS OF THE PLATE UNLESS OTHERWISE SPECIFIED SHOULD BE 11.6.
2. CONNECTED PORTION SHOULD BE WELDED AT ALL PERIPHERY NOT TO LEAK WATER. (USE OF SEAL AGENT IS NOT ALLOWED. APPLY ALCOON WELDING.)
3. THE HEIGHT OF BEAD AT THE WELDED PORTION OF 11.6 PLATE SHOULD BE 1mm OR LESS, AND THE FINISHING BY THE SANDER IS NOT ALLOWED.

Material	SPHC, SS400P, SS400B	Heat/Surface Treatment	*
(J) #		Scale	JTEKT's Machine model
(C) #		Projection	GF50M
Type	#	Notes	
△	X	X	X
SM, TOT		REV, Approved	Checked
Description of revision		Designated	Date/By/No
Approved	Checked	Designated	Date/By/No
山崎		(J) ノズル, クラント	
M. Aoyama		(C) NOZZLE, COOLANT	
2012/10/16		Name	川島
		2012/10/16	
		Drawn No.	RF50311011AA
JTEKT CORPORATION			
P	2	RF--5031	*
NKL	XXXXXX	MGH	*
		クラントシャフト	新・味・国 1 編目 1

Outside this frame is only used by JTEXT

PN-CC002013-C

アスベスト、PCBを含む材料の使用を禁ずる。
The use of asbestos and PCBs is prohibited.
株式会社ジェイテックはこの問題が日本に提示された対応策に際して、同社の製品の多く、その多く又は一部が必ずしも適合してはいない。
JEK CORPORATION has the regret that many of its products, many of them or some part of them do not conform to the requirements of the law.
JEK CORPORATION has the regret that many of their prior shipments of JEK CORPORATION.