
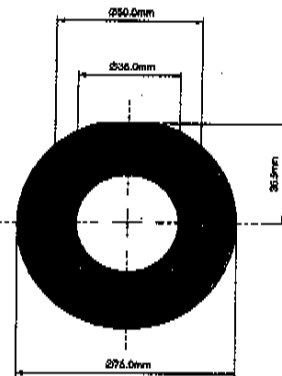
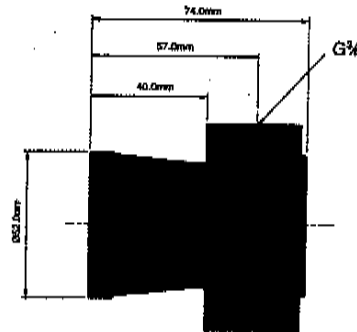


BRAUER®

KEWESTA GMBH
Industriestraße 2
63526 Erlensee

AM35 FIXED GAP AIRMOVER

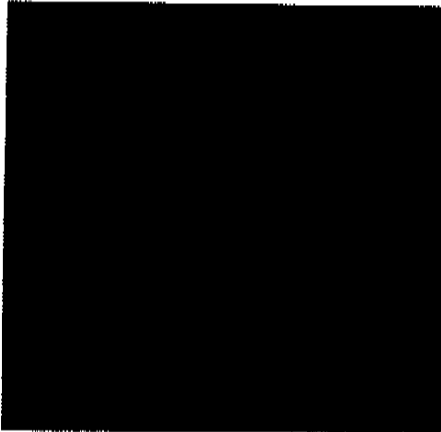

Material: Zinc and aluminium alloy.

Weight: 0.19Kg

Standard Gap: 0.05mm

dB(A) at: 5.5 bar is 80


Shims: Not required

Standard Inlet Thread: G3/4




Options: 1/2" NPT

Please specify on order 1/2" NPTF

Bar	Vol In m³/min	Vol out m³/min
1.38	0.193	2.350
2.76	0.326	3.361
4.14	0.484	4.621
5.52	0.631	5.207

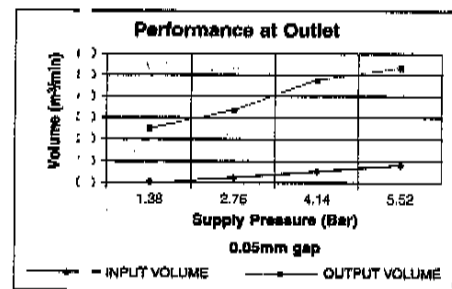

AM40 FIXED GAP AIRMOVER

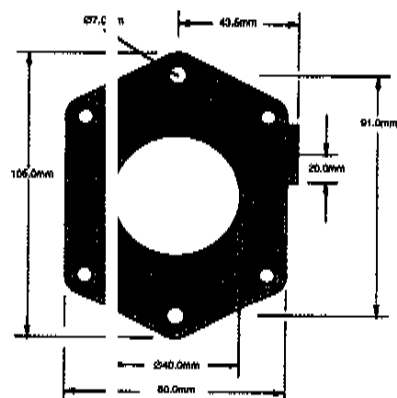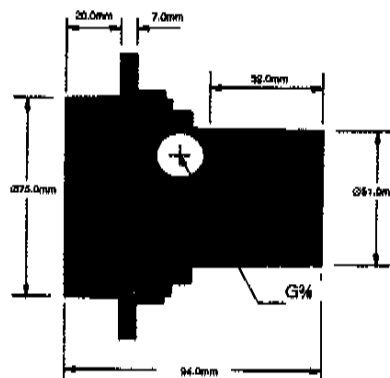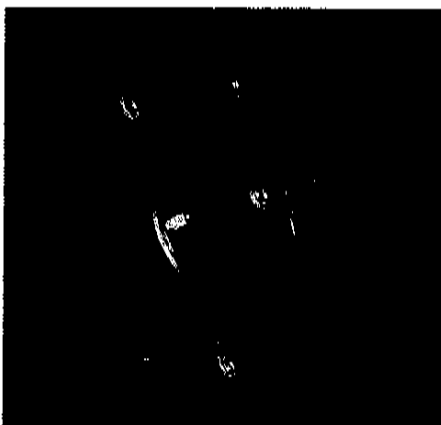

Material: Zinc and aluminium alloy.

Weight: 0.900Kg

Standard Gap: 0.05mm

dB(A) at: 5.5 bar is 80

Shims: 0.04, 0.05, 0.08mm

Optional extra


Standard Inlet Thread: G3/4

Options: 1/2" NPT

Please specify on order 1/2" NPTF

Replacement shims

Bar	Vol In m³/min	Vol out m³/min
1.38	0.207	3.256
2.76	0.323	5.182
4.14	0.439	6.513
5.52	0.555	8.297

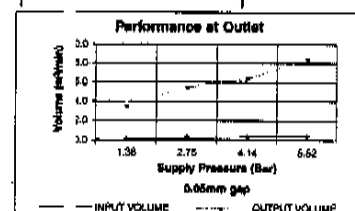

PERFORMANCE DATA - DU

METRIC	Back Pressure (min water gauge) and gull						In equivalent pipe length			
	Supply Pressure kg/cm²	V1 m³/min	Vc m³/min	Equip. Pipe length m	Va m³/min	Equip. Pipe length m	200mm water gauge	Equip. Pipe length m	Vb m³/min	Equip. Pipe length m
2	.26	1.22	1.00	10	1.00	29	1.00	58	1.33	43
3	.36	1.97	1.44	4	1.44	14	1.80	18	2.20	15
4	.42	2.88	2.20	2	2.20	6	2.63	9		
5	.60	4.14	3.08	1	3.08	3				
6	.68	5.41	4.25	0.8	4.25	2				