

PRODUCT SHEET

6.3.2 LEVER, TYPE L

Application:

For the quick manual operation of Wouter Witzel valves up to and including DN 300 (12"). For open/close or regulating purposes.


Product description:

- Fits to all Wouter Witzel valves up to and including DN 300 (above DN 200 for low pressure applications only)
- Length depending on valve size
- Easy operating
- Lever made of malleable cast iron (bending on site is possible by heating)
- Notch plate made of zinc plated steel
- Notch plate with 10 positions

Options:

- Various padlock facilities (figure 1)
- Limit switches for position monitoring (figure 2)
- Special notch plate for regulating purposes (figure 3)
- Stainless steel notch plate
- L-short, extra short execution (only L1 and L2)

Figure:

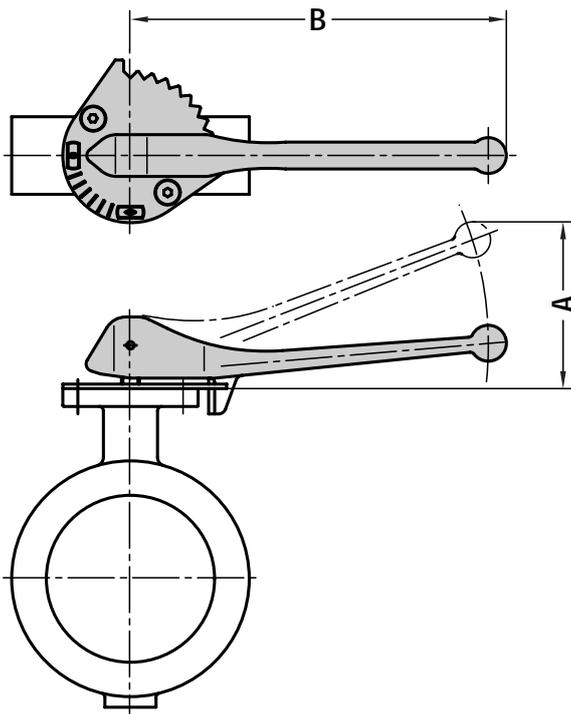

Options:




FIG. 1: LEVER + PADLOCK FACILITY




FIG. 2: LEVER + SWITCHES




FIG. 3: LEVER FOR REGULATING

Dimensions:			
Lever	A	B	KG
L1	112	250	1
L2	112	250	1
L3	121	315	1,4
L4	184	500	3,2

Selection of lever, type L:				
DN	2,5 bar	6 bar	10 bar	16 bar
50 - 80 (2"-3")	L1	L1	L1	L1
100 - 125 (4"-5")	L2	L2	L2	L2
150 - 200 (6"-8")	L3	L3	L3	L3
250 (10")	L4	-	-	-
300 (12")	L4	-	-	-