






## Tiper1

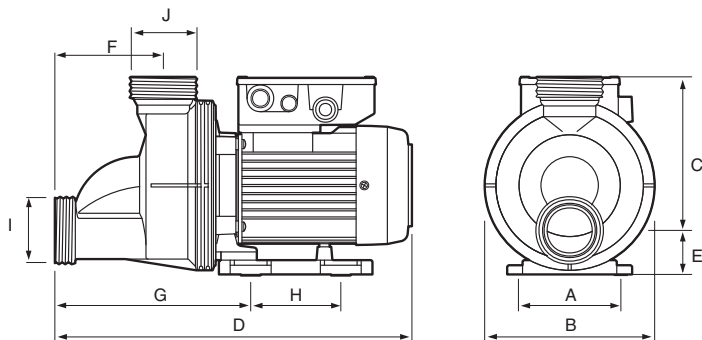

|                  | A   | B   | C   | D   | E  | F   | G   | H  | I                 | J                 | Kg  |
|------------------|-----|-----|-----|-----|----|-----|-----|----|-------------------|-------------------|-----|
| <b>Tiper1 70</b> | 100 | 166 | 150 | 348 | 43 | 106 | 190 | 88 | 2 <sup>1/4"</sup> | 2 <sup>1/4"</sup> | 4,0 |
| <b>Tiper1 90</b> | 100 | 166 | 150 | 348 | 43 | 106 | 190 | 88 | 2 <sup>1/4"</sup> | 2 <sup>1/4"</sup> | 4,5 |

Curvas de funcionamiento a 2900 r.p.m.  
Performance curves at 2900 r.p.m.

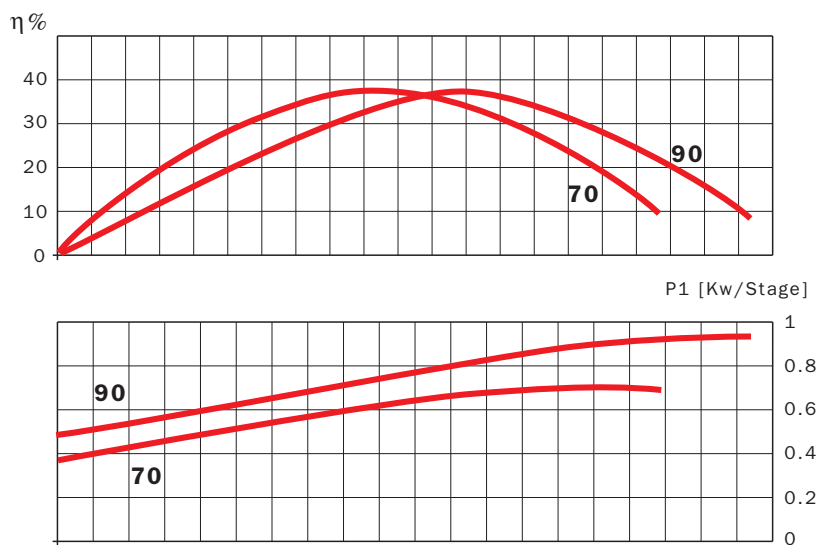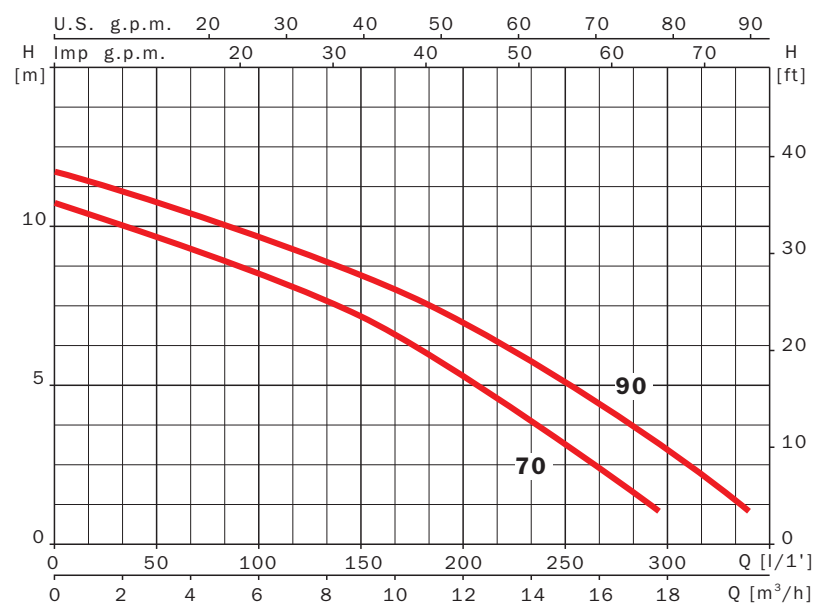

| 230 V<br>50 Hz    | 230/400 V<br>50 Hz | A           |             |             | P1 (kW) |    | kW   | HP  | μF | l/1'<br>m³/h | 50   | 100 | 150 | 175  | 200 | 250 | 300 | 340  |
|-------------------|--------------------|-------------|-------------|-------------|---------|----|------|-----|----|--------------|------|-----|-----|------|-----|-----|-----|------|
|                   |                    | 1~<br>230 V | 3~<br>230 V | 3~<br>400 V | 1~      | 3~ |      |     |    |              | 3    | 6   | 9   | 10.5 | 12  | 15  | 18  | 20.4 |
| <b>Tiper1 70M</b> |                    | 3.1         |             |             | 0.7     |    | 0.37 | 0.5 | 12 |              | 9.6  | 8.5 | 7   | 6.2  | 5.1 | 3   |     |      |
| <b>Tiper1 90M</b> |                    | 4.2         |             |             | 0.9     |    | 0.75 | 1   | 12 |              | 10.8 | 9.8 | 8.5 | 7.8  | 7   | 5   | 3   | 1    |