


8mm Tri Head
Chrome Spanner Lock
(BL-LK0013)


Tofco Label

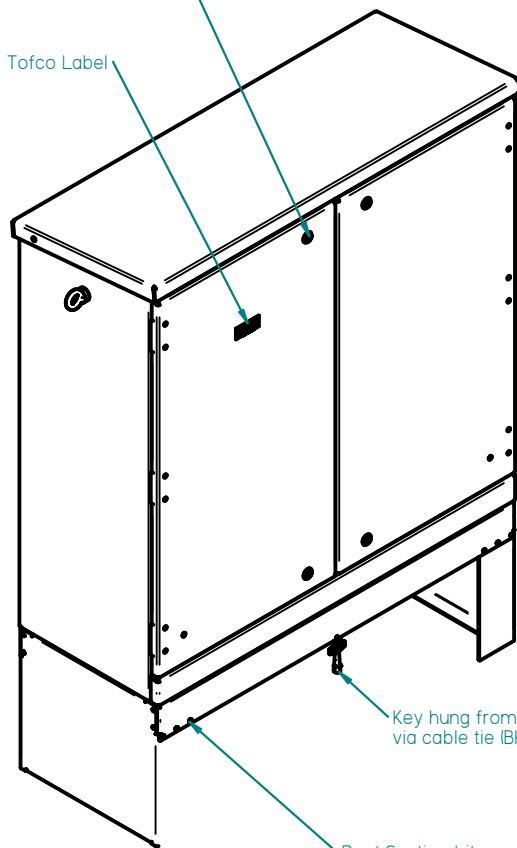



Key hung from root section
via cable tie (BK-KEY/R)

Root Section bitumen coated

Backboard: 1000 x 1150 x 18mm - exterior grade ply-wood
treated with anti-fungicidal preservative

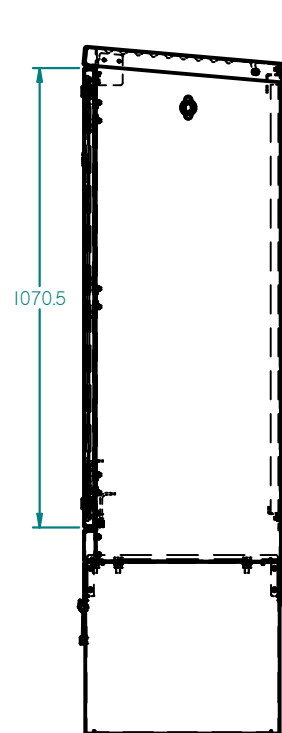

Tubular Compression Gasket
fitted around door frame

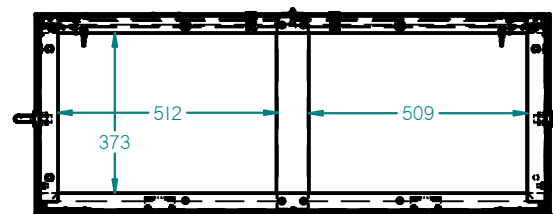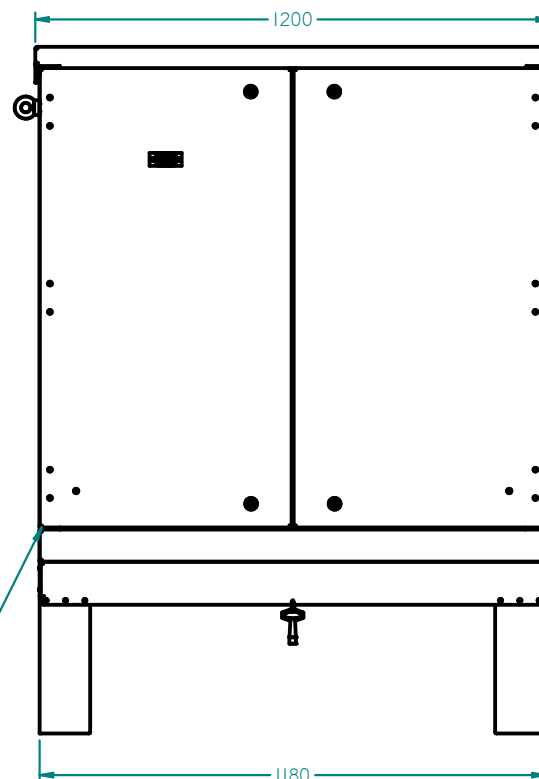

Material: 3mm Galv sheet

Finish: Zinc rich primer + Powder coated Leatherette (Colour TBC)

Approx Feeder Pillar assembled weight: 177KG

Remove all bend reliefs when programming.
All folded corner seams must be tight (no gaps).
All clinch studs to be fitted flush so they are not
visible after painting.
All earth points to be fitted with Brass nuts and
washers and earth cable.

Dimensions: mm, Tolerance: +/- 1.0mm

REVISION No	DESCRIPTION OF MODIFICATION	DATE	TOFCO CPP LTD		DRAWING TITLE:	SHEET	DRAWN	CHECKED	APPROVED	DATE
08	1 Piece Wrap + Eye Bolt	3/3/16			FPA340 Feeder Pillar (weld free)	1 of 15	DGB			15/11/10
			THIS DOCUMENT IS THE PROPERTY OF TOFCO CPP LIMITED AND IS SUPPLIED IN CONFIDENCE. IT MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION IN WRITING FROM THE OWNER.			PART No.		DRAWING No.		
						A-FP340/3004A		FPA340		